
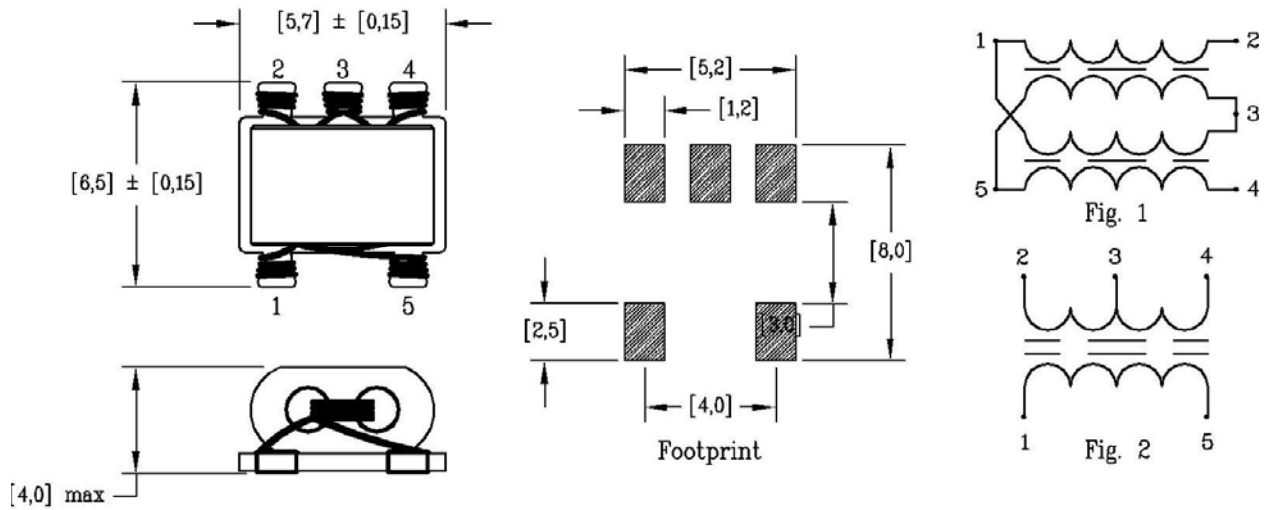


SMT5-XXXX

SMT wideband transformer

- Compact design
- Ceramic mounting base
- Temperature range, -40 °C to 125 °C
- Resistance to soldering heat 230 °C, 5 seconds
- RoHS compliant per 2002/95/EC
- Packaging, 1000pcs, 12mm blisterpack



Dash #	“-1db” Freq. (MHz)	“+1db” Freq. (MHz)	“-3db” Freq. (MHz)	“+3db” Freq. (MHz)	A ₀ max (db)	Turns	Figure
-0000	< 20	> 400			0.8	4 x 4.5	Fig 1
-0001	< 20	> 750			0.8	4 x 2.5	Fig 1
-0002			< 1	> 300	0.2	3 x 5	Fig 2

Rev B, 12/09

TYPICAL RESPONSE
SMT5-0000



TYPICAL RESPONSE
SMT5-0001

