


FL14-XXXX

Vertical mount inductor

- Inductance range, 4.7uH – 120uH
- Inductance test level, 50mV
- Temperature range, -40 °C to 125 °C
- Soldering temperature 235 °C, 5 seconds
- Resistance to soldering heat 260 °C, 5 seconds
- Lead pull strength, 20N minimum
- Maximum power loss @ 40 °C, 1.8 W
- RoHS compliant per 2002/95/EC

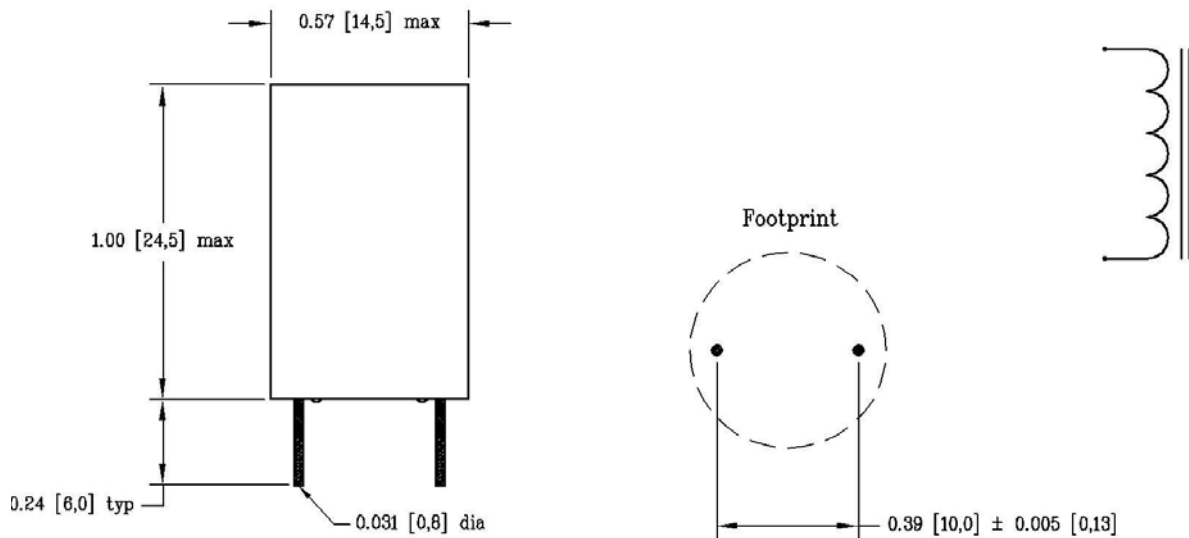

Dash #	“L” ± 10% (uH)	“SRF” min (MHz)	“DCR” max (mΩ)	“I” max (A)
-0001	4.7	30	11	12.5
-0002	6.8	25	14	11.0
-0003	10	20	21	8.5
-0004	15	15	26	8.0
-0005	22	10	31	7.5
-0006	33	6.5	45	6.0
-0007	39	5.0	50	6.0
-0008	47	3.5	55	5.5
-0009	56	3.0	60	5.0
-0010	68	2.5	80	4.5
-0011	120	2.0	130	3.5