
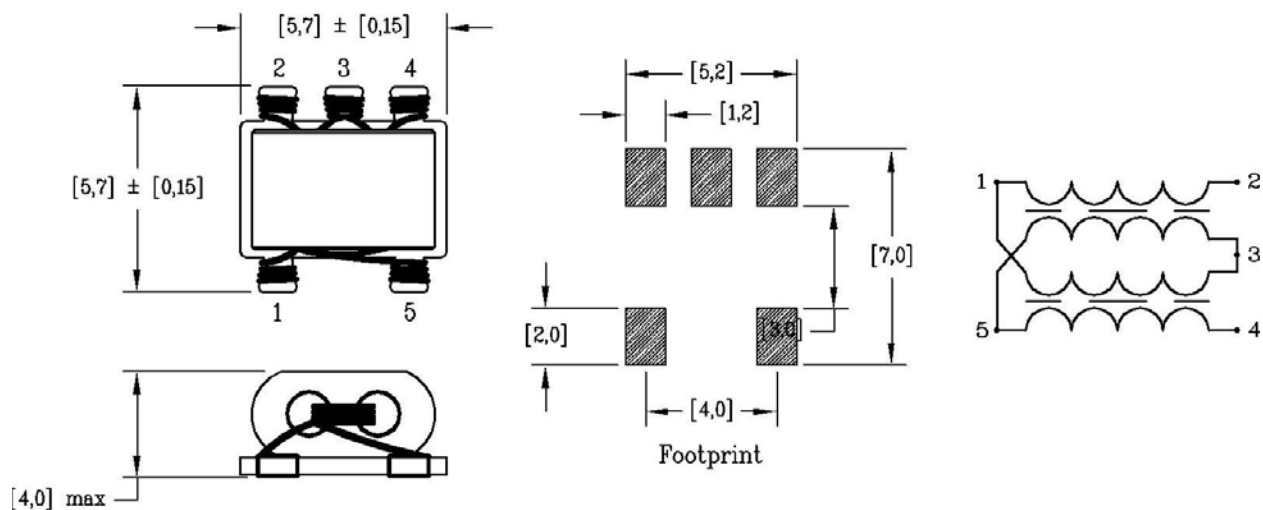


SMT4-XXXX

SMT directional coupler

- Compact design
- Ceramic mounting base
- Temperature range, -40 °C to 125 °C
- Resistance to soldering heat 230 °C, 5 seconds
- RoHS compliant per 2002/95/EC
- Packaging, 2000pcs, 12mm blisterpack



Dash #	“-3db” Freq. (kHz)	“+3db” Freq. (MHz)	A ₀ max (db)	Coupling (db)
-0002	< 800	> 1200	2.0	8
-0003	< 800	> 1100	2.8	6
-0004	< 500	> 900	1.2	10
-0005	< 500	> 1500	0.6	16
-0010	< 500 (-1db)	> 200 (+1db)	0.2	

Rev B, 12/09

TYPICAL COUPLING



TYPICAL DIRECTIVITY

