


SML6-XXXX

Surface mount, common mode filter

- Compact design
- Soldering temperature 230 °C, 5 seconds
- Single layer winding for minimum capacitance
- Inductance balanced within 1% (1-8 & 4-5)
- Dielectric strength, 1500Vdc between windings
- Temperature class, 130 °C
- Inductance test level, 10kHz @ 10mV
- RoHS compliant per 2002/95/EC
- Packaging, 600pcs, 24mm blisterpack

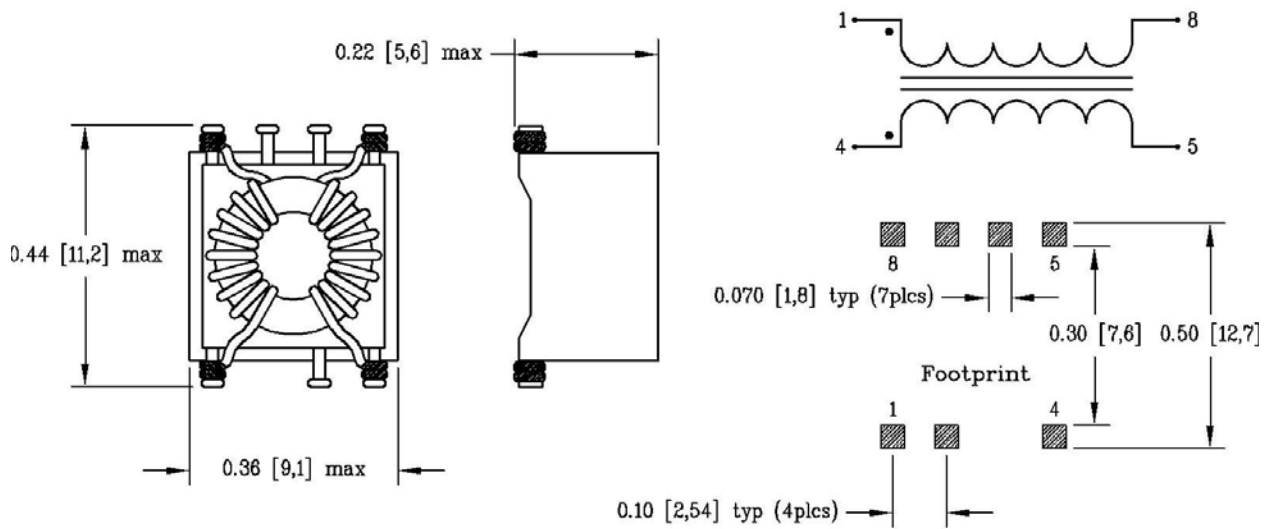

Dash #	“L” +30/-40% (uH)	“DCR” max (mΩ)	“I” max (Amps)
-0010	10	11	3.5
-0020	20	15	3.5
-0040	40	18	3.0
-0060	60	20	3.0
-0120	120	25	2.5
-0155	155	40	2.0
-0240	240	50	1.5
-0345	345	60	1.5
-0540	540	70	1.5
-0960	960	180	1.0