


A2D8-XXXX

SMT 2-D Transponder Coil

- Antenna applications
 - Keyless entry, Keyless go, RFID
- Compact design, low height, Isotropic
- Open with “pick & place” surface
- Reflow solder rating: 260°C for 10sec
- Operating temperature: -40°C to +125°C
- RoHS compliant per 2002/95/EC
- Custom values available

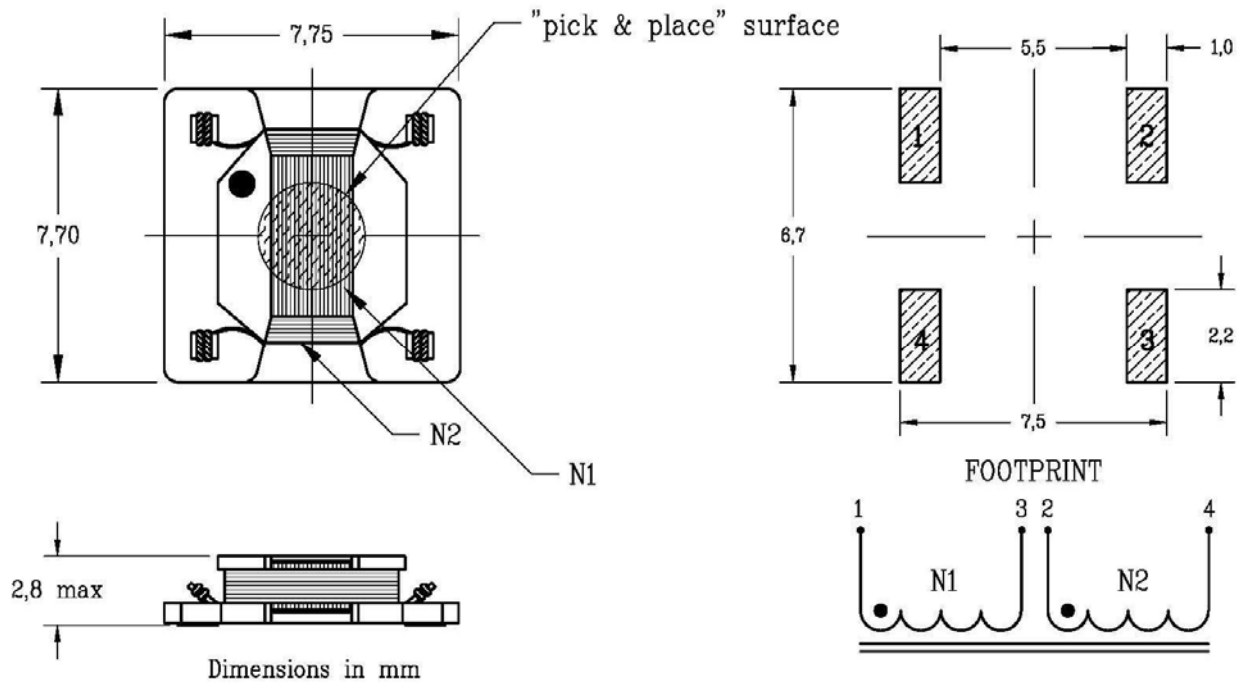

Dash #	“L” (mH) $\pm 3\%$ N1 / N2	Test Freq. (kHz)	“Q” min N1 / N2	Sensitivity [mV/A/m] min	“DCR” (Ω) $\pm 5\%$
-0001	4.09 / 5.87	125	23 / 26	45 / 45	78 / 114

Rev -, 8/09