


AZ10-XXXX

Z-Axis Antenna Coil

- Antenna applications
 - Keyless entry, Keyless go, RFID
- Compact design, low height
- Reflow solder rating: 260°C for 10sec
- Operating temperature: -40°C to +125°C
- RoHS compliant per 2002/95/EC
- Packaging: 1600pcs, 24mm blisterpack
- Custom values available

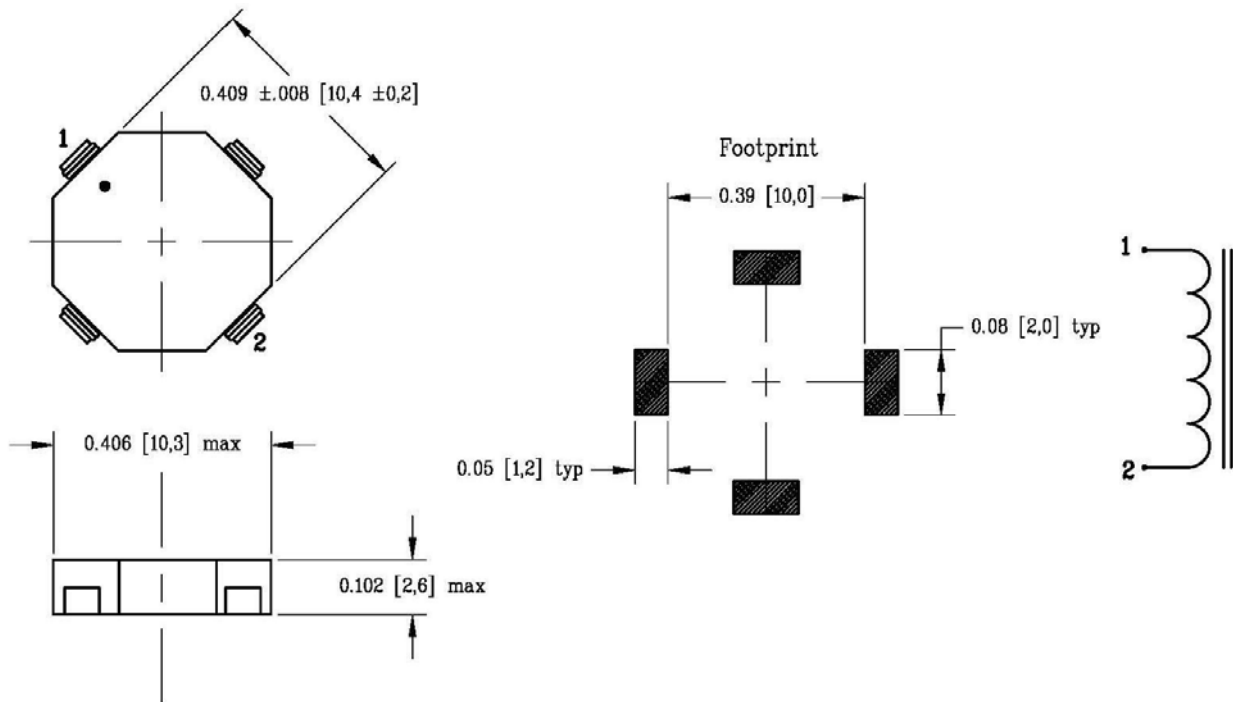

Dash #	“L” ± 6% (mH)	@ “F” (KHz)	“Q” min	“DCR” ± 10% (Ω)
-0006	0.56	125	80	3.0
-0012	1.2	100	55	5.5
-0022	2.2	125	80	11
-0072	7.2	125	60	32
-0523	52.3	19.2	15	170
-0650	65.0	19.2	15	230