


# CMU6-XXX

Bobbin wound, common mode filter

- High inductance values
- Inductance balanced within 1% (1-2 & 4-3)
- Dielectric strength, 2000Vrms between windings
- Creepage distance 5mm minimum
- Temperature class, 105 °C
- Inductance test level, 10kHz @ 10mV
- RoHS compliant per 2002/95/EC

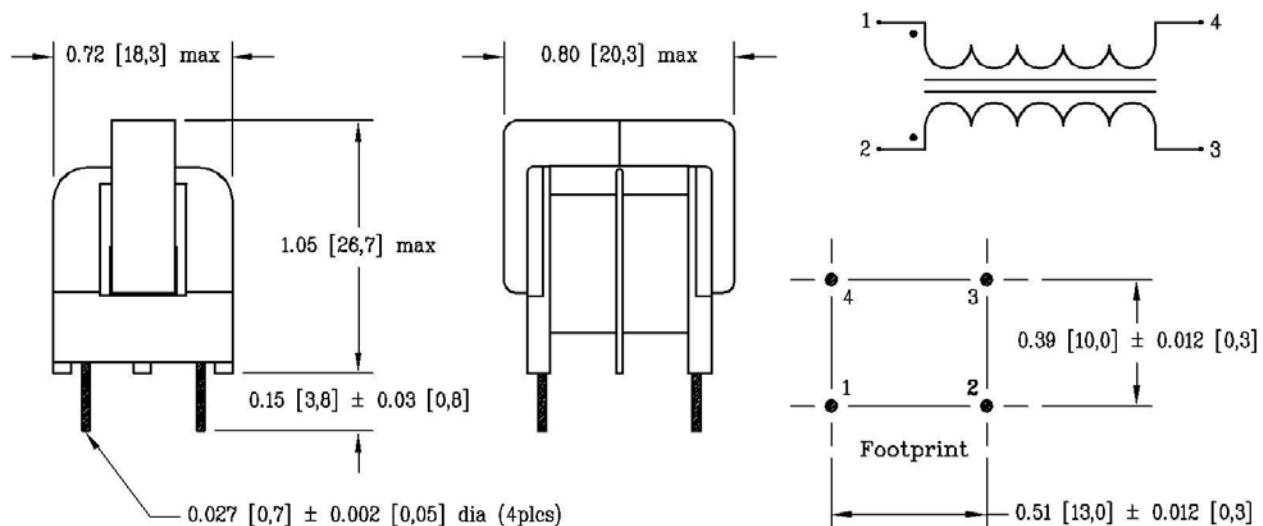

Dash #	“L” min (mH)	“DCR” max (mΩ)	“T” max (Amps)
<b>-000</b>	1.0	35	4.0
<b>-001</b>	1.7	59	3.2
<b>-002</b>	2.1	81	2.5
<b>-003</b>	2.7	119	2.0
<b>-004</b>	4.0	183	1.6
<b>-005</b>	5.3	267	1.3
<b>-007</b>	6.8	420	1.0
<b>-010</b>	10	670	0.80
<b>-012</b>	12	900	0.64
<b>-019</b>	19	1.4 Ω	0.50
<b>-026</b>	26	2.2 Ω	0.40
<b>-043</b>	43	3.4 Ω	0.32
<b>-104</b>	104	6.8 Ω	0.25