

# 1N5820 - 1N5822

**PRV : 20 - 40 Volts**  
**I<sub>o</sub> : 3.0 Ampere**

## FEATURES :


- \* High current capability
- \* High surge current capability
- \* High reliability
- \* High efficiency
- \* Low power loss
- \* Low cost
- \* Low forward voltage drop
- \* Pb / RoHS Free

## MECHANICAL DATA :

- \* Case : DO-201AD Molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 1.1 grams

# SCHOTTKY BARRIER RECTIFIER DIODES

## DO-201AD

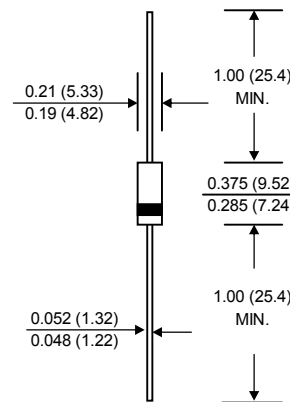

Dimensions in inches and ( millimeters )

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

RATING	SYMBOL	1N5820	1N5821	1N5822	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	20	30	40	V
Maximum RMS Voltage	V <sub>RMS</sub>	14	21	28	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	30	40	V
Maximum Average Forward Current 0.375", 9.5mm Lead Length at T <sub>L</sub> = 95 °C	I <sub>F(AV)</sub>	3.0			A
Maximum Peak Forward Surge Current, 8.3ms single half sine wave Superimposed on rated load (JEDEC Method) T <sub>L</sub> = 75°C	I <sub>FSM</sub>	80			A
Maximum Forward Voltage at I <sub>F</sub> = 3.0 A (Note 1)	V <sub>F</sub>	0.475	0.500	0.525	V
Maximum Reverse Current at T <sub>a</sub> = 25 °C	I <sub>R</sub>	2.0			mA
Rated DC Blocking Voltage (Note 1) T <sub>a</sub> = 100 °C	I <sub>R(H)</sub>	20			mA
Typical Thermal Resistance (Note 2)	R <sub>θJL</sub>	20			°C/W
Junction Temperature Range	T <sub>J</sub>	- 65 to + 125			°C
Storage Temperature Range	T <sub>STG</sub>	- 65 to + 125			°C


### Notes :

(1) Pulse Test : Pulse Width = 300 μs, Duty Cycle = 2%.


(2) Thermal Resistance from Junction to Lead Vertical PC Board Mounting, 0.5" (12.5mm) Lead Lengths with 2.5 in<sup>2</sup> (63.5mm<sup>2</sup>) copper pads.

**RATING AND CHARACTERISTIC CURVES ( 1N5820 - 1N5822 )**


**FIG.1 - FORWARD CURRENT DERATING CURVE**

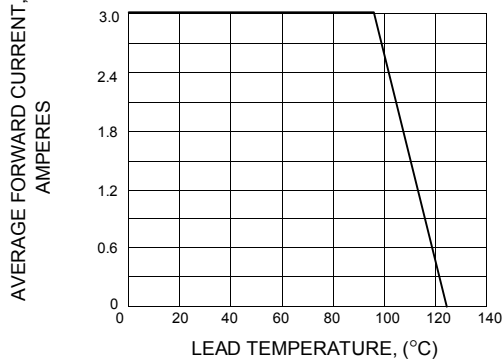

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

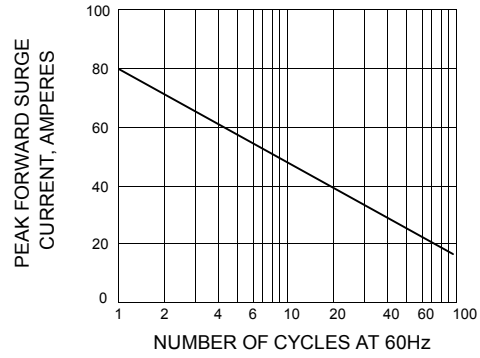

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS**

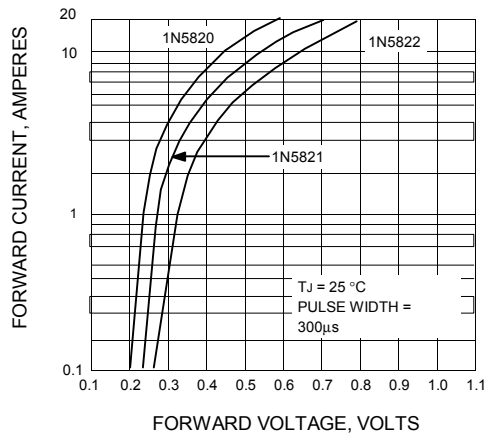

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

