

# SIEMENS

## S 041 P FM IF Amplifier with Demodulator

S 041 P is a symmetrical, six-stage amplifier with symmetrical coincidence demodulator for amplifying, limiting, and demodulating frequency-modulated signals. The IC is particularly suited for sets where low current consumption is of importance, or where major supply fluctuations occur.

The pin configuration corresponds to the well-known TBA 120. Pin 5 of S 041 P, however, is not connected internally. These types are especially suited for applications in narrow-band FM systems (455 kHz) and in conventional or standard FM IF systems (10.7 MHz).

### Features

- Good limiting properties
- Wide voltage range
- Low current consumption
- Few external components

### Maximum ratings

Supply voltage	$V_S$	15	V
Junction temperature	$T_j$	150	°C
Storage temperature range	$T_{stg}$	-40 to 125	°C
Thermal resistance (system-air)	$R_{th, SA}$	90	K/W

S 041 P

### Operating range

Supply voltage range	$V_S$	4 to 15	V
Frequency range	$f_i$	0 to 35	MHz
Ambient temperature range	$T_{amb}$	-25 to 85	°C


8

Characteristics ( $V_S = 12\text{ V}$ ,  $Q$  approx. 35,  $f_{mod} = 1\text{ kHz}$ ,  $T_{amb} = 25^\circ\text{C}$ )

	min	typ	max		
Current consumption	$I_B$	4.0	5.4	6.8	mA
AF output voltage ( $f_i = 10.7\text{ MHz}$ , $\Delta f = \pm 50\text{ kHz}$ , $V_i = 10\text{ mV}$ )	$V_{a\text{ rms}}$	100	170		mV
Total harmonic distortion ( $f_i = 10.7\text{ MHz}$ , $\Delta f = \pm 50\text{ kHz}$ , $V_i = 10\text{ mV}$ )	THD		0.66	1.0	%
Deviation of AF output voltage ( $V_S = 15\text{ V} \rightarrow 4\text{ V}$ , $f_i = 10.7\text{ MHz}$ , $\Delta f = \pm 50\text{ kHz}$ )	$\Delta V_{a\text{ rms}}$		1.6		dB
Input voltage for limiting ( $f_i = 10.7\text{ MHz}$ , $\Delta f = \pm 60\text{ kHz}$ )	$V_{i\text{ lim}}$		30	60	$\mu\text{V}$
IF voltage gain ( $f_i = 10.7\text{ MHz}$ )	$G_v$		68		dB
IF output voltage for limiting (each output)	$V_{a\text{ ddp}}$		130		mV
Input impedance $f_i = 10.7\text{ MHz}$	$Z_i$		20/2		k $\Omega$ /pF
$f_i = 455\text{ kHz}$	$Z_i$		50/4		k $\Omega$ /pF
Output resistance (pin 8)	$R_o$	3.5	5	9.5	k $\Omega$
Voltage drop at AF ballast resistance	$V_{11-8}$		1.5		V
AM suppression ( $V_i = 10\text{ mV}$ , $\Delta f = \pm 50\text{ kHz}$ , $m = 30\%$ )	$R_{AM}$		60		dB


All connections mentioned in the Index refer to S 041 P (e.g.  $V_{11}$ )

Test circuit

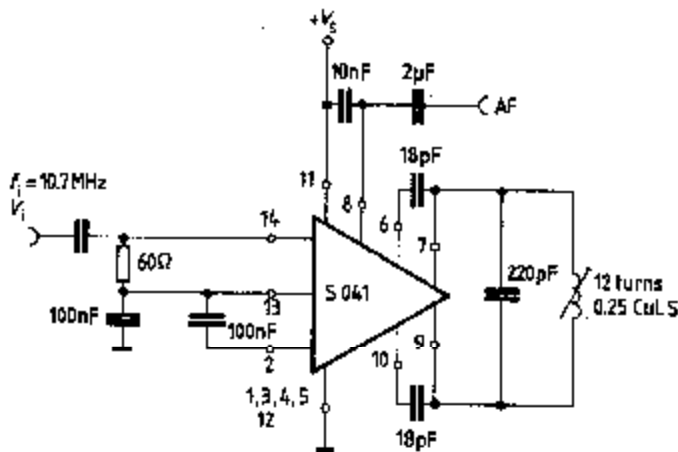




**Application circuit for 10.7 MHz (FM IF)  
and 455 kHz (narrow-band FM)**

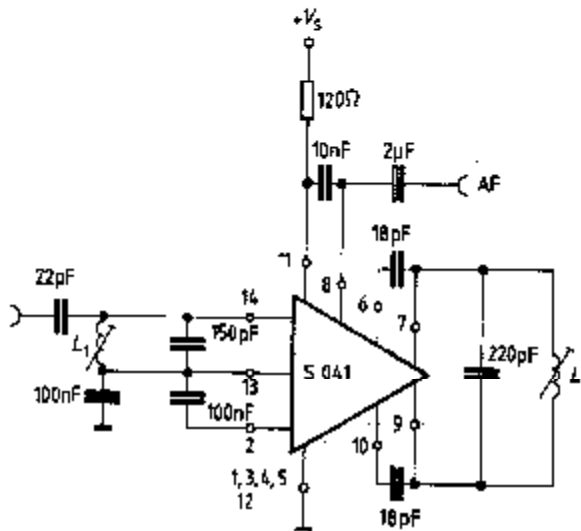

Data in parentheses for 455kHz (narrow-band FM)


Coils	10.7 MHz	455 kHz
$L_1$	15 turns/0.15 CuLS	71.5 turns/12 x 0.04 CuLS
$L_2$	12 turns/0.25 CuLS	71.5 turns/12 x 0.04 CuLS
Coil set	D 41-2165	D 41-2393 of Messrs. Vagt

**Current consumption versus supply voltage**

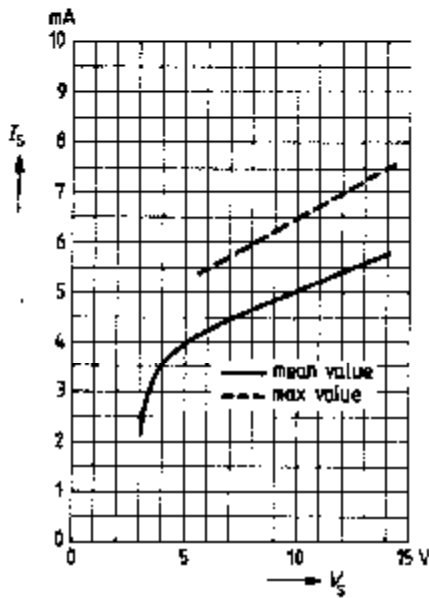


**AF output voltage and total harmonic distortion versus supply voltage**

$f_1 = 10.7 \text{ MHz}$ ;  $\Delta f = \pm 50 \text{ kHz}$   
 $f_{\text{mod}} = 1 \text{ kHz}$ ;  $Q$  approx. 35

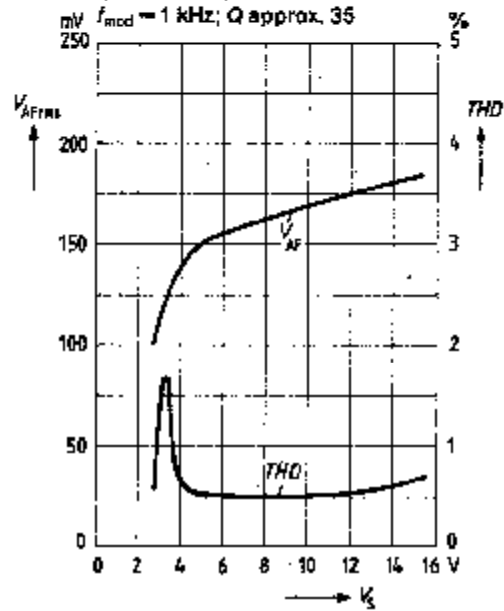


**DC output voltage difference versus supply voltage (without signal)**

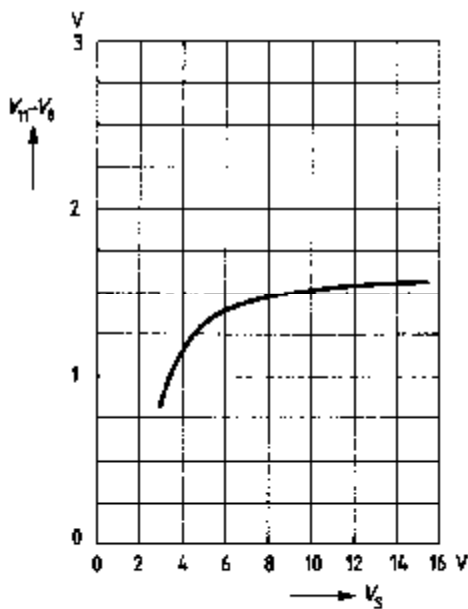


**Input voltage for limiting versus supply voltage**

$f_1 = 10.7 \text{ MHz}$ ;  $\Delta f = \pm 50 \text{ kHz}$   
 $f_{\text{mod}} = 1 \text{ kHz}$ ;  $Q$  approx. 35

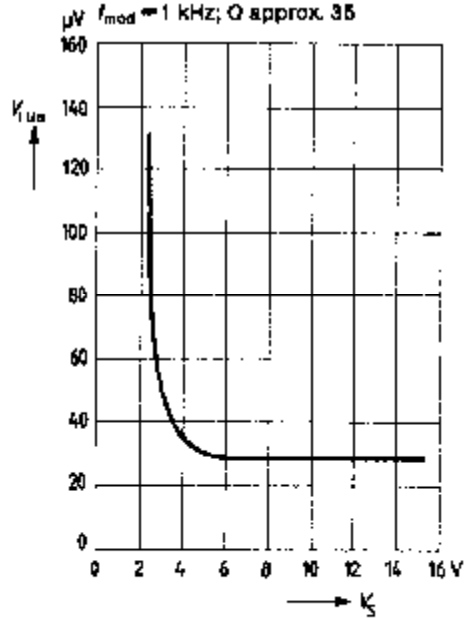

AM suppression versus  
supply voltage  
 $f_i = 10.7 \text{ MHz}$ ;  $\Delta f = \pm 50 \text{ kHz}$ ;  
 $V_i = 10 \text{ mV}$ ,  $f_{mod} = 1 \text{ kHz}$ ,  $m = 30\%$

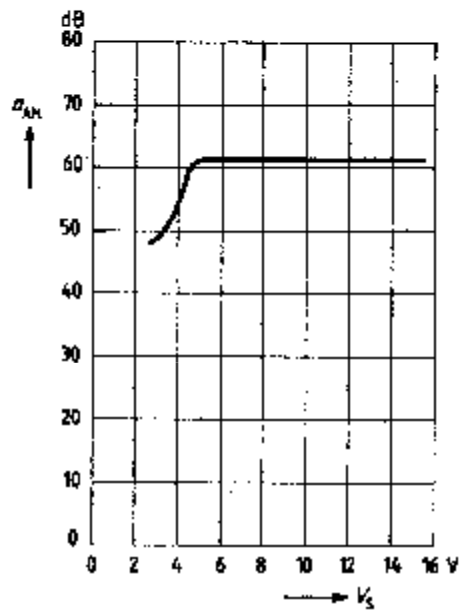

AF output voltage and total  
harmonic distortion versus Q-factor  
 $V_s = 12 \text{ V}$ ;  $f_i = 10.7 \text{ MHz}$ ;  
 $\Delta f = \pm 50 \text{ kHz}$ ,  $f_{mod} = 1 \text{ kHz}$

