


## Wiring Changes for the new Centurion (MV-3-C) display

Please observe the wiring changes below when exchanging the old C4-3 Centurion display with the new MV-3-C display:

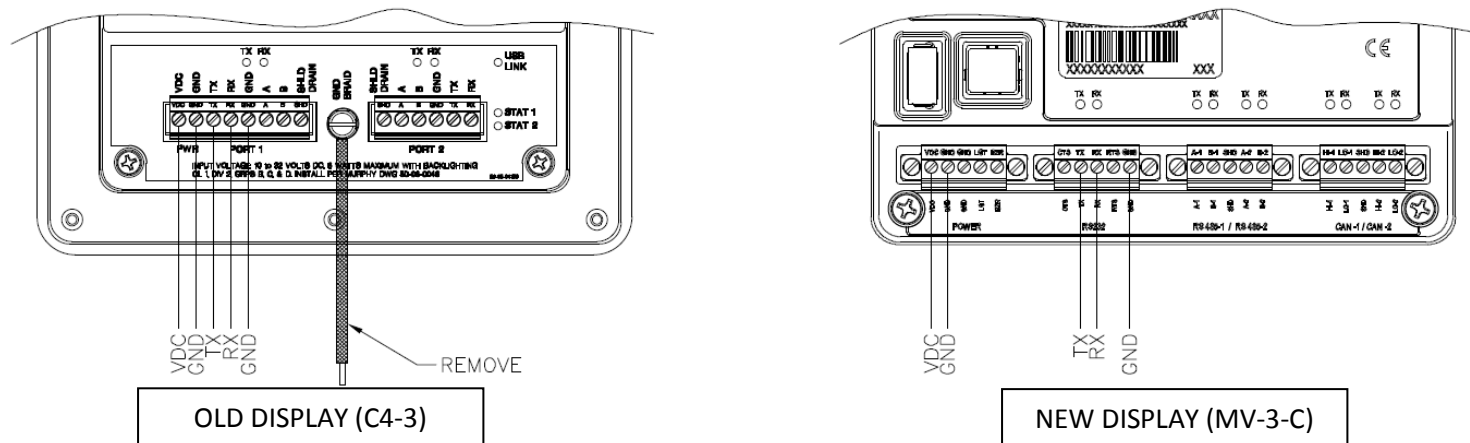

1. The wiring ports are isolated in the new display, and the connectors are held by screws. Please observe the name printed for each terminal. Example: VDC, GND, TX, RX, etc.
2. For your convenience, a screwdriver is provided with the new display to work on the terminal block screws.
3. VDC and GND for PWR terminals on PORT 1 of the old display should be connected to VDC and GND of POWER port on the new display.
4. TX, RX, GND from PORT 1 of the old display is wired to TX, RX, GND on RS232 port of the new display.
5. If you have a braided GND wire on the old display, it is no longer needed on the new display. It can be safely terminated.
6. Recycle power and the new display should start to sync with the controller.

In case of technical issues or product troubleshooting, please contact technical support or your respective sales channel.