
TOSHIBA Transistor Silicon PNP Epitaxial Type (PCT Process)

## RN2101F,RN2102F,RN2103F RN2104F,RN2105F,RN2106F


Switching, Inverter Circuit, Interface Circuit And Driver Circuit Applications

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process
- Complementary to RN1101F~RN1106F

### **Equivalent Circuit and Bias Resister Values**



Type No.	R1 (kΩ)	R2 (kΩ)
RN2101F	4.7	4.7
RN2102F	10	10
RN2103F	22	22
RN2104F	47	47
RN2105F	2.2	47
RN2106F	4.7	47

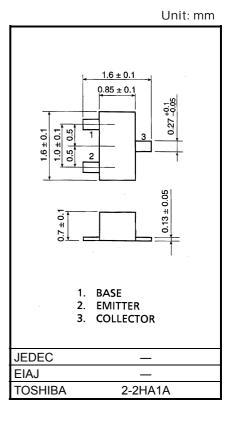

#### **Maximum Ratings (Ta = 25°C)**


Characteristic		Symbol	Rating	Unit	
Collector-base voltage	RN2101F~2106F	V <sub>CBO</sub>	-50	V	
Collector-emitter voltage	1(1021011 - 21001	$V_{CEO}$	-50	V	
Emitter-base voltage	RN2101F~2104F	V <sub>EBO</sub>	-10	V	
	RN2105F, 2106F	vEBO.	-5		
Collector current		IC	-100	mA	
Collector power dissipation	RN2101F~2106F	PC	100	mW	
Junction temperature	NINZ 10 17~2 100F	Tj	150	°C	
Storage temperature range		T <sub>stg</sub>	-55~150	°C	





# Electrical Characteristics (Ta = 25°C)


Characteris	stic	Symbol	Test Circuit	Test Condition	Min	Тур.	Max	Unit
Collector cut-off current	RN2101F	I <sub>CBO</sub>		$V_{CB} = -50V, I_E = 0$	_	_	-100	nA
	~2106F	I <sub>CEO</sub>		$V_{CE} = -50V, I_B = 0$	_	_	-500	
- · · · · · · · · · · · · · · · · · · ·	RN2101F	I <sub>EBO</sub>		V <sub>EB</sub> = -10V, I <sub>C</sub> = 0	-0.82	_	-1.52	mA
	RN2102F				-0.38	_	-0.71	
	RN2103F				-0.17	_	-0.33	
Emitter cut-off current	RN2104F		_		-0.082	_	-0.15	
	RN2105F				-0.078	_	-0.145	
	RN2106F			$V_{EB} = -5V, I_C = 0$	-0.074	_	-0.138	
	RN2101F				30	_	_	
	RN2102F				50	_	_	
DC current gain	RN2103F	h		V <sub>CE</sub> = −5V,	70	_	_	
DC current gain	RN2104F	h <sub>FE</sub>	_	I <sub>C</sub> = -10mA	80	_	_	
	RN2105F				80	_	_	
	RN2106F				80	_	_	
Collector-emitter saturation voltage	RN2101F ~2106F	V <sub>CE</sub> (sat)	_	$I_{C} = -5mA,$ $I_{B} = -0.25mA$	_	-0.1	-0.3	٧
	RN2101F			V <sub>CF</sub> = -0.2V,	-1.1	_	-2.0	
Input voltage (ON)	RN2102F	V <sub>I (ON)</sub> —			-1.2	_	-2.4	
	RN2103F				-1.3	_	-3.0	
	RN2104F		$V_{CE} = -0.2V$ , $I_{C} = -5$ mA	-1.5	_	-5.0	V	
	RN2105F			-0.6	_	-1.1		
	RN2106F				-0.7	_	-1.3	
Input voltage (OFF)	RN2101F ~2104F	V		V <sub>CE</sub> = -5V, I <sub>C</sub> = -0.1mA	-1.0	_	-1.5	V
	RN2105F, 2106F	V <sub>I</sub> (OFF)			-0.5	_	-0.8	
Transition frequency	RN2101F ~2106F	f <sub>T</sub>	_	V <sub>CE</sub> = -10V, I <sub>C</sub> = -5mA	_	200	_	MHz
Collector Output capacitance	RN2101F ~2106F	C <sub>ob</sub>	_	V <sub>CB</sub> = -10V, I <sub>E</sub> = 0, f = 1MHz	_	3	6	pF
Input resistor	RN2101F			_	3.29	4.7	6.11	- kΩ
	RN2102F				7	10	13	
	RN2103F	R1 —			15.4	22	28.6	
	RN2104F				32.9	47	61.1	
	RN2105F				1.54	2.2	2.86	
	RN2106F				3.29	4.7	6.11	
Resistor ratio	RN2101F ~2104F				0.9	1.0	1.1	
	RN2105F	R1/R2	_		0.0421	0.0468	0.0515	
	RN2106F				0.09	0.1	0.11	


2



















3


















































6

Type Name	Marking
RN2101F	Type Name Y A
RN2102F	Type Name Y B
RN2103F	Type Name Y C
RN2104F	Type Name Y D
RN2105F	Type Name Y E
RN2106F	Type Name Y F

#### **RESTRICTIONS ON PRODUCT USE**

000707EAA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
  In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The information contained herein is presented only as a guide for the applications of our products. No
  responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other
  rights of the third parties which may result from its use. No license is granted by implication or otherwise under
  any intellectual property or other rights of TOSHIBA CORPORATION or others.

8

• The information contained herein is subject to change without notice.