

5G American Standard, Glass Tube, Quick Blow 5 x 20 Glass Quick Acting Fuse

Functional Characteristics

Testing current	B low Time	
	Min	Max
100%	4 hours	/
135%	/	1hour
200%	/	5s

Breaking Capacity

10,000 amperes at 125V AC (250mA-12A)

35 amperes at 250V AC (0-1A)

100 amperes at 250V AC (1.1A-3.5A)


200 amperes at 250V AC (3.6A-10A)

Material


Fuse body –glass tube

End cap--nickel plated brass

Pigtall--tin plated copper on nicket plated brass cap

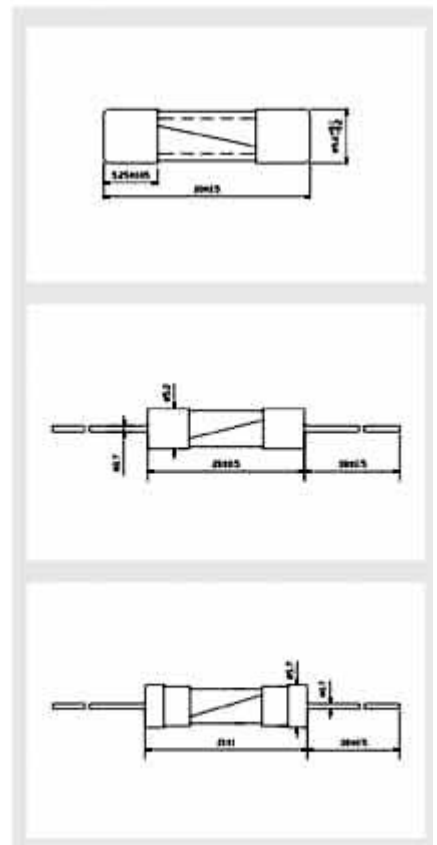

Approvals

Current Rating	Voltage Rating	Approvals
		
250mA	125V/250V	
300mA	125V/250V	
350mA	125V/250V	
400mA	125V/250V	
500mA	125V/250V	
750mA	125V/250V	
1A	125V/250V	
1.25A	125V/250V	
1.5A	125V/250V	
1.6A	125V/250V	
2A	125V/250V	
2.5A	125V/250V	
3A	125V/250V	
3.5A	125V	
4A	125V	
5A	125V	
6A	125V	