

Industrial Batteries / Network Power

Classic Solar

»Powerful energy storage for renewable energy systems«



Classic OPzS Solar

Energy storage for outstanding power applications

The Classic OPzS Solar range has been well proven for decades in medium and large power applications. Due to their robustness, long design life and high operational safety they are ideally suitable for use in solar and wind power stations, telecommunications, power distribution companies, railways and many other safety equipment power supplies. The wide range of available capacities and sizes provides a solution for every power need, even in harsh environments.

Your benefits:

- > **Optimised design for renewable energy applications** – highest cycling ability and long life
- > **Special alloy and large electrolyte reserve** – very long topping up intervals
- > **Low maintenance** – saving costs
- > **Completely recyclable** – low CO₂ footprint



Specifications:

- > Nominal capacity (C₁₂₀ at 25 °C): 70.0 - 4600 Ah
- > Very thick tubular positive plates for the most demanding applications
- > Up to 2800 cycles at 60 % depth of discharge (C₁₀) with IU charging profile at 20 °C.
For enhanced performance and for systems ≥ 48 V we recommend IUI charging to reach 3000 cycles and more.
- > Designed in accordance with IEC 61427 and IEC 60896-11
- > Screw connectors for a better contact and reliability
- > Also available in dry-charged version with separate electrolyte
- > High quality transparent containers for easy maintenance




Nominal capacity
70.0 – 4600 Ah



Block battery/
Single cell



Tubular plate



up to 3000*+
cycles at
60 % depth
of discharge



Recyclable



Low
maintenance

*Using IUI charging at 20 °C

Classic OPzS Solar

Technical data

Technical characteristics and data

| Type | Part number | Nom. voltage V | Nominal capacity C ₁₂₀ 1.85 Vpc 25 °C Ah | Length (l) max. mm | Width (b/w) max. mm | Height* (h) max. mm | Installed length (L) max. mm | Weight incl. acid approx. kg | Weight acid** approx. kg | Internal resistance mOhm | Short circuit current A | Terminal | Pole pairs |
|-----------------|-----------------|-------------------|--|--------------------------|---------------------------|---------------------------|------------------------------------|---------------------------------|-----------------------------|-----------------------------|----------------------------|----------|------------|
| OPzS Solar 190 | NVSL020190WC0FA | 2 | 190 | 105 | 208 | 395 | 115 | 13.7 | 5.20 | 1.45 | 1400 | F-M8 | 1 |
| OPzS Solar 245 | NVSL020245WC0FA | 2 | 245 | 105 | 208 | 395 | 115 | 15.2 | 5.00 | 1.05 | 1950 | F-M8 | 1 |
| OPzS Solar 305 | NVSL020305WC0FA | 2 | 305 | 105 | 208 | 395 | 115 | 16.6 | 4.60 | 0.83 | 2450 | F-M8 | 1 |
| OPzS Solar 380 | NVSL020380WC0FA | 2 | 380 | 126 | 208 | 395 | 136 | 20.0 | 5.80 | 0.72 | 2850 | F-M8 | 1 |
| OPzS Solar 450 | NVSL020450WC0FA | 2 | 450 | 147 | 208 | 395 | 157 | 23.3 | 6.90 | 0.63 | 3250 | F-M8 | 1 |
| OPzS Solar 550 | NVSL020550WC0FA | 2 | 550 | 126 | 208 | 511 | 136 | 26.7 | 8.10 | 0.63 | 3250 | F-M8 | 1 |
| OPzS Solar 660 | NVSL020660WC0FA | 2 | 660 | 147 | 208 | 511 | 157 | 31.0 | 9.30 | 0.56 | 3650 | F-M8 | 1 |
| OPzS Solar 765 | NVSL020765WC0FA | 2 | 765 | 168 | 208 | 511 | 178 | 35.4 | 10.8 | 0.50 | 4100 | F-M8 | 1 |
| OPzS Solar 985 | NVSL020985WC0FA | 2 | 985 | 147 | 208 | 686 | 157 | 43.9 | 13.0 | 0.47 | 4350 | F-M8 | 1 |
| OPzS Solar 1080 | NVSL021080WC0FA | 2 | 1080 | 147 | 208 | 686 | 157 | 47.2 | 12.8 | 0.43 | 4800 | F-M8 | 1 |
| OPzS Solar 1320 | NVSL021320WC0FA | 2 | 1320 | 212 | 193 | 686 | 222 | 59.9 | 17.1 | 0.30 | 6800 | F-M8 | 2 |
| OPzS Solar 1410 | NVSL021410WC0FA | 2 | 1410 | 212 | 193 | 686 | 222 | 63.4 | 16.8 | 0.27 | 7500 | F-M8 | 2 |
| OPzS Solar 1650 | NVSL021650WC0FA | 2 | 1650 | 212 | 235 | 686 | 222 | 73.2 | 21.7 | 0.26 | 7900 | F-M8 | 2 |
| OPzS Solar 1990 | NVSL021990WC0FA | 2 | 1990 | 212 | 277 | 686 | 222 | 86.4 | 26.1 | 0.23 | 8900 | F-M8 | 2 |
| OPzS Solar 2350 | NVSL022350WC0FA | 2 | 2350 | 212 | 277 | 836 | 222 | 108 | 33.7 | 0.24 | 8500 | F-M8 | 2 |
| OPzS Solar 2500 | NVSL022500WC0FA | 2 | 2500 | 212 | 277 | 836 | 222 | 114 | 32.7 | 0.22 | 9300 | F-M8 | 2 |
| OPzS Solar 3100 | NVSL023100WC0FA | 2 | 3100 | 215 | 400 | 812 | 225 | 151 | 50.0 | 0.16 | 12800 | F-M8 | 3 |
| OPzS Solar 3350 | NVSL023350WC0FA | 2 | 3350 | 215 | 400 | 812 | 225 | 158 | 48.0 | 0.14 | 14600 | F-M8 | 3 |
| OPzS Solar 3850 | NVSL023850WC0FA | 2 | 3850 | 215 | 490 | 812 | 225 | 184 | 60.0 | 0.12 | 17000 | F-M8 | 4 |
| OPzS Solar 4100 | NVSL024100WC0FA | 2 | 4100 | 215 | 490 | 812 | 225 | 191 | 58.0 | 0.11 | 17800 | F-M8 | 4 |
| OPzS Solar 4600 | NVSL024600WC0FA | 2 | 4600 | 215 | 580 | 812 | 225 | 217 | 71.0 | 0.11 | 18600 | F-M8 | 4 |
| OPzS Solar 280 | NVSL060280WC0FA | 6 | 294 | 273 | 204 | 358 | 283 | 41.0 | 13.0 | 2.68 | 2283 | F-M8 | 1 |
| OPzS Solar 350 | NVSL060350WC0FA | 6 | 364 | 381 | 204 | 358 | 391 | 56.0 | 20.0 | 2.39 | 2800 | F-M8 | 1 |
| OPzS Solar 420 | NVSL060420WC0FA | 6 | 417 | 381 | 204 | 358 | 391 | 63.0 | 20.0 | 1.96 | 3106 | F-M8 | 1 |
| OPzS Solar 70 | NVSL120070WC0FA | 12 | 82.7 | 273 | 204 | 358 | 283 | 35.0 | 15.0 | 18.1 | 688 | F-M8 | 1 |
| OPzS Solar 140 | NVSL120140WC0FA | 12 | 139 | 273 | 204 | 358 | 283 | 45.0 | 14.0 | 9.26 | 1314 | F-M8 | 1 |
| OPzS Solar 210 | NVSL120210WC0FA | 12 | 210 | 381 | 204 | 358 | 391 | 64.0 | 19.0 | 6.46 | 1884 | F-M8 | 1 |


| Type | C ₆ 1.75 Vpc | C ₁₀ 1.80 Vpc | C ₁₂ 1.80 Vpc | C ₂₄ 1.80 Vpc | C ₄₈ 1.80 Vpc | C ₇₂ 1.80 Vpc | C ₁₀₀ 1.85 Vpc | C ₁₂₀ 1.85 Vpc | C ₂₄₀ 1.85 Vpc |
|-----------------|-------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|---------------------------------|---------------------------------|---------------------------------|
| OPzS Solar 190 | 122 | 132 | 134 | 145 | 165 | 175 | 185 | 190 | 200 |
| OPzS Solar 245 | 159 | 173 | 176 | 190 | 215 | 230 | 240 | 245 | 260 |
| OPzS Solar 305 | 203 | 220 | 224 | 240 | 270 | 285 | 300 | 305 | 320 |
| OPzS Solar 380 | 250 | 273 | 277 | 300 | 330 | 350 | 370 | 380 | 400 |
| OPzS Solar 450 | 296 | 325 | 330 | 355 | 395 | 420 | 440 | 450 | 470 |
| OPzS Solar 550 | 353 | 391 | 398 | 430 | 480 | 515 | 540 | 550 | 580 |
| OPzS Solar 660 | 422 | 469 | 477 | 515 | 575 | 615 | 645 | 660 | 695 |
| OPzS Solar 765 | 492 | 546 | 555 | 600 | 670 | 710 | 750 | 765 | 805 |
| OPzS Solar 985 | 606 | 700 | 710 | 770 | 860 | 920 | 970 | 985 | 1035 |
| OPzS Solar 1080 | 669 | 773 | 784 | 845 | 940 | 1000 | 1055 | 1080 | 1100 |
| OPzS Solar 1320 | 820 | 937 | 950 | 1030 | 1150 | 1230 | 1295 | 1320 | 1385 |
| OPzS Solar 1410 | 888 | 1009 | 1024 | 1105 | 1225 | 1305 | 1380 | 1410 | 1440 |
| OPzS Solar 1650 | 1024 | 1174 | 1190 | 1290 | 1440 | 1540 | 1620 | 1650 | 1730 |
| OPzS Solar 1990 | 1218 | 1411 | 1430 | 1550 | 1730 | 1850 | 1950 | 1990 | 2090 |
| OPzS Solar 2350 | 1573 | 1751 | 1770 | 1910 | 2090 | 2200 | 2300 | 2350 | 2470 |
| OPzS Solar 2500 | 1667 | 1854 | 1875 | 2015 | 2215 | 2335 | 2445 | 2500 | 2600 |
| OPzS Solar 3100 | 2080 | 2318 | 2343 | 2520 | 2755 | 2910 | 3040 | 3100 | 3250 |
| OPzS Solar 3350 | 2268 | 2524 | 2550 | 2740 | 2985 | 3135 | 3280 | 3350 | 3520 |
| OPzS Solar 3850 | 2592 | 2884 | 2915 | 3135 | 3430 | 3615 | 3765 | 3850 | 4040 |
| OPzS Solar 4100 | 2775 | 3090 | 3125 | 3355 | 3650 | 3840 | 4000 | 4100 | 4300 |
| OPzS Solar 4600 | 3099 | 3451 | 3490 | 3765 | 4100 | 4300 | 4500 | 4600 | 4850 |
| OPzS Solar 280 | 203 | 206 | 229 | 250 | 296 | 304 | 287 | 294 | 338 |
| OPzS Solar 350 | 245 | 257 | 284 | 311 | 374 | 383 | 355 | 364 | 424 |
| OPzS Solar 420 | 284 | 309 | 322 | 354 | 420 | 432 | 408 | 417 | 482 |
| OPzS Solar 70 | 55.0 | 51.5 | 63.7 | 69.4 | 78.4 | 79.8 | 81.0 | 82.7 | 92.9 |
| OPzS Solar 140 | 95.4 | 103 | 108 | 118 | 141 | 145 | 136 | 139 | 162 |
| OPzS Solar 210 | 131 | 154 | 162 | 177 | 206 | 217 | 203 | 210 | 234 |

Capacities in Ah (C₆ – C₂₄₀ at 25 °C)

* Includes installed connector, the above mentioned height can differ depending on the used vent(s).

** Acid density d_N = 1.24 kg/l

Terminal and torque



12 Nm for blocks;
20 Nm for cells


Data is also valid for dry charged version.
Change »W« (Wet) to »D« (Dry) in the part number.
E.g.:

> filled and charged: NVSL120070 **W** COFA
> dry charged: NVSL120070 **D** COFA


Classic OPzS Solar Drawings

Drawings with terminal position


6 V Blocks

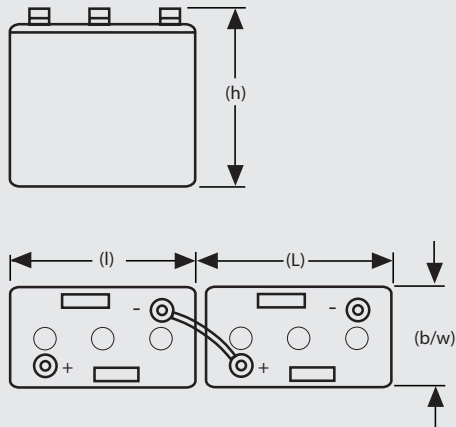


12 V Blocks

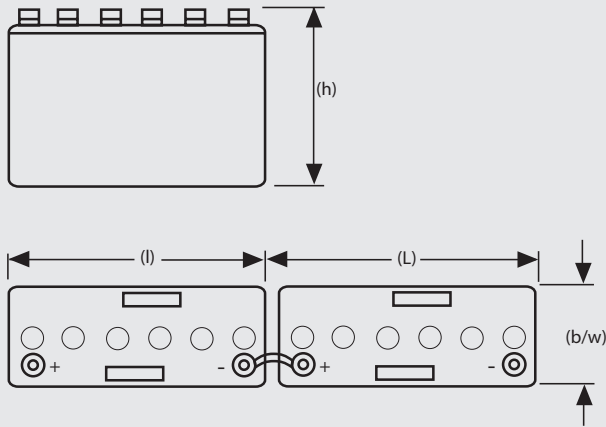


OPzS Solar 190 – OPzS Solar 1080

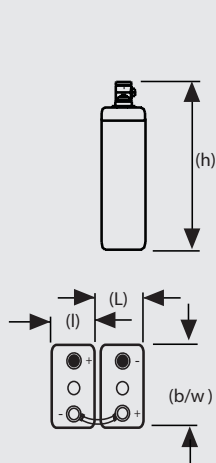


OPzS Solar 1320 – OPzS Solar 2500

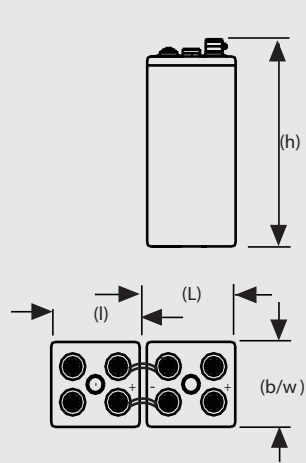

OPzS Solar 3100 – OPzS Solar 3350

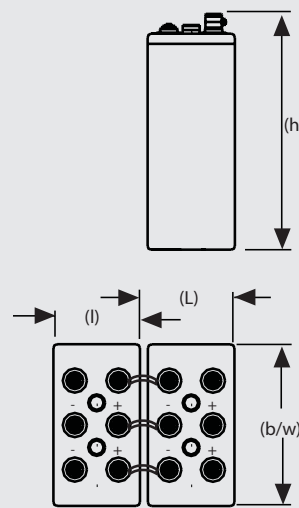

OPzS Solar 3850 – OPzS Solar 4600

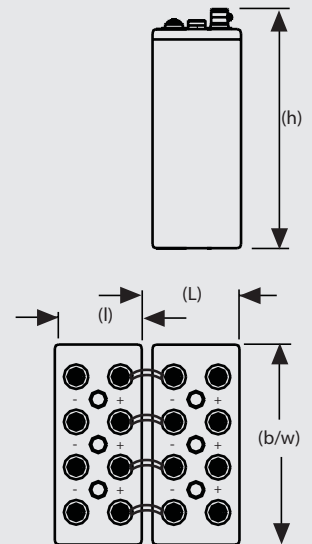

Not to scale!

Classic EnerSol T

Powerful and universal, suitable for every application

Classic EnerSol T batteries are universal, low maintenance energy supplies for medium industrial solar systems. These lead acid batteries with liquid electrolyte are renowned for being safe and reliable due to their high performance. Typical applications are small solar and wind power systems, holiday and weekend houses.

Your benefits:

- > **Positive tubular plates** – extremely robust design and enhanced cycling performance
- > **Low maintenance** – saving costs
- > **Completely recyclable** – low CO₂ footprint



Specifications:

- > Nominal capacity (C₁₂₀ at 25 °C): 376 - 1282 Ah
- > Containers made from translucent plastics for easy topping up
- > Screw connectors for a better contact and reliability
- > Also available in dry-charged version with separate electrolyte

| | | | | | |
|-----------------------------------|-------------|---------------|---|------------|-----------------|
| | | | | | |
| Nominal capacity 376 – 1282 Ah | Single cell | Tubular plate | up to 1500 cycles acc. to IEC 60896-11 (60 % DoD) | Recyclable | Low maintenance |

Classic EnerSol T

Technical data, Drawings

Technical characteristics and data

| Type | Part number | Nom. voltage V | Nominal capacity C_{120} 1.85 Vpc 25 °C Ah | Length (l) max. mm | Width (b/w) max. mm | Height* (h) max. mm | Installed length (L) max. mm | Weight incl. acid approx. kg | Weight acid** approx. kg | Internal resistance mOhm | Short circuit current A | Terminal | Pole pairs |
|----------------|-----------------|-------------------|---|-----------------------|------------------------|------------------------|---------------------------------|---------------------------------|-----------------------------|-----------------------------|----------------------------|----------|------------|
| EnerSol T 370 | NVTS020370WC0FA | 2 | 376 | 83.0 | 199 | 445 | 93.0 | 17.3 | 5.10 | 0.70 | 2900 | F-M10 | 1 |
| EnerSol T 460 | NVTS020460WC0FA | 2 | 452 | 101 | 199 | 445 | 111 | 21.0 | 6.30 | 0.56 | 3625 | F-M10 | 1 |
| EnerSol T 550 | NVTS020550WC0FA | 2 | 542 | 119 | 199 | 445 | 129 | 24.7 | 7.50 | 0.46 | 4350 | F-M10 | 1 |
| EnerSol T 650 | NVTS020650WC0FA | 2 | 668 | 119 | 199 | 508 | 129 | 29.5 | 8.60 | 0.45 | 4500 | F-M10 | 1 |
| EnerSol T 760 | NVTS020760WC0FA | 2 | 779 | 137 | 199 | 508 | 147 | 31.0 | 10.0 | 0.38 | 5250 | F-M10 | 1 |
| EnerSol T 880 | NVTS020880WC0FA | 2 | 897 | 137 | 199 | 556 | 147 | 38.0 | 11.0 | 0.43 | 4660 | F-M10 | 1 |
| EnerSol T 1000 | NVTS021000WC0FA | 2 | 1025 | 155 | 199 | 556 | 165 | 43.1 | 12.6 | 0.38 | 5325 | F-M10 | 1 |
| EnerSol T 1130 | NVTS021130WC0FA | 2 | 1154 | 173 | 199 | 556 | 183 | 47.7 | 14.1 | 0.34 | 5991 | F-M10 | 1 |
| EnerSol T 1250 | NVTS021250WC0FA | 2 | 1282 | 191 | 199 | 556 | 201 | 52.8 | 15.6 | 0.30 | 6657 | F-M10 | 1 |


* The above mentioned height can differ depending on the used vent(s).

**Acid density d_{40} = 1.26 kg/l

| Type | C_{6} 1.75 V/C | C_{10} 1.80 V/C | C_{12} 1.80 V/C | C_{24} 1.80 V/C | C_{48} 1.80 V/C | C_{72} 1.80 V/C | C_{100} 1.85 V/C | C_{120} 1.85 V/C | C_{240} 1.85 V/C |
|----------------|------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|--------------------------|--------------------------|--------------------------|
| EnerSol T 370 | 260 | 280 | 294 | 333 | 361 | 368 | 369 | 376 | 383 |
| EnerSol T 460 | 327 | 350 | 367 | 416 | 437 | 460 | 444 | 452 | 478 |
| EnerSol T 550 | 393 | 425 | 441 | 499 | 524 | 553 | 533 | 542 | 574 |
| EnerSol T 650 | 492 | 527 | 552 | 625 | 656 | 668 | 647 | 668 | 719 |
| EnerSol T 760 | 574 | 615 | 645 | 729 | 766 | 780 | 755 | 779 | 839 |
| EnerSol T 880 | 654 | 714 | 742 | 840 | 854 | 953 | 869 | 897 | 966 |
| EnerSol T 1000 | 755 | 809 | 848 | 960 | 1008 | 1089 | 993 | 1025 | 1104 |
| EnerSol T 1130 | 850 | 910 | 954 | 1080 | 1134 | 1225 | 1117 | 1154 | 1242 |
| EnerSol T 1250 | 944 | 1011 | 1060 | 1200 | 1260 | 1361 | 1241 | 1282 | 1380 |


The capacities are given in Ah at 25 °C after 5 cycles.

Terminal and torque



25 Nm

Drawings with terminal position

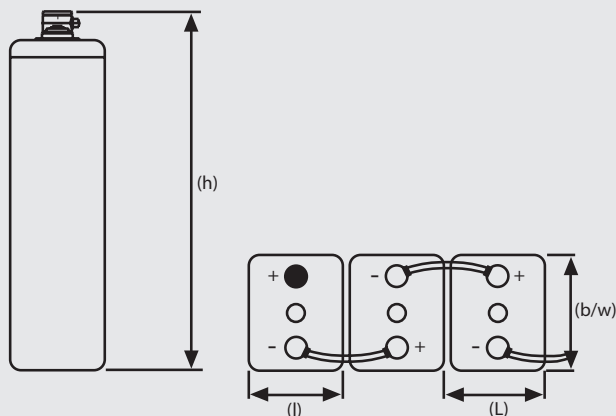

Not to scale!

Classic EnerSol

Cost-effective energy storage

Classic EnerSol are robust flooded batteries for energy storage that is proven for use in leisure and consumer applications (SHS).

Your benefits:

- > **Thick grid plates** – excellent resistance to corrosion
- > **Low maintenance** – saving costs
- > **Completely recyclable** – low CO₂ footprint



Specifications:

- > Longer design life in cyclic applications in comparison to a standard automotive battery
- > Improved DC voltage, due to short intercell connections
- > Internal pocket separators consisting of micro porous glass mat to ensure cell characteristics are retained over full life of the cell
- > Terminal adapters can be provided
- > Also available in dry-charged version with separate electrolyte




Nominal capacity
53.0 – 256 Ah



Block battery



Grid plate



Longer Design Life*



Recyclable



Low maintenance

* In cyclic applications in comparison to a standard automotive battery.

Classic EnerSol

Technical data, Drawings


Technical characteristics and data

| Type | Part number | Nom. voltage V | Capacity C_{100} 1.85 Vpc 25 °C Ah | Nominal capacity C_{120} 1.85 Vpc 25 °C Ah | Discharge current I_{120} 1.85 Vpc A | Length (l) max. mm | Width (b/w) max. mm | Hight (h) max. mm | Weight incl. acid approx. kg | Weight acid* approx. kg | Terminal | Terminal position |
|-------------|-----------------|-------------------|---|---|---|-----------------------|------------------------|----------------------|---------------------------------|----------------------------|------------|-------------------|
| EnerSol 50 | NVCE120050WC0TA | 12 | 52.0 | 53.0 | 0.44 | 210 | 175 | 190 | 13.7 | 2.10 | A-Terminal | 1 |
| EnerSol 65 | NVCE120065WC0TA | 12 | 65.0 | 66.0 | 0.55 | 242 | 175 | 190 | 17.3 | 2.70 | A-Terminal | 1 |
| EnerSol 80 | NVCE120080WC0TA | 12 | 78.0 | 80 | 0.66 | 278 | 175 | 190 | 20.7 | 4.70 | A-Terminal | 1 |
| EnerSol 100 | NVCE120100WC0TA | 12 | 97.0 | 99.0 | 0.82 | 353 | 175 | 190 | 26.4 | 7.00 | A-Terminal | 1 |
| EnerSol 130 | NVCE120130WC0TA | 12 | 130 | 132 | 1.10 | 349 | 175 | 290 | 33.0 | 10.9 | A-Terminal | 1 |
| EnerSol 175 | NVCE120175WC0TA | 12 | 175 | 179 | 1.49 | 513 | 223 | 223 | 47.8 | 14.6 | A-Terminal | 2 |
| EnerSol 250 | NVCE120250WC0TA | 12 | 250 | 256 | 2.13 | 518 | 276 | 242 | 63.0 | 18.6 | A-Terminal | 2 |

* Acid density d_{40} = 1.28 kg/l

Terminal and torque

Don't use torque for adapter.






Data is also valid for dry charged version.

Change »W« (Wet) to »D« (Dry) in the part number. E.g.:

> filled and charged: NVCE120050 **W** C0TA

> dry charged: NVCE120050 **D** C0TA



Drawings with terminal position

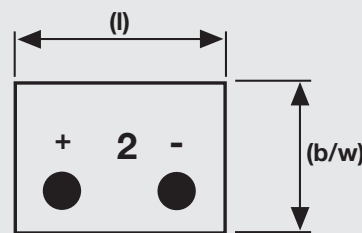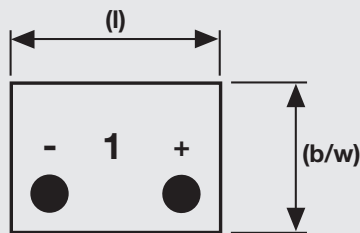

Accessories

EnerSol adapter negative

EnerSol adapter positive

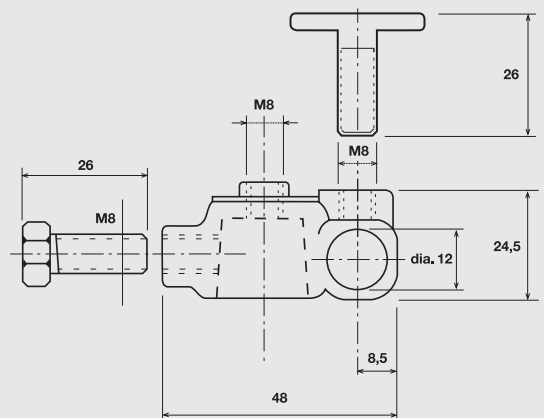

Not to scale!



ABSOLYTE™

Classic™

drysafe

Element

LIBERATOR

MARATHON™

Powerfit™

Sonnenschein®

Sprinter®

TENSOR™

Exide Technologies, with operations in more than **80 countries**, is one of the world's largest producers and recyclers of lead-acid batteries. Exide Technologies provides a comprehensive and customized range of stored electrical energy solutions. Based on **over 100 years of experience** in the development of innovative technologies, Exide Technologies is an esteemed partner of OEMs and serves the spare parts market for industrial and transportation applications.

GNB® INDUSTRIAL POWER – A division of Exide Technologies – offers an **extensive range of storage products and services**, including solutions for telecommunication systems, railway applications, mining, photovoltaic (solar energy), uninterrupted power supply (UPS), electrical power generation and distribution, fork lifts and electric vehicles.

Exide Technologies takes pride in its commitment to a better **environment**. Its Total Battery Management programme, (an integrated approach to manufacturing, distributing and recycling of lead-acid batteries), has been developed to ensure a safe and responsible life cycle for all of its products.

EXIDE Distributionscenter Berlin
ELEKTRO.TEC GmbH
 Eichborndamm 129-139
 D-13403 Berlin

Tel.: 030/4111024
 Fax: 030/4111025

www.elektrotec-berlin.de



info@elektrotec-berlin.de



»The **next Level** of
Energy Management«

GNB® INDUSTRIAL POWER provides long lasting energy concepts that combine efficiency with flexibility.