
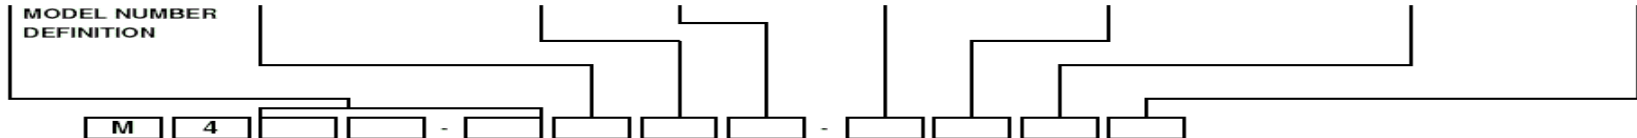


SX Series 6" Frame, 6 Pole, AC (BLDC) Servo Motors
Explosion Proof (Hazardous Location)

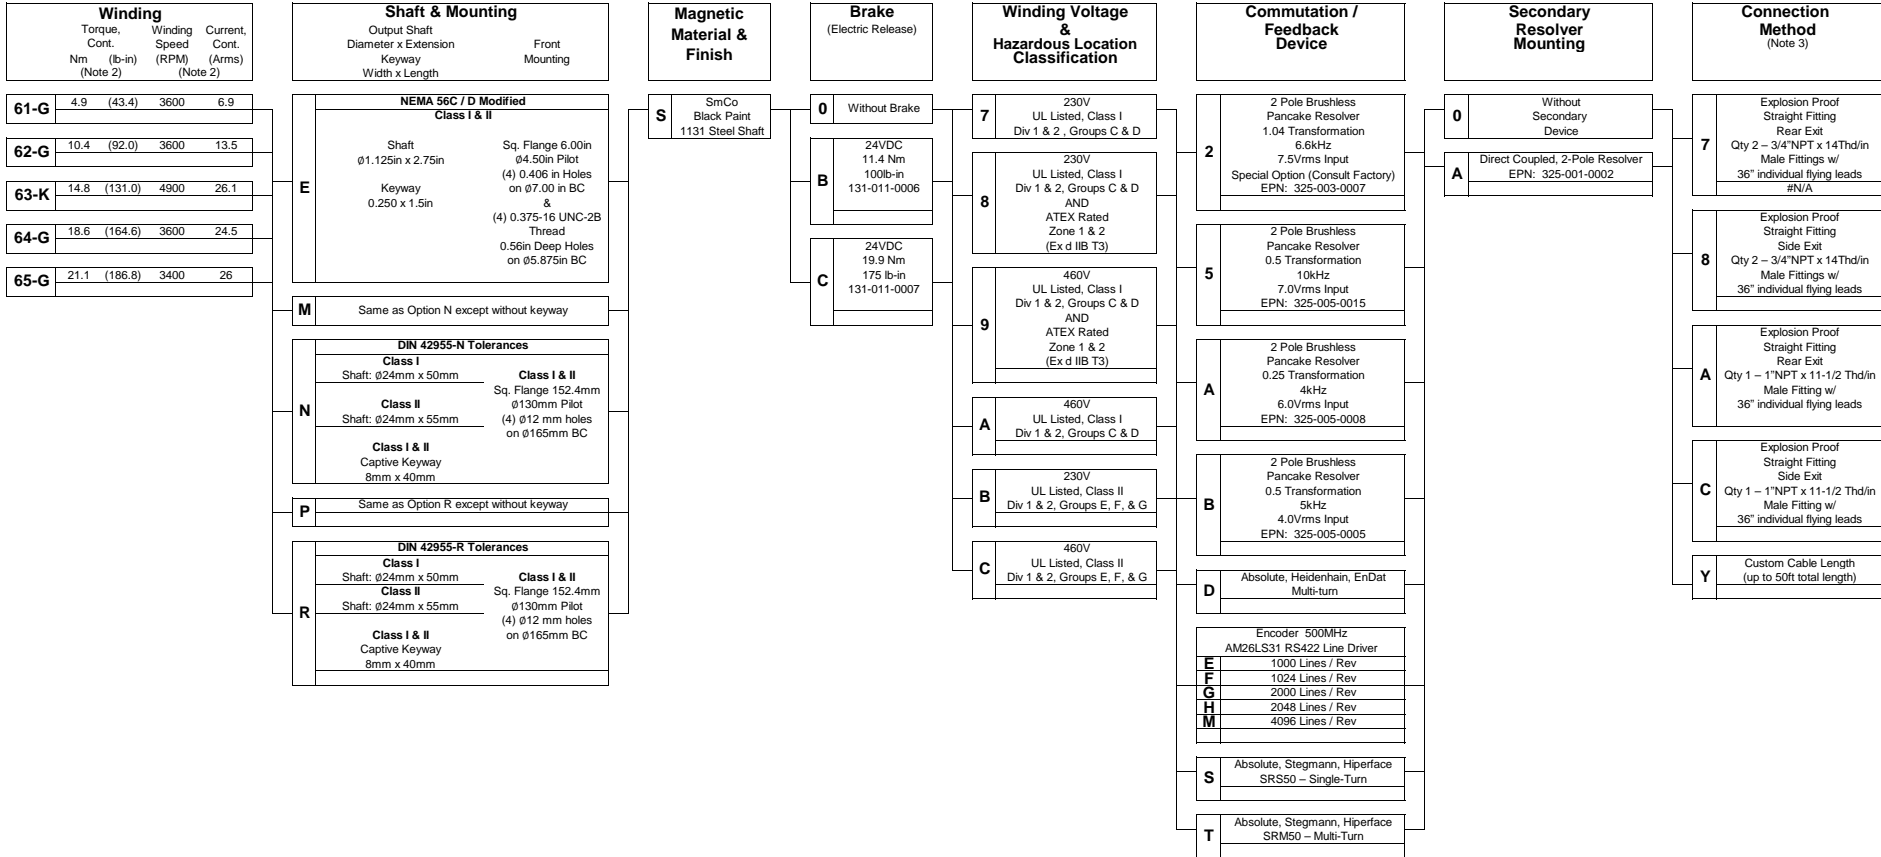

- Notes:**
1. Thermo switch rating 180degC in motor, each winding (3), normally closed contact.
 2. Derate the motor continuous torque by 6% and use 1/2 the listed current for 460V winding motors.
 3. M46x Connectors: Screw on connectors are not available on Explosion Proof motors.
 4. Class II motors have longer shaft extensions to accommodate the dust slinger.

Replaces all previous pricing sheets.
 All data & prices are subject to change without notice.
 Rev. F (04/30/2015) EDN: 051656
 ECO: 007753 EPN: 307-660-0103C
 (997-002-56811)