
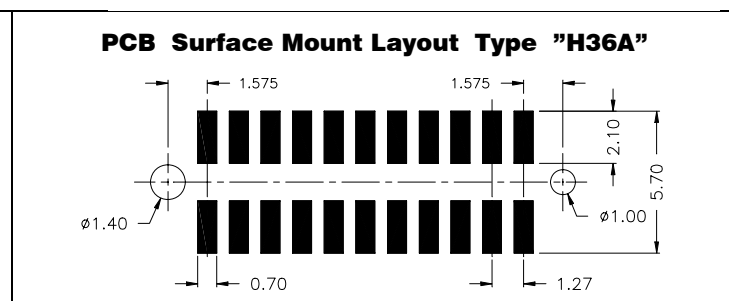
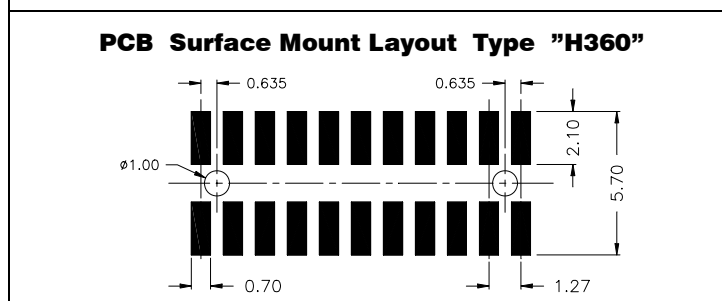


1.27mm pitch Female Header

- SMT - dual row 3.60mm profile

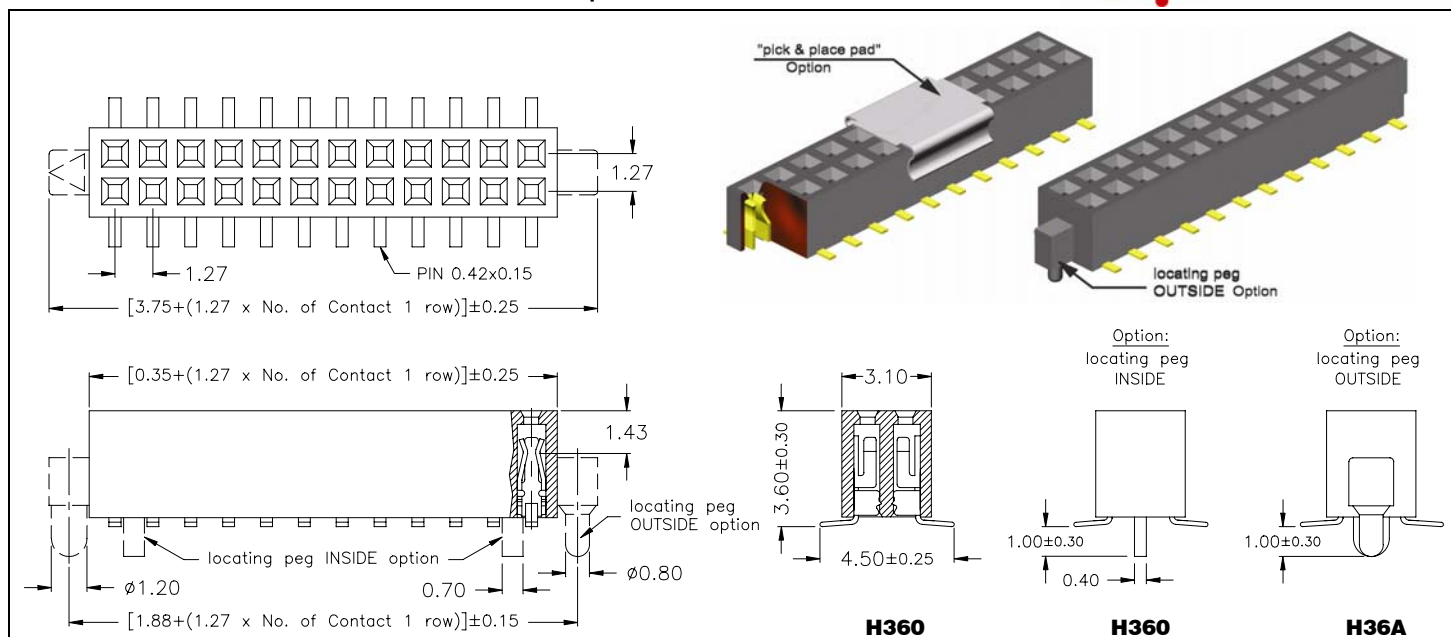

APPLICATION AND FEATURES

- **Standard: tube packing without locating pegs**
- Also available with "pick & place pad" for automatic suck assembly to the PCB
- Low profile, 3.60mm height Type. Hi-rel dual beam contacts.
- Mating with 1.27mm x 1.27mm pitch, 0.40mm square or round pin headers.

SPECIFICATIONS

| | | | |
|---------------------------------|--------------|------------------------|---|
| Current rating | 1 A | Operating temperature | - 40°C to +105°C |
| Insulator resistance | 5000 MΩ min. | Processing temperature | +250°C +0/-5°C for 10sec. |
| Contact resistance | 20 mΩ max. | Contact material | (RoHS compliant) Phosphor Bronze |
| Dielectric withstanding voltage | 500 V AC | Insulator material | (RoHS compliant) Nylon or LCP UL 94 V-0 |

How to order

BS2 - xxx - H xxx - 55 / 11 XX

| Nbr of contacts |
|-----------------|
| 006 to 100 |

| Type |
|---|
| 360 = without & with inside locating pegs |
| 36A = with outside locating pegs |

| Option |
|---------------------------------------|
| for "pick up" and "packing" see below |

Order Code Options:

without "locating pegs"

| | | |
|---------------------|---|---------------------------------|
| BS2-xxx-H360-55/11 | = | w/o pick up pad & tube packing |
| BS2-xxx-H360-55/11A | = | with pick up pad & tube packing |
| BS2-xxx-H360-55/11B | = | with pick up pad & reel packing |

with "locating pegs"

| | | |
|---------------------|---|---------------------------------|
| BS2-xxx-H360-55/11C | = | w/o pick up pad & tube packing |
| BS2-xxx-H360-55/11D | = | with pick up pad & tube packing |
| BS2-xxx-H36A-55/11D | = | with pick up pad & tube packing |
| BS2-xxx-H360-55/11E | = | with pick up pad & reel packing |
| BS2-xxx-H36A-55/11E | = | with pick up pad & reel packing |