


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	06/13/03	S.C.
B	UPDATED NOTED	10/12/05	H.N.
C	UPDATED DRAWING	01/25/10	JAG


SKT1769

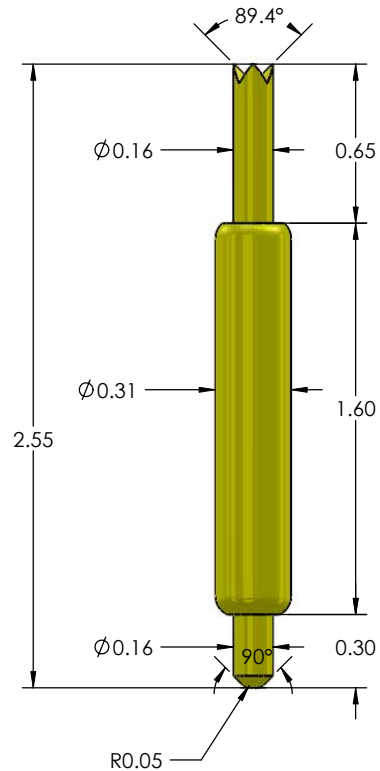

Spring force
 3.8 g at initial travel
 18.0g at 0.45mm recommended travel
 22.0g at 0.6mm full travel

Material & Finish
 Plunger [Top]: Hardened Beryllium copper / Gold Plated
 Plunger [Bottom] :Hardened Beryllium copper / Gold Plated
 Barrel: Phosphor Bronze / Gold Plated
 Spring: Stainless Steel / Gold Plated

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE:
 IN INCHES (MILLIMETERS)
 TOLERANCES ARE:
 X ± 0.100MM ANGLES:
 XX ± 0.050MM XX° ± 1.0°
 XXX ± 0.025MM XXX° ± 0.5°

		Emulation Technology, Inc. — VLSI and SMT ADAPTERS and ACCESSORIES —	
		759 Flynn Road Camarillo, Ca 93012	TEL:(805)383-8480 FAX:(805)383-8484
SHEET: 1 OF 1	DATE: 10/12/05	REVISION: C	ASSEMBLY DRAWING
CHECKED: PERRY MUNROE	DRAWN: HUY NGUYEN	ITEM: POGO-PIN-2.55-1	
Scale N/A DO NOT SCALE DRAWING		DESCRIPTION: POGO-PIN-2.55-1	