
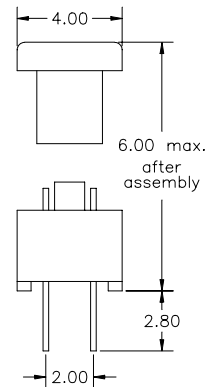
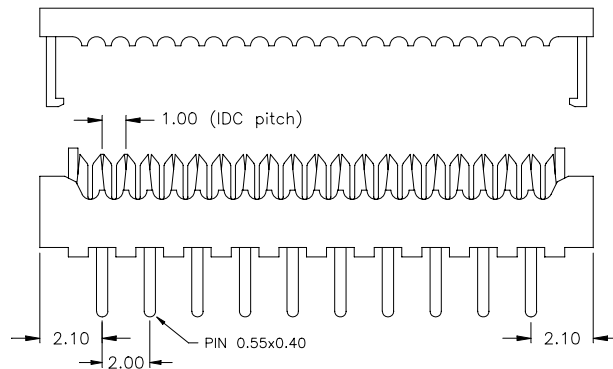


IDC – DIP Plug 2,00mm x 2,00mm


IDC pitch 1,00mm

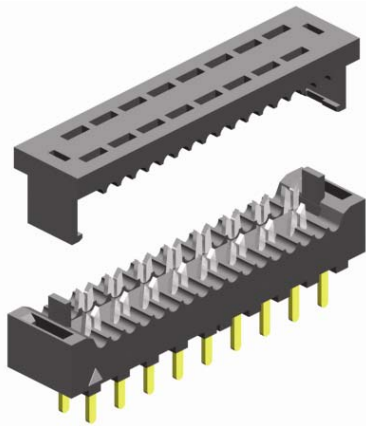

APPLICATION AND FEATURES

- A perfect solution for attaching a 1,00mm pitch flat ribbon cable to a PC-board
- Low-profile, only 6,00mm above board
- Designed for plug into socket or direct soldering to a PC-board

P. C. B. Hole Layout

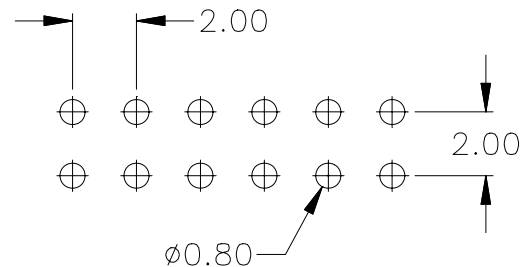

SPECIFICATIONS

Current rating	1 A	Operating temperature	- 40° to +105°C
Insulator resistance	5000 MΩ min.	Contact material (RoHS compliant)	Phosphor Bronze
Contact resistance	20 mΩ max.	Plating	Nickel; Gold on mating area
Dielectric withstanding	AC 500 V	Insulator material (RoHS compliant)	P.B.T. UL 94 V-0

How to order

IDP - xxx - S 200 - N5

Nbr of contacts

**006; 008; 010; 012; 014
016; 020; 022; 024; 026
030; 034; 040; 044; 050
060; 068**

Plating

N5
Ni on IDC area / Au on mating area