

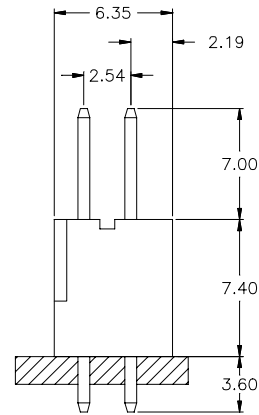


# 2.54mm Pin Header - high plastic base

- dual row -


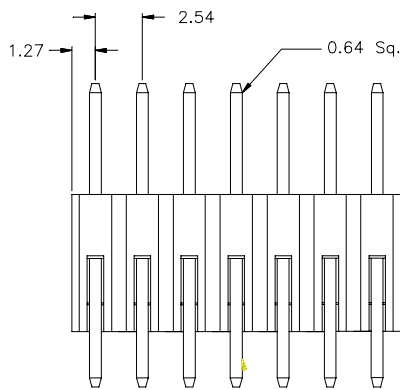


Straight type - 7.40mm body



**S 740**

Right angle type - 6.35mm body

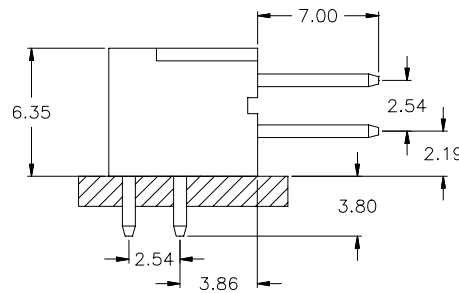


**R 635**

### Specifications

Current rating	3 A
Insulator resistance	5000 MΩ min.
Contact resistance	20 mΩ max.
Dielectric withstanding voltage	AC 500 V
Operating temperature	- 40° to +105°C
Contact material	Brass
Insulator material	P.B.T. UL 94 V-0

### PCB Hole layout

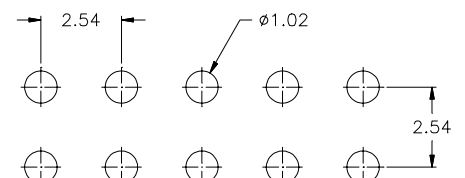

### How to order

**SE 2 - xxx - X xxx - 55**

<b>Nbr of contacts</b>	<b>Version</b>		<b>Style</b>		<b>Plating</b>
<b>020 to 060</b>	<b>S</b> = Straight	<b>740</b> = 7.40mm	<b>R</b> = Right Angle	<b>635</b> = 6.35mm	<b>55</b> = gold others on request