


1.27mm x 2.54mm Board Spacer


- SMT - dual row

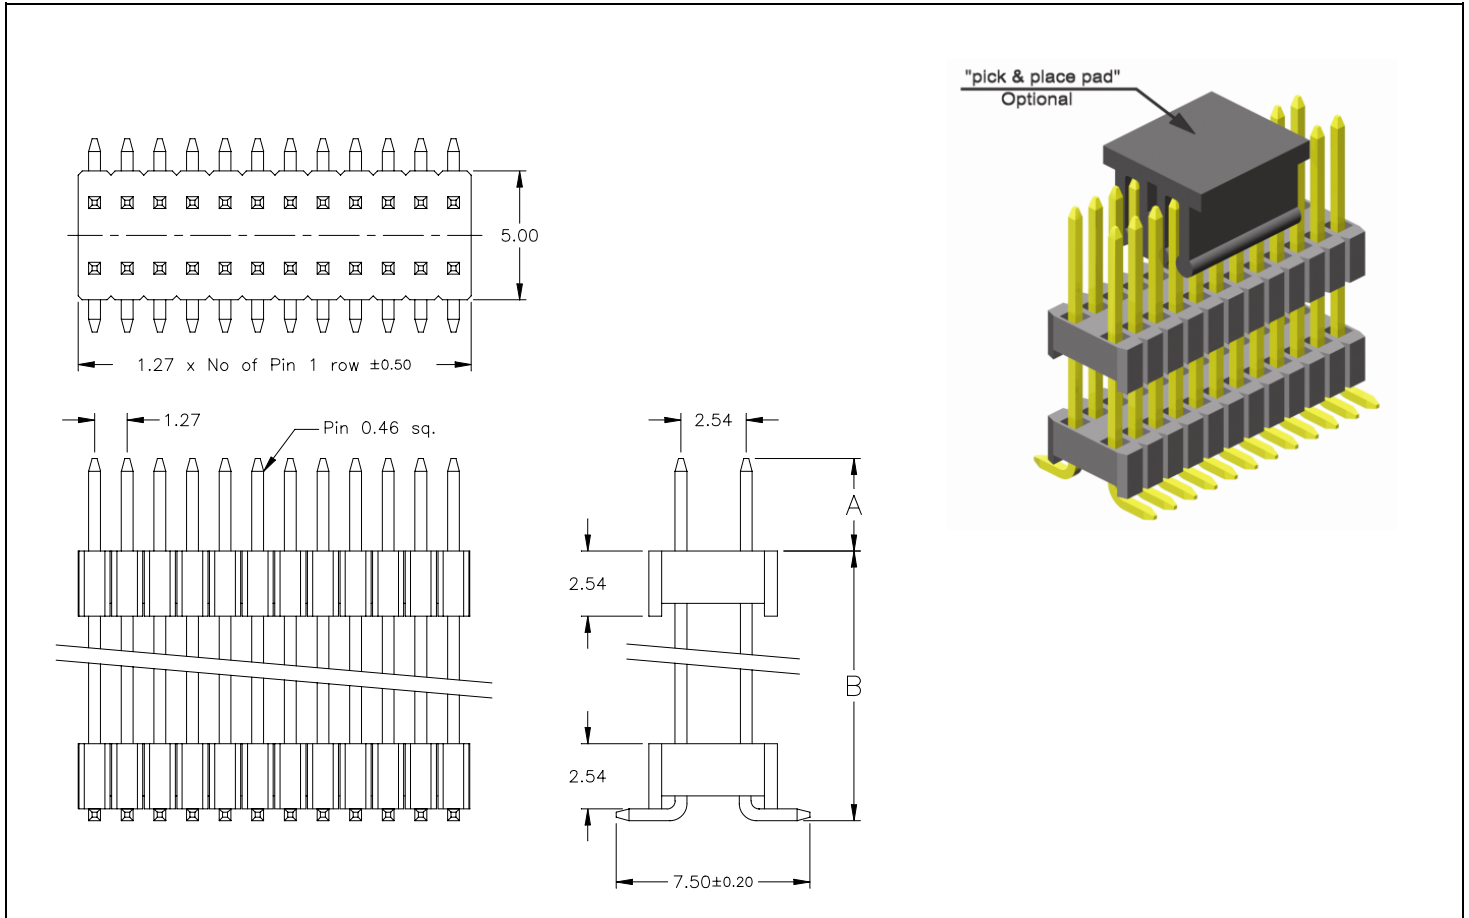

SPECIFICATIONS

Current rating	1 A
Insulator resistance	5000 M Ω min.
Contact resistance	20 m Ω max.
Dielectric withstanding voltage	500 V AC
Operating temperature	- 40° to +105°C
Processing temperature	+250°C $\pm 0/-5^\circ\text{C}$ for 5sec.
Contact material (RoHS compliant)	Brass
Insulator material (RoHS compliant)	Nylon UL 94 V-0

PCB Surface Mount Layout

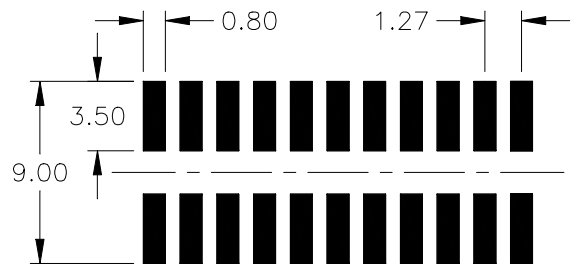

How to order

SP2 - xxx - H 220/x - 55 /1 X

Nbr of contacts
006 to 100

Terminal style		
Code	DIM "A"	DIM "B"
220/0	5.60mm	8.50mm
220/1	5.60mm	9.75mm
220/2	3.40mm	12.20mm
Other dimensions on request		

Plating
55 = gold
Other platings on request

Packing and "pick & place pad" Option (standard tube packing)	
A	= tube packing and pick & place pad
B	= reel packing and pick & place pad