




EMULATION TECHNOLOGY, INC.

INSTALLING INSTRUCTIONS BGA ScrewLock Sockets

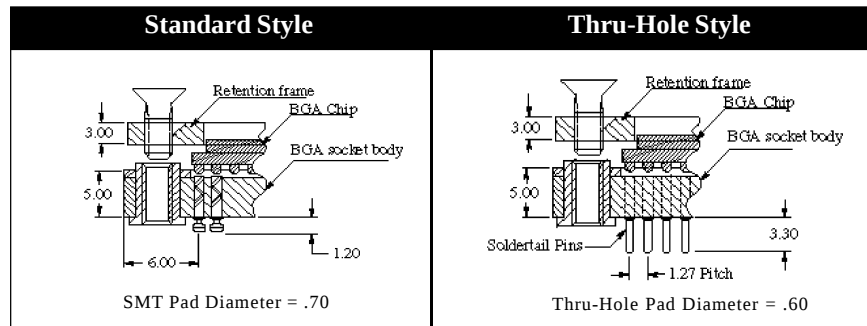

All Dimensions in Millimeters

Step One:

The recommended reflow temperature profile can be found on our website:

www.emulation.com/pdf/bgalga_soldering_profile.pdf

Step Two:

To avoid socket damage once the chip has been inserted in the socket use the following procedure to tighten the screws.

- 1) Insert and screw down each screw **without** tightening firmly.
- 2) Perform final tightening of each screw using ET's Torque Screw Driver preset at 7cn per meter or 10oz per inch.

The ET Part Number for the Torque Screw Driver is:

ET-TORQ-7CN

Purchase Online at:

WWW.1800ADAPTER.COM

or call: **1-800-ADAPTER (232-7837)**

Call or See our website to view our Full Line Catalog and unlimited application consulting.




● 2344 Walsh Avenue, Building F ●
Santa Clara, CA 95051

EMULATION TECHNOLOGY, INC.



EMULATION TECHNOLOGY, INC.

INSTALLING INSTRUCTIONS BGA ScrewLock Sockets

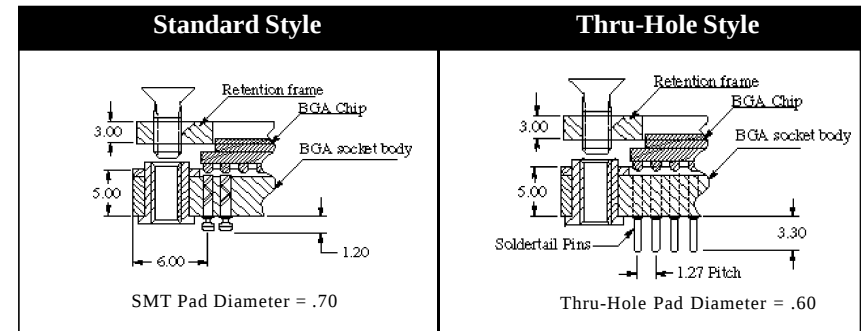

All Dimensions in Millimeters

Step One:

The recommended reflow temperature profile can be found on our website:

www.emulation.com/pdf/bgalga_soldering_profile.pdf

Step Two:

To avoid socket damage once the chip has been inserted in the socket use the following procedure to tighten the screws.

- 1) Insert and screw down each screw **without** tightening firmly.
- 2) Perform final tightening of each screw using ET's Torque Screw Driver preset at 7cn per meter or 10oz per inch.

The ET Part Number for the Torque Screw Driver is:

ET-TORQ-7CN

Purchase Online at:

WWW.1800ADAPTER.COM

or call: **1-800-ADAPTER (232-7837)**

Call or See our website to view our Full Line Catalog and unlimited application consulting.



● 2344 Walsh Avenue, Building F ●
Santa Clara, CA 95051

EMULATION TECHNOLOGY, INC.