

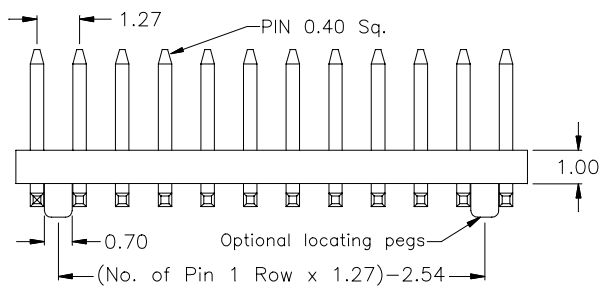
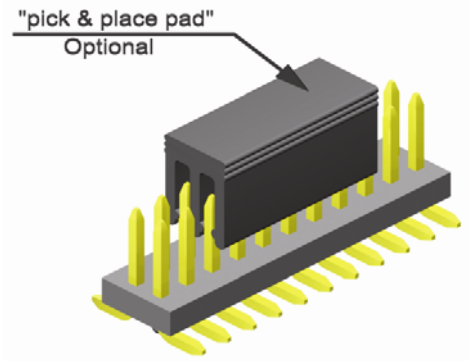



1.27mm pitch Pin Header
- SMT - low profile dual row

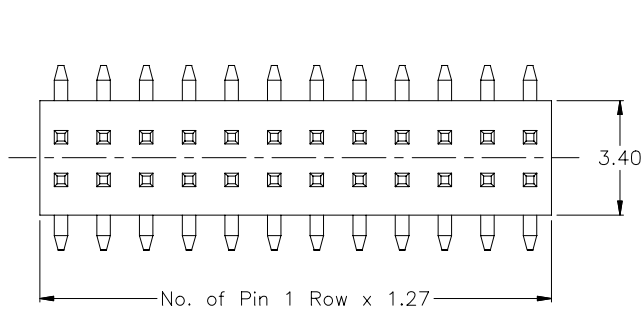

APPLICATION AND FEATURES

- **Standard: tube packing and without "locating pegs"**
- Assures reliable PC Board connections
- Low profile insulator
- Mates with 1,27mm pitch Female Headers

PCB Surface Mount Layout

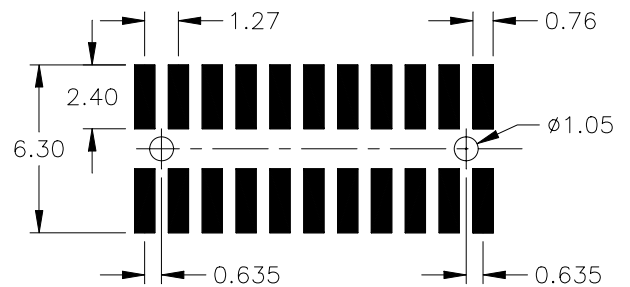

SPECIFICATIONS

Current rating	1 A
Insulator resistance	5000 MΩ min.
Contact resistance	20 mΩ max.
Dielectric withstanding voltage	500 V AC

Operating temperature	- 40° to +105°C
Processing temperature	+250°C +0/-5°C for 20sec.
Contact material	(RoHS compliant) Copper alloy
Insulator material	(RoHS compliant) Nylon UL 94 V-0

How to order

SS2 - xxx - H xx/x - 55 /11 X

Nbr of contacts	Terminal style	DIM "A"	Plating	Packing and "pick & place pad" Option
without locating pegs: 006 to 100	70/0	3.00mm	55 = gold	without "locating pegs" A = tube packing and pick & place pad B = reel packing and pick & place pad
with locating pegs: 008 to 100	70/1	10.00mm	Other platings on request	
	70/2	6.50mm		with "locating pegs" (available only from 008 to 100 contacts) C = locating pegs and tube packing D = locating pegs; tube packing; pick & place pad E = locating pegs; reel packing; pick & place pad
	Other dimensions on request			