




2.00mm pitch Pin Header - slanted -  
- SMT - single and dual row




"pick & place pad"  
Optional

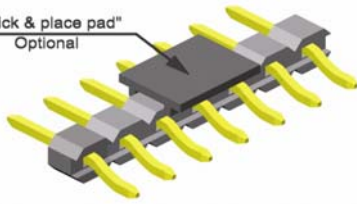

"pick & place pad"  
Optional

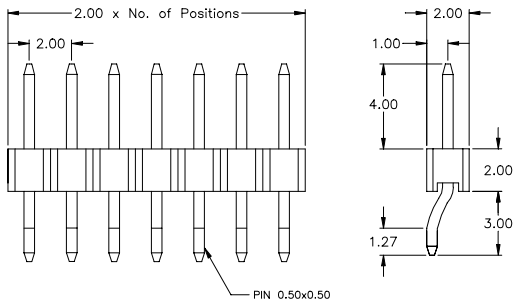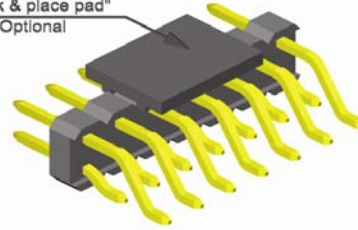


093/0 Type

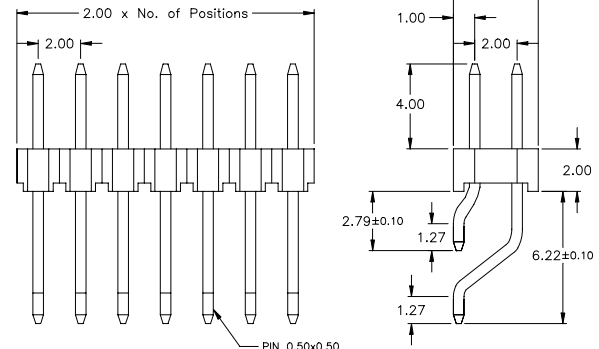


122/0 Type

**PCB SMD Layout single row**

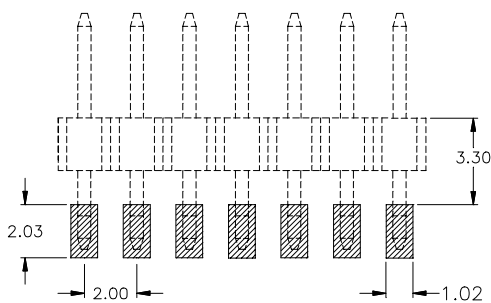

**PCB SMD Layout dual row**

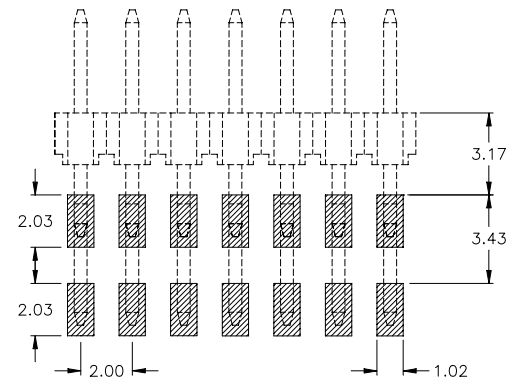

**SPECIFICATIONS**

Current rating 1 A  
Insulator resistance 5000 MΩ min.  
Contact resistance 20 mΩ max.  
Dielectric withstanding AC 500 V

Operating temperature -40°C to +105°C  
Processing temperature +250°C +0/-5°C for 20sec.  
Contact material (RoHS compliant) Copper alloy  
Insulator material (RoHS compliant) Nylon UL 94 V-0

**How to order**

SR x - xxx - H xxx/x - 55 /2 X

Rows	Nbr of contacts	Type	Plating	Packing and "pick & place pad" Option
single row = 1	002 to 040	093 / 0	55 = gold	A = tube packing and pick & place pad
dual row = 2	004 to 080	122 / 0	other platings on request	B = reel packing and pick & place pad