
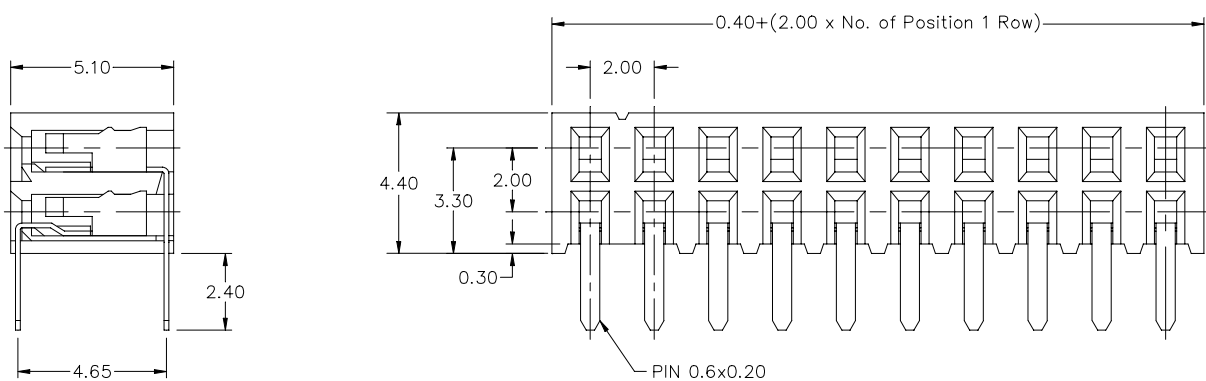
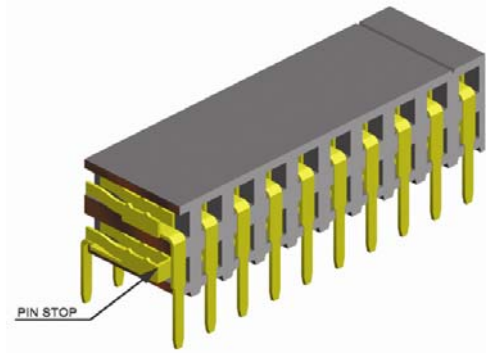



2.00mm pitch Female Header
 - THT - side entry type

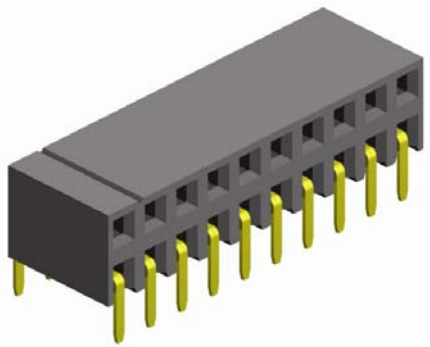

APPLICATION AND FEATURES

- Hi-rel dual beam contact assures reliable PC-Board connections
- Accepts 0.50mm square pins
- 4.40mm height above board
- Stand-off's facilitate post solder cleaning

PCB Hole Layout

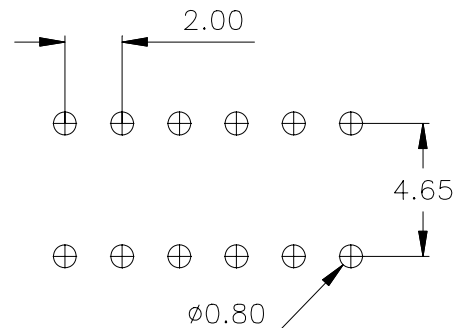

SPECIFICATIONS

Current rating	1 A	Operating temperature	- 40° to +105°C
Insulator resistance	5000 MΩ min.	Processing temperature	+250°C +0/-5°C for 20sec.
Contact resistance	20 mΩ max.	Contact material	Phosphor bronze (RoHS compliant)
Dielectric withstanding	AC 500 V	Insulator material	Nylon UL 94 V-0 (RoHS compliant)

How to order

BH 2 - xxx - R 450 - 55 /2

Nbr of contacts
004 to 050

Plating
55 = gold
others on request