


APPLICATION AND FEATURES

- **Standard: tray packing and without "pick & place pad"**
- Also available "reel" packing
- Mating devices for female headers, solder tail and IDC Type
- Reliable flat cable to PCB connection
- No ejector latches for space saving

P C B Surface Mount Layout

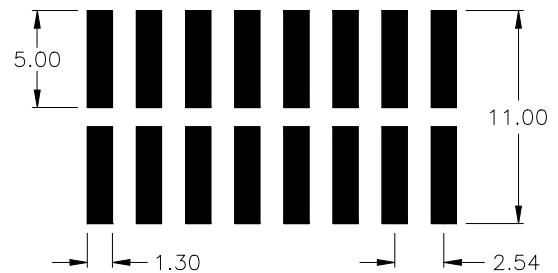

SPECIFICATIONS

Current rating	3 A
Insulator resistance	5000 MΩ min.
Contact resistance	20 mΩ max.
Dielectric withstanding	500 V AC

Operating temperature	- 40° to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material (RoHS compliant)	Brass
Insulator material (RoHS compliant)	Nylon UL 94 V-0

How to order

SLS - xxx - H 885 - 55 / X

Nbr of contacts
006; 008; 010; 012
014; 016; 020; 024
026; 030; 034; 040
044; 050

Plating
55 = gold
other platings on request

Option
F = tray packing and pick & place pad
B = reel packing and pick & place pad