


1.00mm pitch Board Spacer


- SMT - dual row

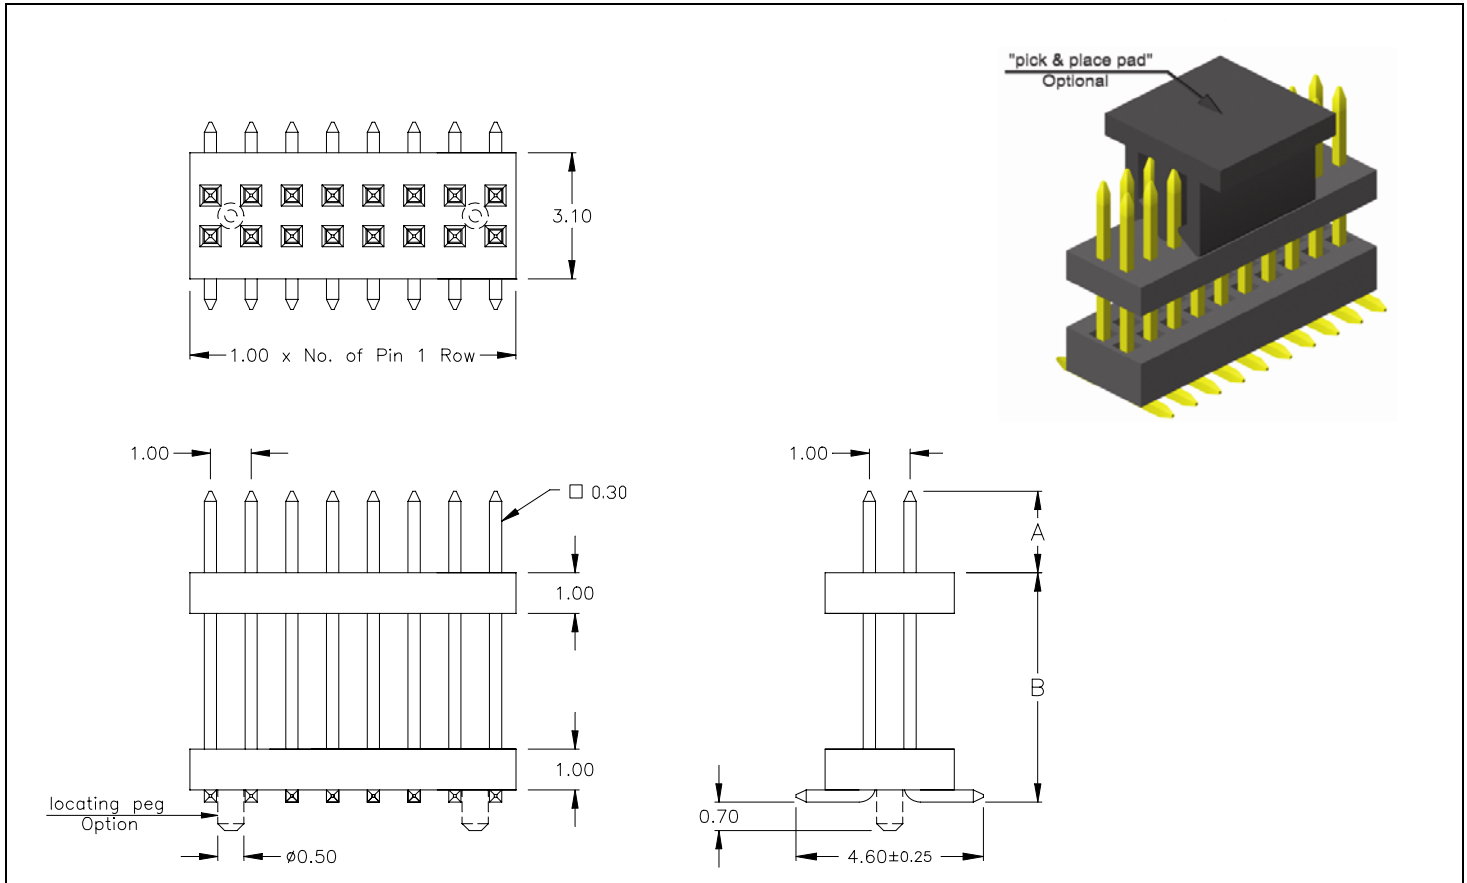

SPECIFICATIONS

Current rating	1 A
Insulator resistance	5000 MΩ min.
Contact resistance	20 mΩ max.
Dielectric withstanding voltage	500 V AC
Operating temperature	- 40° to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material	(RoHS compliant) Copper alloy
Insulator material	(RoHS compliant) Nylon UL 94 V-0

PCB Surface Mount Layout

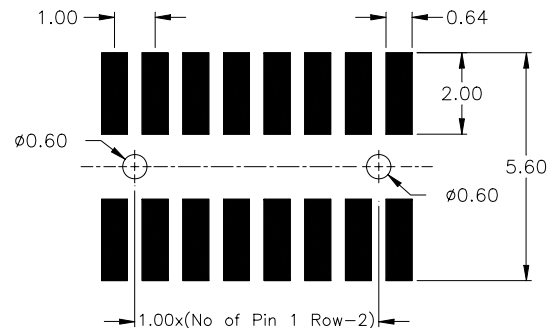

How to order

SP2 - xxx - H 51/x - 55 /00 X

Nbr of contacts	Terminal style			Plating	Packing and "pick & place pad" Option
	Code	DIM "A"	DIM "B"		
006 to 050	51/0	2.00mm	7.80mm	55 = gold	without "locating pegs"
	Other dimensions on request			Other platings on request	A = tube packing and pick & place pad
					B = reel packing and pick & place pad
					with "locating pegs"
					C = locating pegs and tube packing
					D = locating pegs; tube packing; pick & place pad
					E = locating pegs; reel packing; pick & place pad