
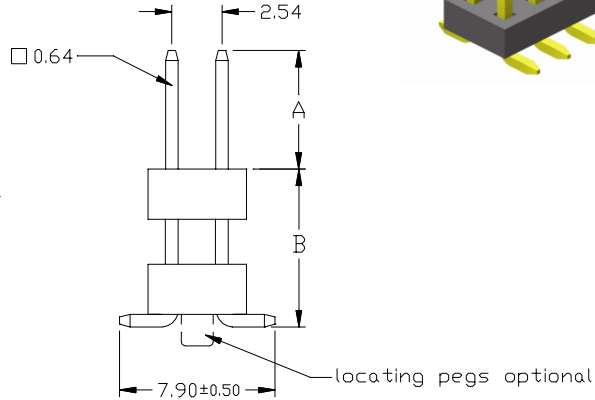
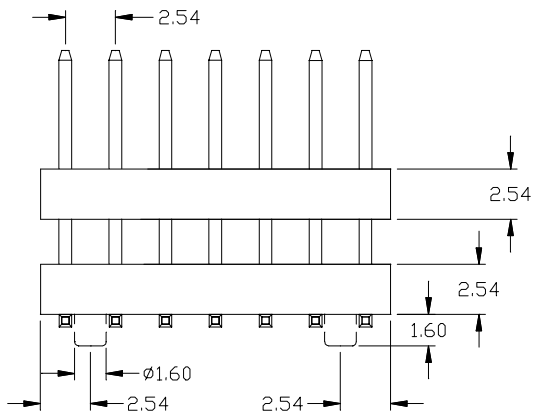
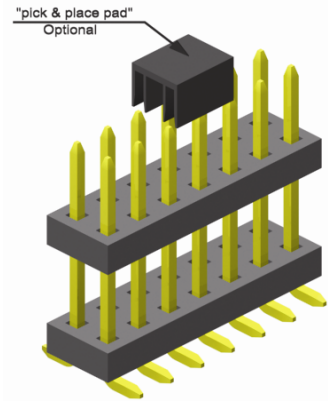


2.54mm pitch Board Spacer


- SMT -

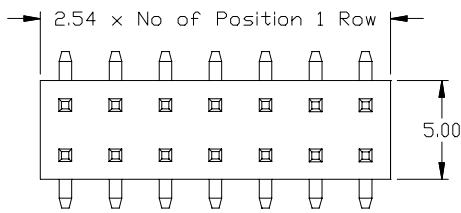

APPLICATION AND FEATURES

- **Standard: tube packing, without "locating pegs" and "pick & place pad"**
- Designed for "board to board" spacing
- Variable terminal length available
- Mate with female header 2,54 mm x 2,54 mm pitch

PCB Surface Mount Layout

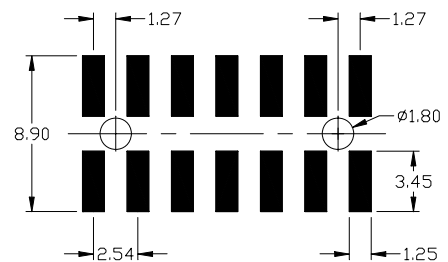

SPECIFICATIONS

Current rating	3 A
Insulator resistance	5000 MΩ min.
Contact resistance	20 mΩ max.
Dielectric withstanding voltage	500 V AC

Operating temperature	- 45°C to +125°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material	(RoHS compliant) Copper alloy
Insulator material	(RoHS compliant) Nylon UL 94 V-0

How to order

SP2 - xxx - H xxx/xx - 55 X

Nbr of contacts	Terminal			Plating	Packing and "pick & place pad" Option
004 to 080	Style	DIM "A"	DIM "B"	55 = gold Others on request	without "locating pegs"
	160/01	6.00mm	11.40mm		A = tube packing and pick & place pad
	160/02	4.50mm	17.00mm		B = reel packing and pick & place pad
	160/03	5.47mm	6.35mm		with "locating pegs"
	160/04	7.47mm	9.35mm		C = locating pegs and tube packing
	160/05	6.00mm	15.50mm		D = locating pegs; tube packing; pick & place pad
	160/06	5.46mm	14.00mm		E = locating pegs; reelpacking; pick & place pad
Other Terminal style on request					