
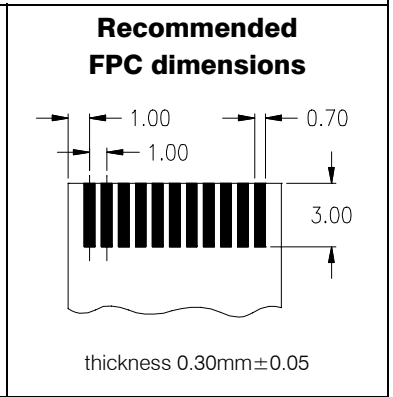
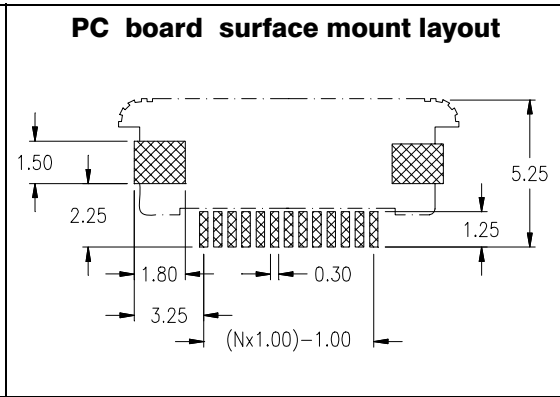
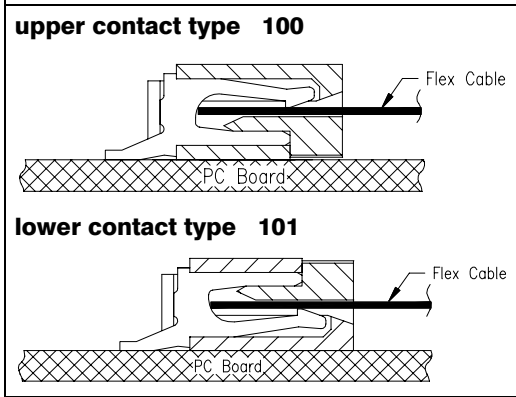


FPC Connector ZIF Type
 - SMT - 1.00mm pitch horizontal

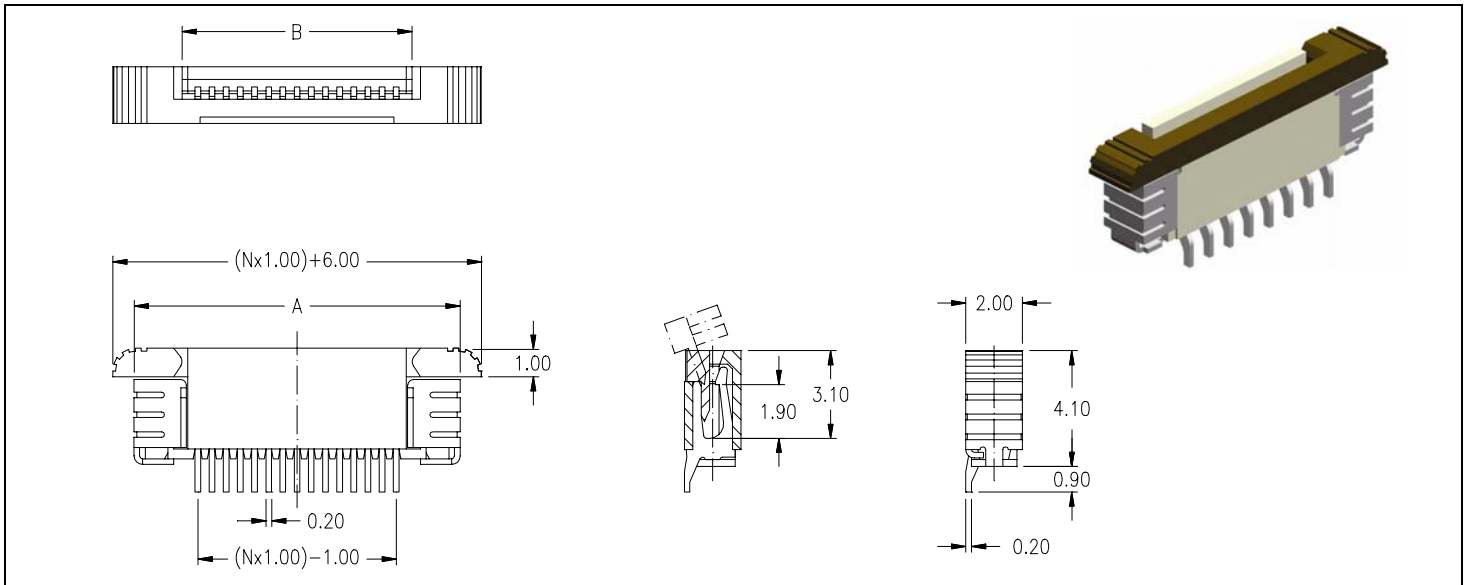

SPECIFICATIONS

Current rating 0.5 A max.
 Insulator resistance 50MΩ min.
 Contact resistance 20 mΩ max.
 Dielectric withstanding voltage 250 V AC/1 Min

Operating temperature -20° to +85°C
 Processing temperature +250°C +0/-5°C for 3 sec.
 Contact material (RoHS compliant) Phosphor Bronze
 Contact plating Tin (leadfree)
 Insulator material (RoHS compliant) Nylon UL 94 V-0

Dimensions (mm)

Contacts	A	B	Contacts	A	B	Contacts	A	B	Contacts	A	B
004	8.50	5.10	009	13.50	10.10	014	18.50	15.10	020	24.50	21.10
005	9.50	6.10	010	14.50	11.10	015	19.50	16.10	021	25.50	22.10
006	10.50	7.10	011	15.50	12.10	016	20.50	17.10	022	26.50	23.10
007	11.50	8.10	012	16.50	13.10	017	21.50	18.10	023	27.50	24.10
008	12.50	9.10	013	17.50	14.10	018	22.50	19.10	024	28.50	25.10

How to order

FCZ - xxx - H xxx - 99 / X

