


2.00mm pitch Box Header


- THT - right angle - straight - raised

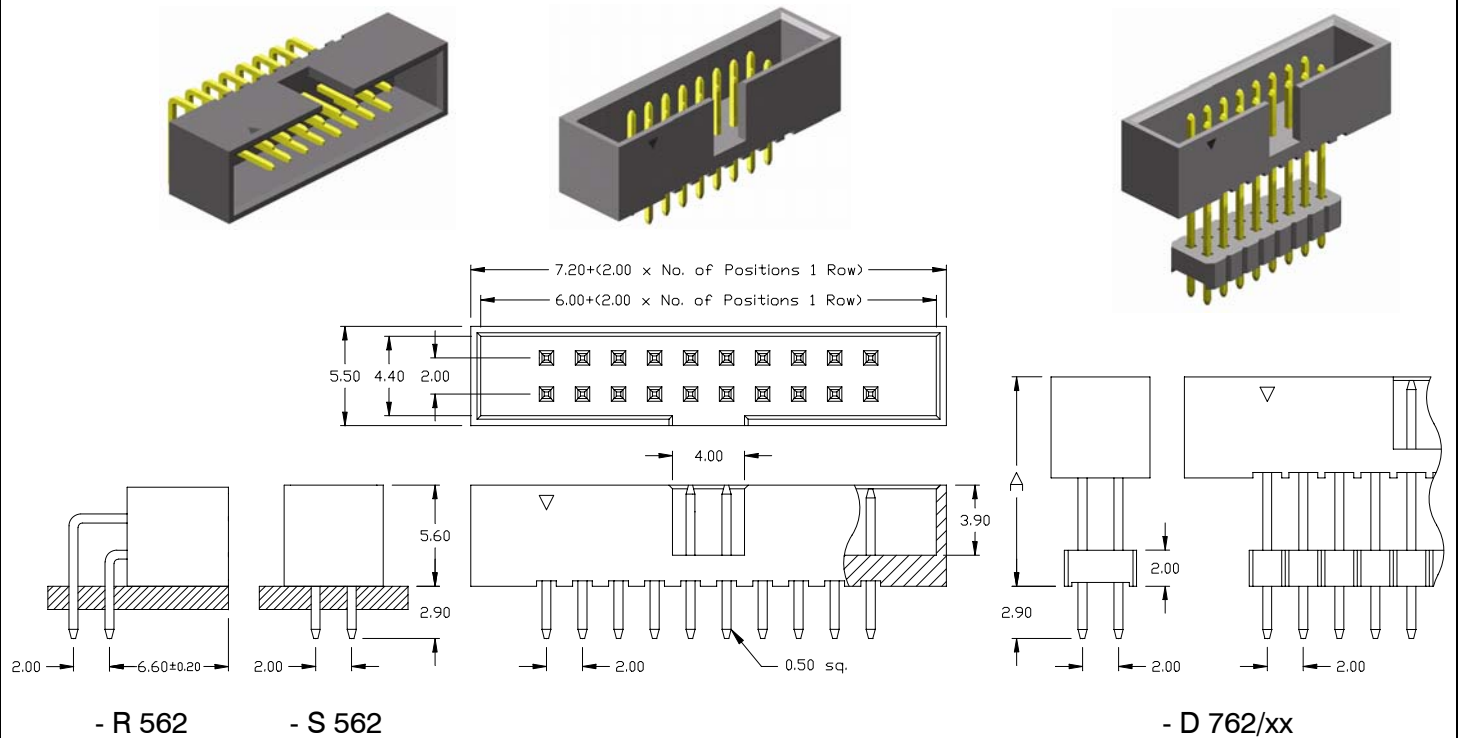

APPLICATION AND FEATURES

- Designed to mate with IDC female connector IDS-xxx-X 200-95/P page 55
- Reliable flat cable to PCB connection
- No ejection latches for space saving

P C B Hole Layout

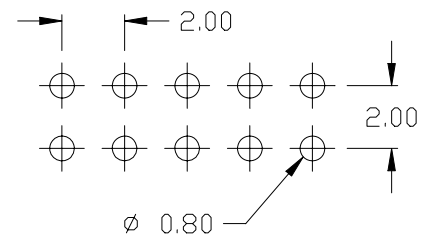

SPECIFICATIONS

Current rating	1 A	Operating temperature	- 40°C to +105°C
Insulator resistance	5000 MΩ min.	Processing temperature	+250°C +0/-5°C for 20sec.
Contact resistance	20 mΩ max.	Contact material	(RoHS compliant) Copper alloy
Dielectric withstanding	500 V AC	Insulator material	(RoHS compliant) Nylon UL 94 V-0

How to order

SLS - xxx - X xxx - 55 /2

Nbr of contacts
006 to 068
except:
038; 042; 046; 048
052; 054; 056; 058
062; 066

Version
S 562 = straight
R 562 = right angle
<u>Raised Type:</u> (dimension ±0.25mm)
D 762/00 DIM "A" = 7,60mm
D 762/01 DIM "A" = 17,80mm

Plating
55 = gold
other platings on request