
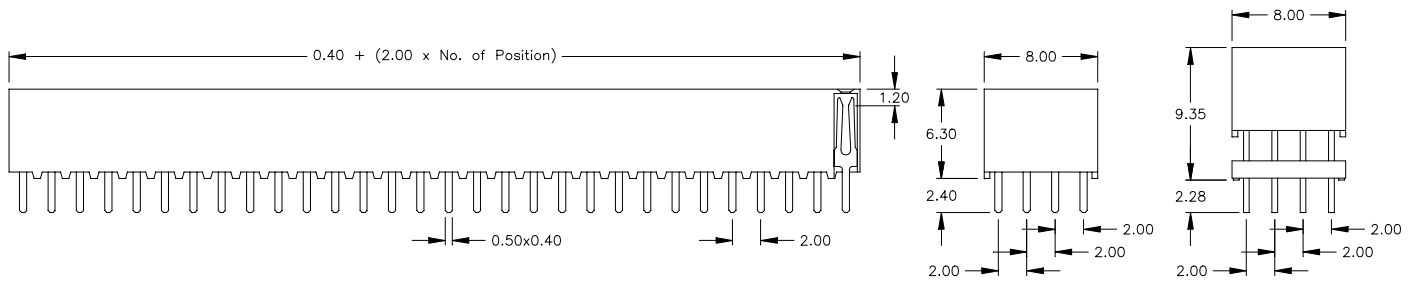
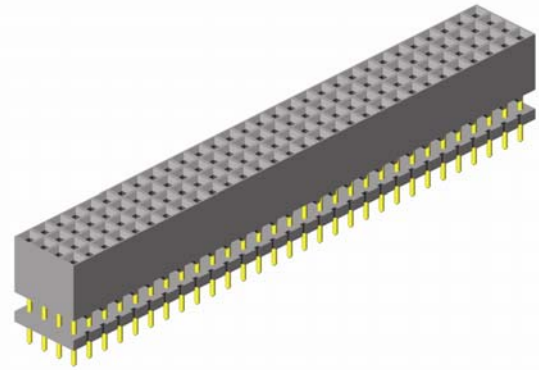


2.00mm pitch Female Header - THT -
 "PC 104+ Type" Quad Row, 120 contacts max.

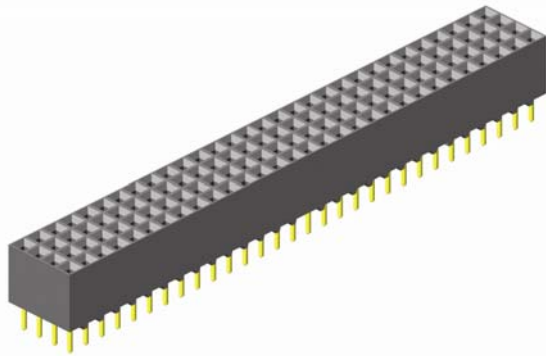


S630/0

S630/1

SPECIFICATIONS

| | |
|--|------------------|
| Current rating | 1 A |
| Insulator resistance | 5000 MΩ min. |
| Contact resistance | 20 mΩ max. |
| Dielectric withstanding voltage | 500 V AC |
| Operating temperature | - 40°C to +105°C |
| Contact material <i>(RoHS compliant)</i> | Phosphor Bronze |
| Insulator material <i>(RoHS compliant)</i> | Nylon UL 94 V-0 |

PCB Hole Layout

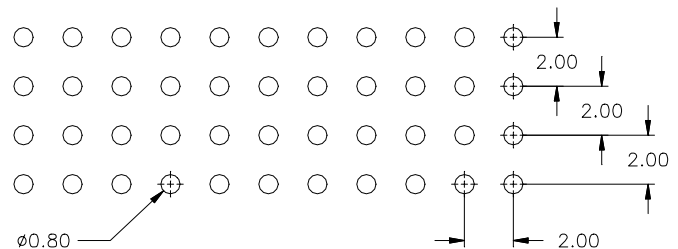

APPLICATION AND FEATURES

Low and high Profile PC 104+ Type
 Designed for "board to board" small spacing interconnection
 With standoff's for post solder cleaning
 Mate with male connector SL4 - xxx - S830/0 - xx/2 page 39

How to order

BL4 - xxx - S xxx/x - 55 /2

| Nbr of contacts | |
|---------------------|---------------|
| S630/0 Type: | |
| 020 | to 120 |
| S630/1 Type: | |
| 008 | to 120 |

| Type | |
|--------------|--|
| 630/0 | 6.30mm above PCB |
| 630/1 | 9.35mm above PCB other dimension available on request |

| Plating | |
|-----------|--------|
| 55 | = gold |