
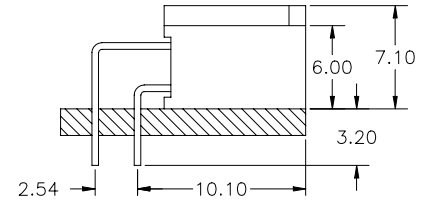

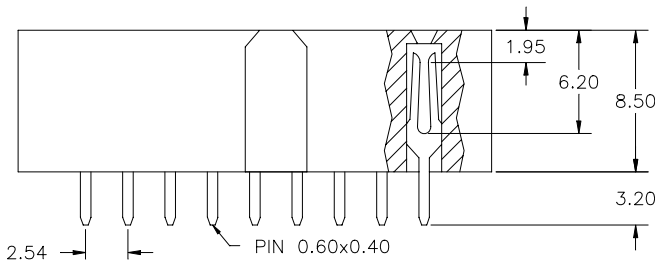
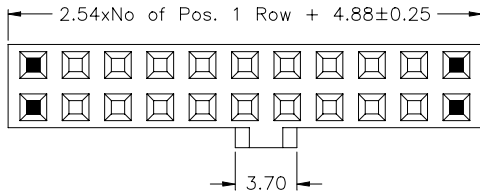
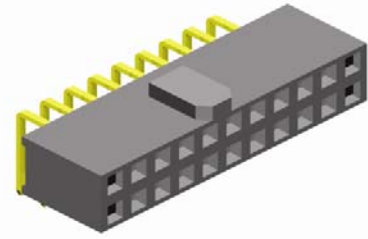


2.54mm pitch Female Header
 - THT - for "Box Header" mating



APPLICATION AND FEATURES


Mating with box (shrouded) header 2.54mm pitch
 page 63 and 64 in this catalog.

Standard with polarization bump.

Specifications

Current rating	3 A
Insulator resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Dielectric withstanding voltage	600 V AC/DC
Operating temperature	- 40° to + 105°C
Contact material	Phosphor Bronze
Insulator Material	P.B.T. UL 94 V-0

PCB Hole layout

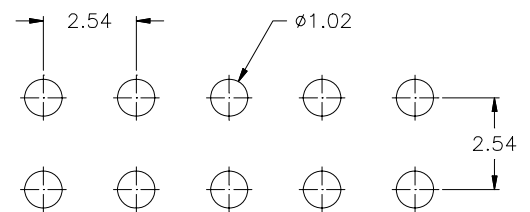

How to order

BW 2 - xxx - X 850 - 55 / P

Nbr of contacts
006; 008; 010; 014
016; 020; 024; 026
030; 034; 040; 044
048; 050; 060; 064

Terminal style
S = straight
R = right angle

Plating
55 = gold
others on request