
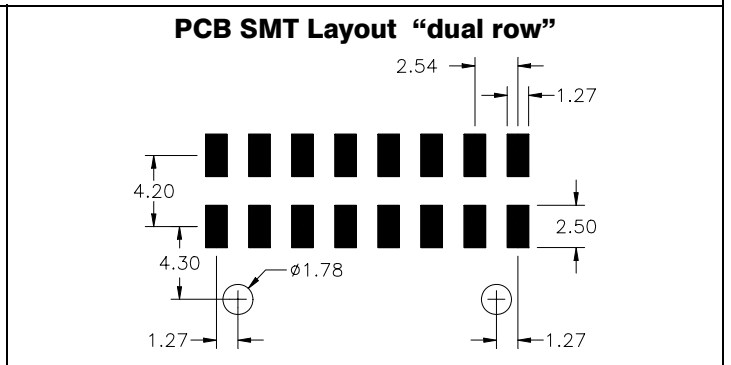
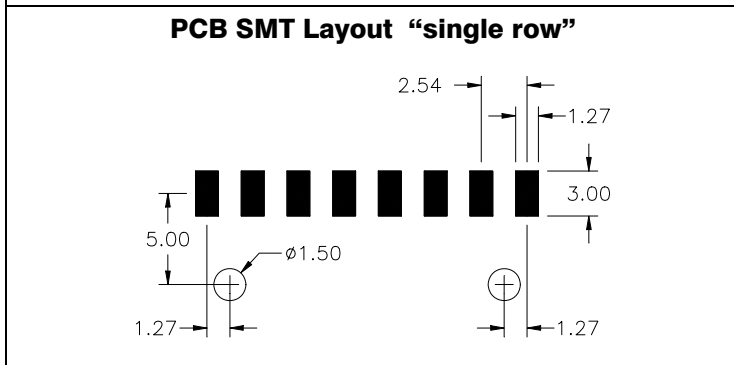


2.54mm pitch Pin Header - slanted -
- SMT - single and dual row

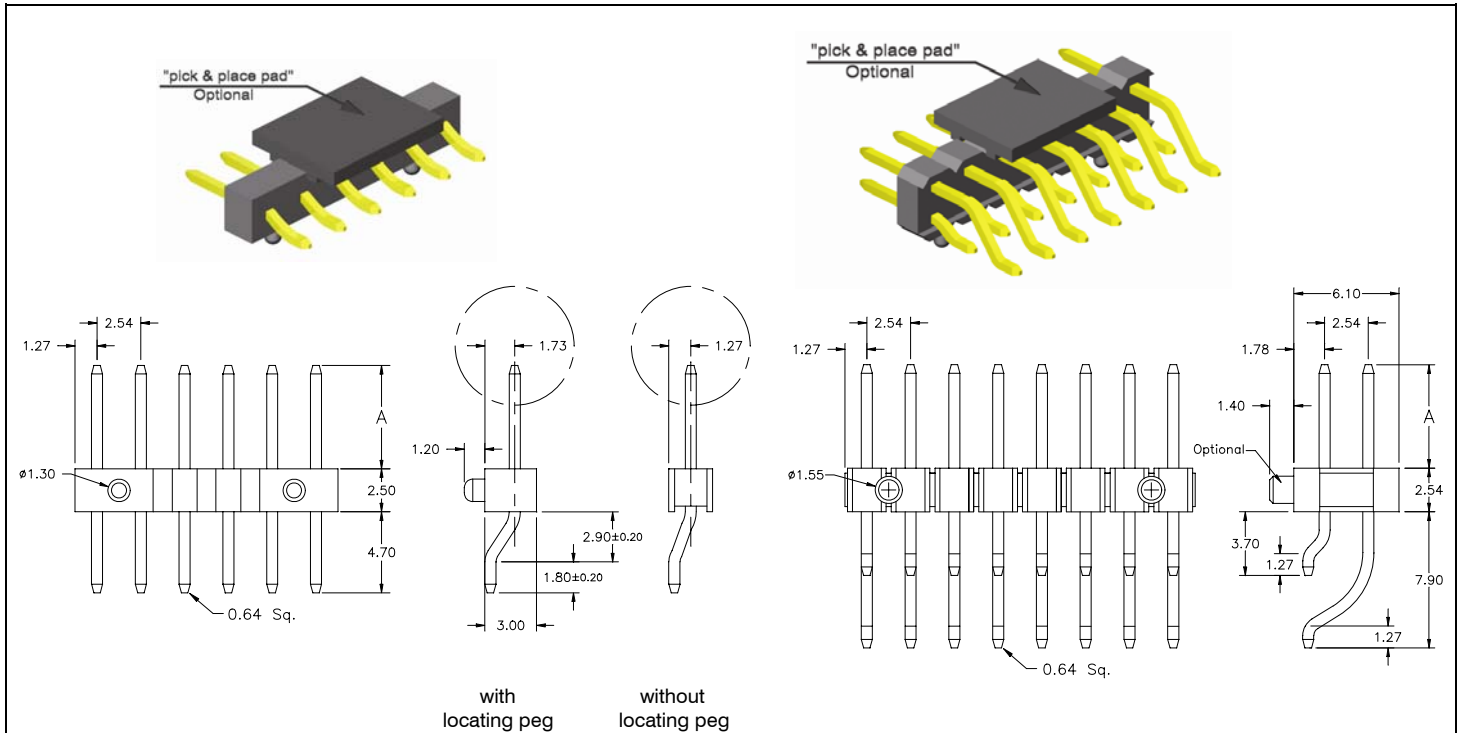

SPECIFICATIONS			
Current rating	3 A	Operating temperature	- 40°C to +105°C
Insulator resistance	5000 MΩ min.	Processing temperature	+250°C +0/-5°C for 10sec.
Contact resistance	20 mΩ max.	Contact material	(RoHS compliant) Copper alloy
Dielectric withstanding	AC 500 V	Insulator material	(RoHS compliant) Nylon UL 94 V-0

How to order

SR **X** - **xxx** - H **xxx/xx** - **xx** **X**

Rows	Nbr of contacts	Terminal style	Plating	Packing and "pick & place pad" Option
1 single row	002 to 040	Standard 135/02	Standard: 55 = gold On request: 95 = tin/gold <i>(tin leadfree)</i>	without "locating pegs" A = tube packing and pick & place pad B = reel packing and pick & place pad with "locating pegs" (for dual row up from 8-position only) C = locating pegs and tube packing D = locating pegs; tube packing; pick & place pad E = locating pegs; reel packing; pick & place pad
	003 to 030 <i>with locating peg available</i>	others: 135/01 135/03 135/04 135/05 135/06		
2 dual row	006 to 080 008 to 080 <i>with locating peg available</i>			