
## PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION								
REV	DESCRIPTION	DATE	APPROVED					
A	INITIAL RELEASE, RFS. 18885, EM	06/17/10	BS					
В	REVISE APPROVALS, ADD ENEC-VDE TO CONNECTOR, RFS. 25700, BS	11/13/14	HM					

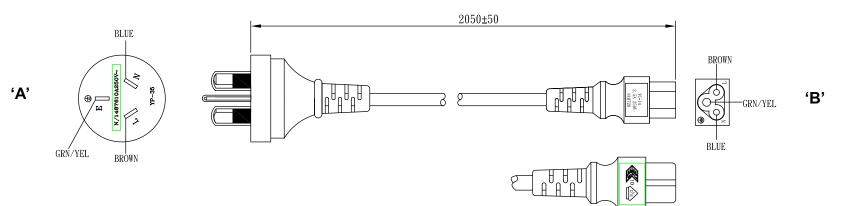

## **GENERAL SPECIFICATIONS:**

RATING: 2.5A / 250V AC

HO5VV-F, 0.75 mm<sup>2</sup>, 3 CONDUCTOR CABLE TYPE / SIZE:

SAA

TEMPERATURE RATING: 70°C CABLE JACKET COLOR: BLACK

CONDICTORS COLOR: BLUE/ BRN/GRN-YEL

OVERALL LENGTH (L): 2050 ± 50 mm 6.7 + 0.2 mmCABLE OUTER DIAMETER:


END 'A': AS3112 / 3 PRONS END 'B': IEC 320 / C5

APPROVALS PLUG: SAA

APPROVALS CONNECTOR: SAA, ENEC-VDE

## **PACKING: HANKING**





## NOTES:

prior notice

APPROVALS CABLE:

PLUG: FILE NUMBER AND RATING

CABLE: FILE NUMBER CONNECTOR: 'SAA' FILE NUMBER AND RATING

CORD. PLUG AND CONNECTOR MUST BE MARKED:

Globtek Inc. will not be liable for the safety and performance of these power Contents of this document product if unauthorized access and repair are subject to change withou occurs. End user should consult the applicable UL,CSA or EN Standards for proper

installation instruction.

Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

RELEASED By N.Frost at 2:27 pm, Nov 14, 2014

DASH NO.	PART NO	REV.		DESCRIPTION	NOTES			
TABULATION BLOCK								
		DECI .xx +	+/01 +/005 www.globtek.com Tel. 201-784-1000		rthvale, NJ 07647 Fax 201.784.0111			
INIT.BY:	EM DATE: 06/17/10	MILLIM .xx +, .xxx +,	/- 0.3 <sup>+/-</sup> 1°	DWG TITLE: AUSTRALIAN DETACHABLE CORDSET AS3112/3 - IEC320/CS				
DRAWN	NF DATE: 06/17/10	FSCN G, CC			REV. B			
APRVD:	HM DATE: 06/17/10		LE: NONE	PART NO: 2064262M0712(R)	SHEET 1/1			