


Proximity Reader Module ID RW01 (125 kHz)



FEATURES

- Multi-tag Reader for all common 125 kHz transponders
- Interfaces: RS232 and Data-/Clock interface
- Beside the integrated antenna, the reader offers a connection for an external antenna

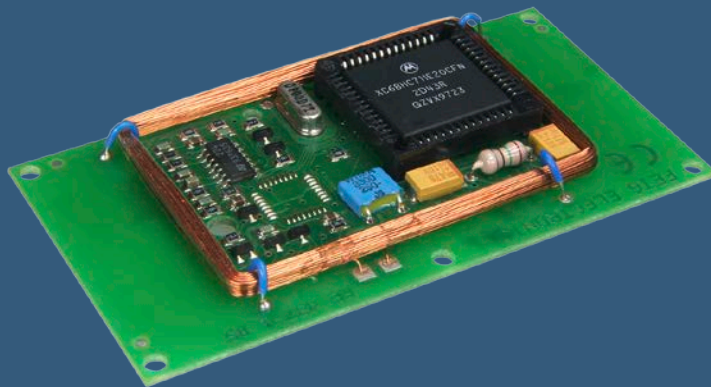

SHORT DESCRIPTION

RW01-A has been especially designed for applications such as personal identification, access control and time recording.

The Multi-tag reader is equipped with a RS232 (V24) interface and a Data-/Clock interface, which can be operated in Wiegand- or Magnetic Card emulation.

The emulation modes of the Data-/Clock interface make it easy to change from conventional identification readers to reader type ID RW01-A.

ID RW01-A can be easily adapted to the respective application by a software configuration.

TECHNICAL DATA

Dimensions (W x H x D)	90 mm x 47 mm x 11,6 mm
Operating frequency	125 kHz
Supply voltage	5 V DC +/- 5%
Current consumption	max. 300 mW
Antenna	1 x integrated 1 x connector for external antenna
Read range	Up to 12 cm with ISO transponder card
Interfaces	RS232 (V24) & Data-/Clock interface (Wiegand emulation and magnetic card emulation)
Supported transponders	125 kHz Read Only transponders* 125 kHz Read/Write transponders**
Operation modes	Polling Mode & Auto Answer Mode
Temperature range	
Operation	-25 °C up to 70 °C
Storage	-25 °C up to 70 °C

* For example ID CTxA, H4001, H4002, H4022, H4102, Unique, Q5, e5555 etc. HITAG S, HITAG 1, HITAG 2**, EM 4150**, Q5, 555x etc.

** For example ID DTxB, ID DTxC, HITAG 1, HITAG S, HITAG 2***, H4150*** etc.

FEIG ELECTRONIC reserves the right to change specification without notice at any time.
Stand of information: June 2016.



ORDER DESCRIPTION

ID RW01.AB-A Reader module

Accessories:

ID RW01 Integration Kit