


FIS LC DUPLEX MATING SLEEVE

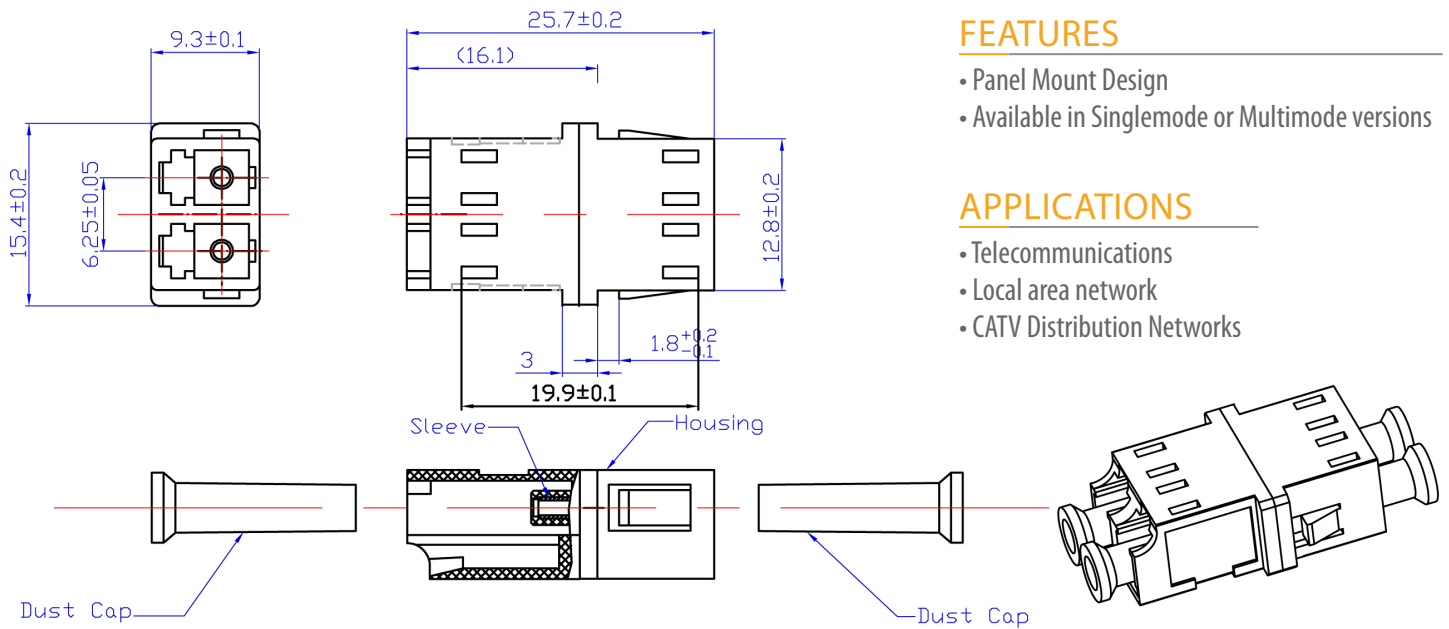

FEATURES

- Panel Mount Design
- Available in Singlemode or Multimode versions

APPLICATIONS

- Telecommunications
- Local area network
- CATV Distribution Networks

SPECIFICATIONS

Operating Temperature (°C)	-40°C to +70°C
Excess Loss	.1 dB or less Singlemode 15 dB or less Multimode

MATERIALS

Split Sleeve	Singlemode	Ceramic
	Multimode	Bronze
Body (ABS Plastic)	Blue	Singlemode
	Green	Singlemode APC
	Beige	Multimode
F1-8020		Duplex Multimode
F1-8010		Duplex Singlemode
F1-8010NF - No Flange		Duplex Singlemode
F1-8015		Duplex Singlemode APC