


FIS LC QUAD MATING SLEEVES

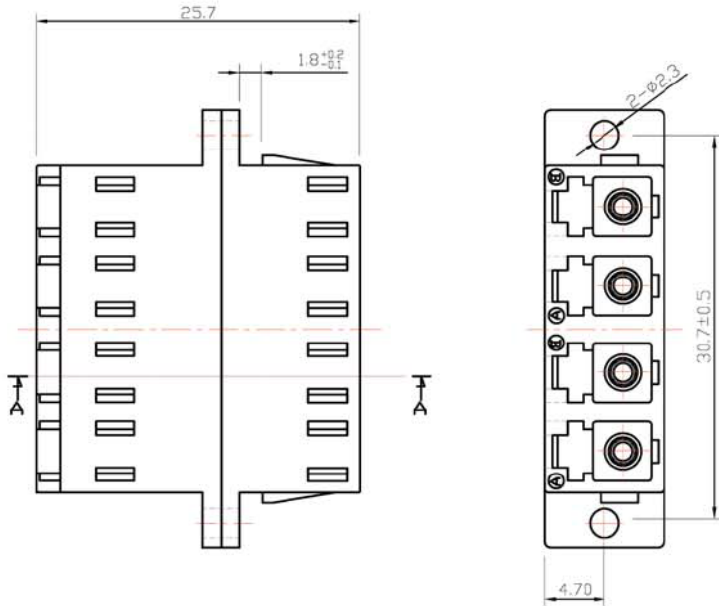


FEATURES

- LC Duplex Footprint
- Panel Mount Design
- Available in Singlemode or Multimode versions

APPLICATIONS

- Telecommunications
- Local area network
- CATV Distribution Networks

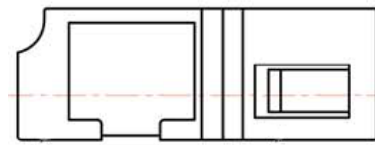

SPECIFICATIONS

| | |
|----------------------------|---|
| Operating Temperature (°C) | -40°C to +70°C |
| Excess Loss | .1 dB or less Singlemode 15 dB or less Multimode |

MATERIALS

| Split Sleeve | Singlemode | Ceramic |
|--------------------|------------|------------------|
| | Multimode | Bronze |
| Body (ABS Plastic) | | |
| F1-8045 | Blue | Singlemode |
| F1-8040 | Beige | Multimode |
| F1-8041 | Aqua | 10 Gig Multimode |