


FIS 800 SERIES ENCLOSURE

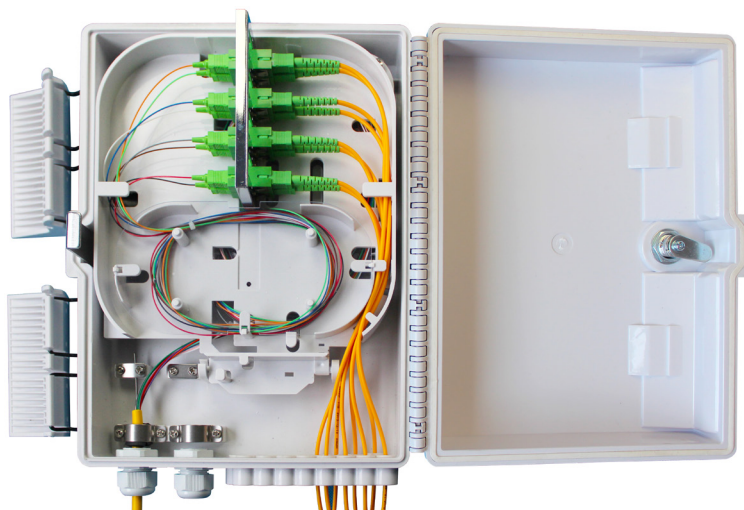

FEATURES

- IP54 Rated.
- 16/32 Fiber Port Capacity.
- 2 Fiber Inlet Ports, 16 Fiber Outlet Ports.
- Polycarbonate, UV-Resistant.
- 100% Tested to Bellcore GR-326 Standards.

The 800 series is an outdoor enclosure designed for harsh environments outside of premises and mounting in FTTX applications. The enclosure features (2) fiber inlet ports, (16) fiber outlet ports, integrated cable management, and (36) splice sleeve holders. It accommodates (24) SC simplex adapters or (24) LC duplex adapters and is compatible with flanged, 'style 3' adapters. The 800 series is constructed from a UV-resistant polycarbonate and rated to IP54. Ask your FIS sales representative about pre-loading enclosures with adapters, splitter packages and fiber pigtails.

SPECIFICATIONS

Dimensions	236 mm(W) x 100 mm(D) x 375 mm(H)
Capacity	- 16 Port / Accepts (16) SC Simplex adapters (flanged) - 32 Port / Accepts (16) LC Duplex adapters (flanged)
Material	Polycarbonate
Color	RAL7035
Weight	2.43 lbs / empty

ORDERING INFORMATION

F1-800	OSP Enclosure, Up to 32 Fibers (LC) with Splicing/Cable Management
SC Simplex Adapters	
F13800BC	FIS SC MM Adapter, Bronze Sleeve, Beige
F18320	FIS SC MM Adapter, Zirconia Sleeve, Black
F18350	FIS SC MM 50UM OM3 Adapter, Bronze Sleeve, Aqua
F13810BC	FIS SC SM/MM Adapter, Zirconia Sleeve, Blue
F14800T	FIS SC/APC Adapter, Zirconia Sleeve, Green
LC Duplex Adapters	
F18030	FIS LC Duplex MM Adapter, Beige
F18050	FIS LC MM Duplex Adapter, Aqua
F18035	FIS LC SM Duplex Adapter, Blue
F18018	FIS LC/APC SM Duplex Adapter, Green
F1LCAD02R	LC SM Duplex Adapter w/Shutter, Blue