


FIS FIXED IN-LINE ATTENUATOR

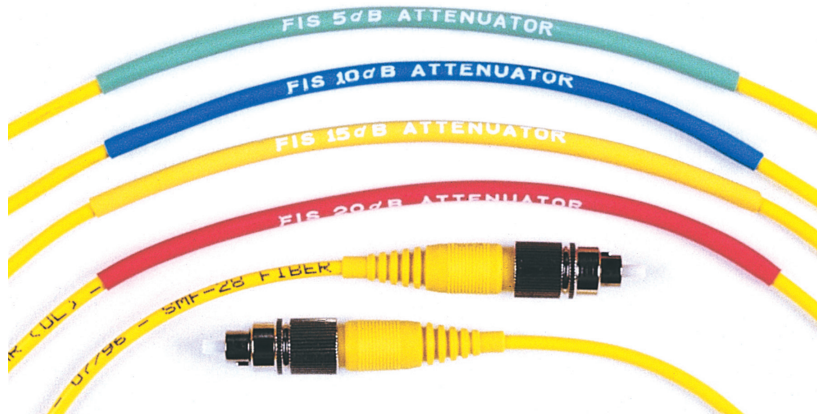

FEATURES

- 5dB, 10dB, 15dB, or 20dB attenuation levels available
- Available in Singlemode or Multimode
- Your choice of connector style
- PC, UPC, or APC finishes available (ST,SC,FC only)

The FIS In-Line Attenuator is built to meet your low reflection attenuation requirements. Each cord is custom built to accommodate your choice of fiber length, style and connector type.

SPECIFICATIONS

Attenuations Levels	5db \pm 1
	10db \pm 1
	15db \pm 2
	20db \pm 2
Length Tolerance	+3 / -0 inches
Operating Temperature	-20° to +70° C
Connector Styles Available	ST, FC, SC, LC, SMA, D4
Return Loss	PC: -25dB
	UPC: -50dB
	APC: -60dB

Singlemode

Cable Type	Simplex
Fiber	9/125um (Corning SMF 28e)
Jacket Diameter	2.9mm

Multimode

Cable Type	Simplex
Fiber	62.5/125um or 50/125um
Jacket Diameter	2.9mm

ORDERING INFORMATION

F1-ATS + 5dB or 10dB	In-line Attenuator
F1-ATS + 15dB or 20dB	In-line Attenuator