


FIS 300 SERIES ENCLOSURE

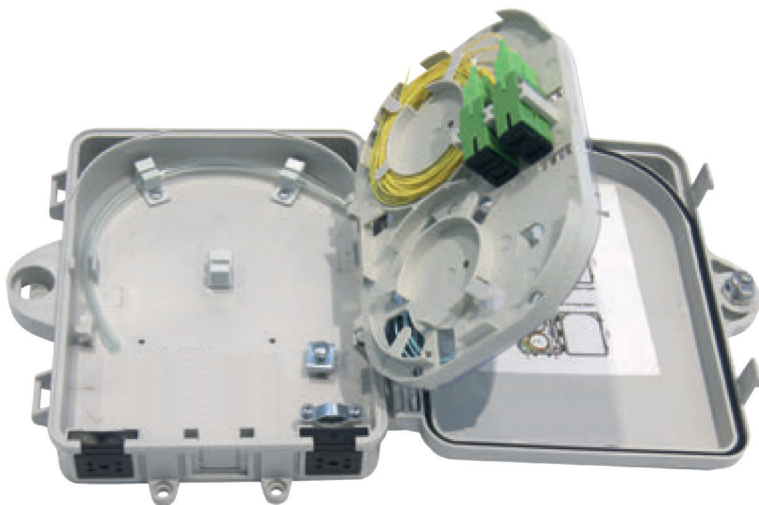

FEATURES

- IP65 Rated.
- 4/8 Fiber Port Capacity.
- 2 Fiber Inlet Ports.
- Polycarbonate, UV-Resistant.
- 100% Tested to Bellcore GR-326 Standards.

The 300 series is a small outdoor enclosure designed for harsh environments outside of premises and mounting in FTTX applications. The enclosure features (2) inlets at the bottom, integrated cable management, and (4) splice sleeve holders. It accommodates (4) SC simplex adapters or (4) LC duplex adapters and is compatible with no flange, 'style 5' adapters. The 300 series is constructed from a UV-resistant polycarbonate and rated to IP65. Ask your FIS sales representative about pre-loading enclosures with adapters, splitter packages and fiber pigtails.

SPECIFICATIONS

| | |
|-------------------|---|
| Dimensions | 165 mm(W) x 43 mm(D) x 180 mm(H) |
| Capacity | - 4 Port / Accepts (4) SC Simplex Adapters (Non-Flanged) - 8 Port / Accepts (4) LC Duplex Adapters (Non-Flanged) |
| Material | Polycarbonate |
| Color | RAL7035 |
| Weight | 0.75 lbs / Empty |

ORDERING INFORMATION

| | |
|----------------------------|---|
| F1-300 | OSP Enclosure, Up To 8 Fibers (LC) With Splicing/Cable Management |
| SC Simplex Adapters | |
| F1-3800CNF | FIS SC Simplex MM Adapter Zirconia No Flange Beige |
| F1-8350NF | FIS SC Simplex MM 50um OM3 Adapter PB No Flange Aqua |
| F1-3810NF | FIS SC Simplex SM Adapter Zirconia No Flange Blue |
| F1-4800NFT | FIS SC/APC Simplex Adapter Zirconia No Flange Green |
| LC Duplex Adapters | |
| F1-9874 | FIS LC Duplex SM Adapter Zirconia Sleeve No Flange Blue |
| F1-9873 | FIS LC Duplex SM Adapter Zirconia Sleeve No Flange Green |
| F1-8050NF | FIS LC Duplex MM OM3 Adapter PB Sleeve No Flange Aqua |
| F1-8015NF | FIS LC/APC Duplex Adapter Zirconia No Flange Green |