

[*structure pending patent approval]

Specifications Per

- IEC 60115-1, 60115-4

Features

- SMD enabled structure
- Flameproof multi-layer coating equivalent to UL 94 V-0
- Flameproof feature equivalent to overload test UL 1412
- Enhanced weld spot is reliable against surge
- Products meet RoHS requirements and do not contain substances of very high concern identified by European Chemicals Agency
- SWM series is applied in high surge applications such as high rush current protection for power capacitor, motor start-up protection, car & motorcycle engine ignition, etc. to absorb harmful surge energy, so to prevent hazard of circuit damage caused by surge energy

DIMENSIONS

Type	Body Length (L, mm)	Body Diameter (D, mm)	Soldering Spot (B, mm)
SWM100	8.50 ± 0.5	3.0 ± 0.2	1.3 Min.
SWM200	10.5 ± 0.5	4.0 ± 0.5	1.6 Min.
SWM300	12.6 ± 0.6	4.6 ± 0.5	1.8 Min.
SWM400	14.6 ± 0.6	5.1 ± 0.5	2.0 Min.

GENERAL SPECIFICATIONS

Type	Power Rating (at 70°C)	Maximum Working Voltage	Maximum Overload Voltage	Maximum Permissible Surge Voltage	Minimum Resistance	Maximum Resistance	Resistance Tolerance	Available Resistance Values
SWM100	1W	350	700	7.5KV	0.1 Ω	1.5KΩ	± 5%	E-24
SWM200	2W	400	800	8.5KV	0.1 Ω	1.5KΩ	± 5%	E-24
SWM300	3W	400	800	9KV	0.1 Ω	1.5KΩ	± 5%	E-24
SWM400	4W	450	900	11KV	0.1 Ω	1.5KΩ	± 5%	E-24

Special sizes, values, and specifications not listed available on special order.

Quality • Reliability
Cost-Down via Innovation.

■ PART NUMBER

Example: SWM200J100RTKZBK2K0

SWM200	J	100R	TKZ	BK2K0
Type	Tolerance	Resistance	TCR	Packaging
	J (5%)	100Ω 4-character code containing - 3 significant digits 1 letter multiplier <u>OHM MULTIPLIER</u> R = 1 K = 10 ³ M = 10 ⁶ G = 10 ⁹	3-character code TKZ = Default Product Temperature Coefficient. Information of typical product temperature coefficient can be found in the Technical Summary section of the datasheet.*	5-character code TR= Tape Reel (pieces per reel) SWM100 2K5=2,500 SWM200 2K0=2,000 BK = Bulk SWM100/SWM200 SWM300/SWM400 BK + Quantity

SWM


* For the availabilities of non-default temperature coefficient, please check with us. Reference for TCR letter codes can be found in section (4) of Part Number Construction in the Appendices.

■ TECHNICAL SPECIFICATIONS

Characteristics	Limits	
Dielectric Withstanding Voltage, VAC or DC	SWM100 / SWM200 / SWM300	700
	SWM400	1000
Temperature Coefficient, PPM / °C*	±100, ±300	
Operating Temperature Range, °C	-55~+200	
Insulation Resistance, MΩ	10 ⁴	
Fusing Condition	Interrupts in max. 60 seconds at x40 rated power.	

* Not applicable to all resistance values. Please check with us regarding the PPM of specific resistance value(s).

■ POWER DERATING CURVE

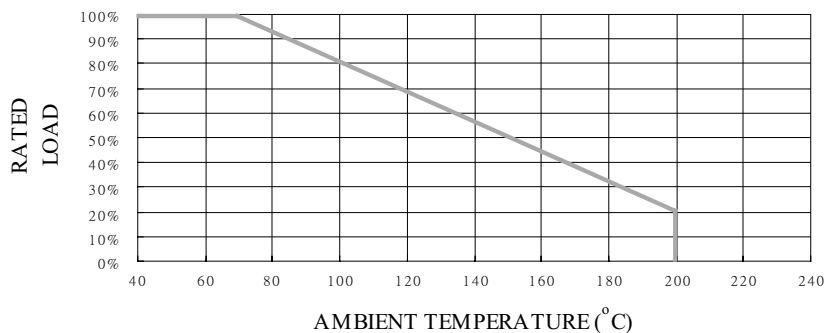

Quality • Reliability
Cost-Down via Innovation.

SWM


■ PERFORMANCE SPECIFICATIONS

Characteristics	Test Conditions	Limits		
Short Time Over Load	IEC 60115-1 4.13 5 seconds 2.5x rated voltage (not over max. overload voltage)	±2%		
Load Life In Humidity	IEC 60115-1 4.24 56 days rated load (not over max. working voltage) at (40±2)°C and (93±3)% relative humidity	±5%		
Load Life 1,000 hours	IEC 60115-1 4.25.1 Rated load (not over max. working voltage) with 1.5 hours ON, 0.5 hours OFF, at (70±2)°C	±5%		
Resistance To Soldering Heat	IEC 60115-1 4.18.2 Dip the resistor into a solder bath measured (260±5)°C and hold it for a 10±1 seconds	±1%		
Solderability	IEC 60115-1 4.17.2 Solder area covered after (230±3)°C/(2±0.2) seconds with flux applied	95% Min.		
Vibration	IEC 60115 4.22 Six hours in each parallel and axial direction with a simple harmonic motion having an amplitude of 0.75mm and 10 to 500 Hz.	±1%		
Thermal Endurance	IEC 60115-1 4.25.3 1000 hours at 200°C without load	±1%		
Thermal Shock	IEC 60115-1 4.19 -55°C 30minutes, +155°C 30minutes, 5 cycles	±3%		
Surge Test	Surge voltage = $\sqrt{(12,000 PR)}$ DC P is power rating, R is resistance value, surge voltage is not more than listed at right. Surge spec = 1.2/50µs Period = 60 sec Number of surges = 100	SWM100 SWM200 SWM300 SWM400	7.5KV 8.5KV 9KV 11KV	5%

Quality • Reliability
Cost-Down via Innovation.

SWM

■ SUGGESTED PAD LAYOUT

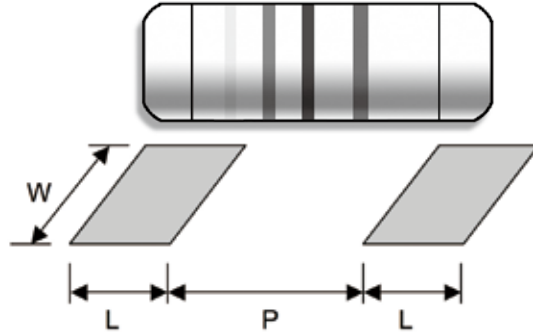

Type	Soldering Mode*	Pad Length (L, mm, Min.)	Pad Spacing (P, mm)	Pad Width (W, mm, Min.)
SWM100	Reflow (Solder thickness recommended)	3.0	4.9 ± 0.3	3.7
	Wave	3.5	4.8 ± 0.3	4.0
SWM200	Reflow (Solder thickness recommended)	4.0	6.2 ± 0.4	5.0
	Wave	4.5	6.0 ± 0.4	5.0
SWM300	Reflow (Solder thickness recommended)	4.5	8.0 ± 0.4	5.5
	Wave	5.0	7.7 ± 0.4	5.5
SWM400	Reflow (Solder thickness recommended)	5.0	9.3 ± 0.4	6.5
	Wave	5.0	9.0 ± 0.4	6.0

For better heat dissipation / lower heat resistance, increase W & L.
*Wave soldering is highly recommended for all SWM types.

■ COVER TAPE PEELING SPECIFICATION

Recommended peeling force:

SWM100, SWM200: 70±10gf

SWM300, SWM400: 80±10gf

