


M-SD-FS RECEPTACLES WITH ISOLATORS

Features:

- Low IL and high isolation
- Different wavelengths optimized
- Custom configurations available

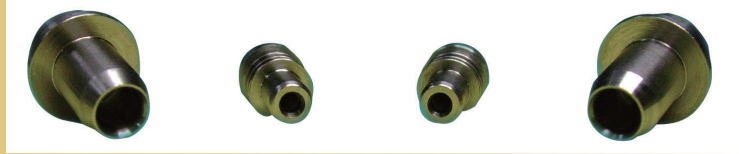

Applications:

- Transmitter Optical Sub-assembly (TOSA)

Performance Specifications:

ITEM	Recetpacles With Isolators
Mode Type	Singlemode
Diameter, mm	Ø1.25,Ø2.5
Center Wavelength	≤0.4
Insertion Loss, dB	1310,1550 (or Customer Specify)
Isolation, dB @ 1310/1550 nm, 25°C	≥
Effective Clear Apertare, nm	>/=0.4 (or Customer Specify)
Parts Length	To any specified length