

iCCMT-308 (0.8-3 GHz)

Intelligent Computer Controlled Microwave Tuner

General

The Focus iCCMT-308 Intelligent Computer Controlled Microwave Tuner has been designed for 0.8 to 3.0 GHz operation, making it an integral part of many load pull and noise setups. The iCCMT-308 allows for full and accurate characterization of packaged and on-wafer transistors. Optional upgrades include a balancing kit for reliable on-wafer testing, performance-tuned slugs, patented prematch section and low-loss bend lines. The iCCMT-308 makes use of Focus' proprietary TCP/IP capable iTuner technology with built in microprocessor and command language, allowing tuning to any interpolated impedance within the tuning range with a typical accuracy of 40dB or better. As such, the iCCMT-308 can be used with Focus' software or independently by using the Focus ActiveX control. iTuner allows for full customization and integration with popular software applications such as Agilent VEE and LabView. Typical uses include GSM, TDMA, CDMA, WiFi, WiMax and radar design.



Specifications

Frequency Range (GHz)	0.8 - 3.0
VSWR (min)	≥12:1
VSWR (typical)	20:1
Insertion Loss (dB)	0.201
Repeatability (min, dB)	40
Repeatability (typical, dB)	50

Model	Connector Type	Power Handling (W, CW) ³	Length A (in)
iCCMT-308	APC-7	30	14.22
iCCMT-308-N	N	90	14.87
iCCMT-308-7/16	7/16	250	12.37


Step Size (carriage, μm) 25.4 Phase Resolution @ 0.8 GHz 0.049° /step Phase Resolution @ 3.0 GHz 0.183° /step Step Size (probe, μm) 1.5 Tuner Weight (lbs) 15.0 Shipping Weight (lbs) 40.0² Size See Dimensions

Power Supply Specifications

Input (AC) 100-240V, 1.8A Output (DC) 12V, 5A



Dimensions

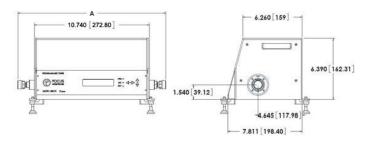


- Measured at 3.0 GHz, probe withdrawn
- ² Includes packaging and accessories

3 Measured at 10:1 VSWR



Typical VSWR

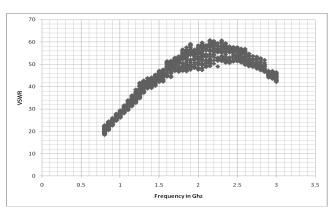

Automatic Measurement Systems 1603 St. Regis, Dollard-des-Ormeaux, Quebec, Canada H9B 3H7 T: (514) 684-4554 • F: (514) 684-8581 • W: www.focus-microwaves.com