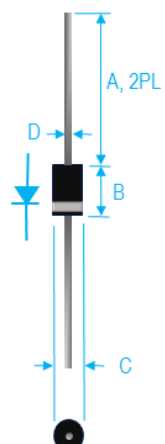


## 3A FAST RECOVERY GLASS PASSIVATED RECTIFIER



Dim.	Value Inch[mm]	
	Min.	Max.
A	1.000[25.40]	---
B	0.335[8.51]	0.375[9.52]
C	0.197[5.00]	0.220[5.59]
D	0.048[1.22]	0.052[1.32]

### PRODUCT FEATURES

1. FLAMMABILITY CLASSIFICATION: 94V-0
2. GLASS PASSIVATED CHIP JUNCTION
3. HIGH SURGE CURRENT CAPABILITY
4. CASE: TRANSFER MOLDED, DO-201AD
5. DIMENSIONS IN INCHES AND (MILLIMETERS)
6. POLARITY: INDICATED BY CATHODE BAND
7. WEIGHT : 1.2 GRAMS
8. TERMINAL SOLDERABILITY: PER MIL-STD-202, METHOD 208
9. RoHS

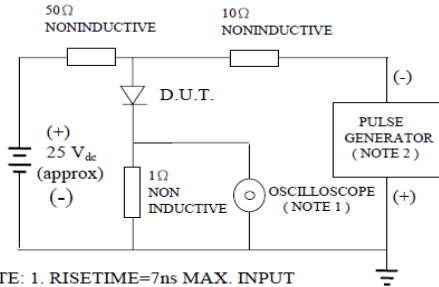
MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED. STORAGE AND OPERATING TEMPERATURE RANGE -55°C TO +150°C. SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%.

RATINGS	SYMBOL	VALUE	UNITS
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT, 0.375"(9.5mm) LEAD LENGTH @ 55°C	$I_o$	3	A
PEAK FWD SURGE CURRENT, 8.3ms HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	$I_{FSM}$	125	A
TYPICAL JUNCTION CAPACITANCE(NOTE 1)	$C_J$	28	pF
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta ja}$	20	°C/W
MAXIMUM FORWARD VOLTAGE	$V_F$	1.3	V
MAXIMUM REVERSE CURRENT @ 25°C	$I_R$	5	uA
MAXIMUM REVERSE CURRENT @ 100°C	$I_R$	50	uA

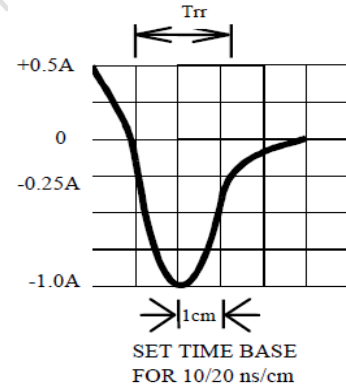
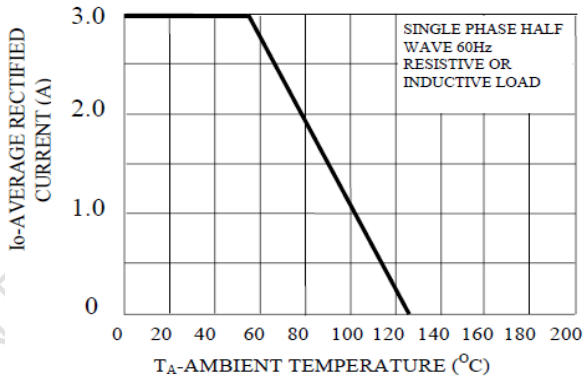
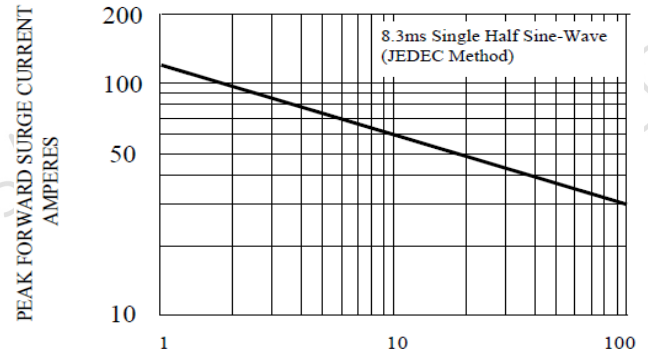
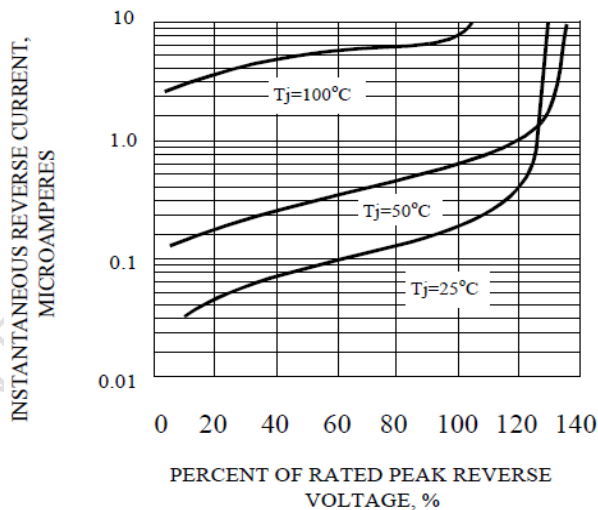
1. MEASURED @ 1.0 MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 V
2. BOTH LEADS ATTACHED TO HEATSINK 63.5x63.5x1 (mm) COPPER PLATE AT LEAD LENGTH 5mm
3. REVERSE RECOVERY TEST CONDITIONS:  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $IRR=0.25A$
4. MAXIMUM FORWARD VOLTAGE AT  $I_o$  DC

PART NUMBER	MAX RECURRENT PK REV VOLTAGE $V_{RRM}$ (V)	MAX RMS VOLTAGE $V_{RMS}$ (V)	MAX DC BLOCKING VOLTAGE $V_{DC}$ (V)	MAX REV RECOVERY TIME $T_{RR}$ (nS)
FR301G	50	35	50	150
FR302G	100	70	100	150
FR303G	200	140	200	150
FR304G	400	280	400	150
FR305G	600	420	600	250
FR306G	800	560	800	500
FR307G	1000	700	1000	500

## RATING AND CHARACTERISTIC CURVES

**FIG. 1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC**


NOTE: 1. RISE TIME = 7ns MAX. INPUT IMPEDANCE = 1 MEGOHM 22PF  
 2. RISE TIME = 10ns MAX. SOURCE IMPEDANCE = 50OHMS


**Fig. 2-MAXIMUM CURRENT DERATING CURVE**

**Fig. 3-MAXIMUM FORWARD SURGE NUMBER OF CYCLES**

**FIG. 4-TYPICAL REVERSE CHARACTERISTICS**

**FIG. 5-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**
