



HER151G THRU HER158G SPECIFICATIONS

Rev. A

1.5A ULTRA FAST RECOVERY RECTIFIER

<table><thead><tr><th rowspan="2">Dim.</th><th colspan="2">Value Inch[mm]</th></tr><tr><th>Min.</th><th>Max.</th></tr></thead><tbody><tr><td>A</td><td>1.000[25.40]</td><td>---</td></tr><tr><td>B</td><td>0.230[5.84]</td><td>0.300[7.62]</td></tr><tr><td>C</td><td>0.104[2.64]</td><td>0.140[3.56]</td></tr><tr><td>D</td><td>0.028[0.71]</td><td>0.034[0.86]</td></tr></tbody></table>		Dim.	Value Inch[mm]		Min.	Max.	A	1.000[25.40]	---	B	0.230[5.84]	0.300[7.62]	C	0.104[2.64]	0.140[3.56]	D	0.028[0.71]	0.034[0.86]	PRODUCT FEATURES 1. FLAMMABILITY CLASSIFICATION: 94V-0 2. LOW LEAKAGE 3. LOW FORWARD VOLTAGE DROP 4. HIGH SURGE CURRENT CAPABILITY 5. ULTRA FAST SWITCHING 6. CASE: MOLDED PLASTIC, DO-15 7. POLARITY: INDICATED BY CATHODE BAND 8. WEIGHT: 0.4 GRAMS 9. LEADS: SOLDERABILITY PER MIL-STD-202 METHOD 208 10. PULLING TEST: 2.3 KG 11. RoHS
Dim.	Value Inch[mm]																		
	Min.	Max.																	
A	1.000[25.40]	---																	
B	0.230[5.84]	0.300[7.62]																	
C	0.104[2.64]	0.140[3.56]																	
D	0.028[0.71]	0.034[0.86]																	

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED STORAGE AND OPERATING TEMPERATURE RANGE -55°C TO +125°C. SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%.

RATINGS	SYMBOL	VALUE	UNITS
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT 0.375"(9.5mm) LEAD LENGTH @ TA=50°C	I_O	1.5	A
PEAK FWD SURGE CURRENT, 8.3ms HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	50	A
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta ja}$	40	°C/W
MAXIMUM REVERSE CURRENT @ 25°C	I_R	5	uA
MAXIMUM REVERSE CURRENT @ 100°C	I_R	100	uA

1. C_f MEASURED @ 1 MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS
2. BOTH LEADS ATTACHED TO HEAT SINK 20x20x1t(mm) COPPER PLATE @ LEAD LENGTH 5mm
3. REVERSE RECOVERY TEST CONDITIONS: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$
4. MAXIMUM FORWARD VOLTAGE @ I_O DC

PART NUMBER	MAX RECURRENT PEAK REV VOLTAGE V_{RRM} (V)	MAX RMS VOLTAGE V_{RMS} (V)	MAX DC BLOCKING VOLTAGE V_{DC} (V)	MAX FWD VOLTAGE V_F (V)	TYPICAL CAP. C_J (PF)	MAX REVERSE RECOVERY TIME T_{RR} (ns)
HER151G	50	35	50	1.0	30	50
HER152G	100	70	100	1.0	30	50
HER153G	200	140	200	1.0	30	50
HER154G	300	210	300	1.3	30	50
HER155G	400	280	400	1.3	20	50
HER156G	600	420	600	1.85	20	75
HER157G	800	560	800	1.85	20	75
HER158G	1000	700	1000	1.85	20	75

RATING AND CHARACTERISTIC CURVES

FIG. 1 -TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

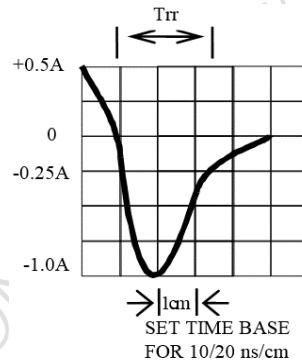
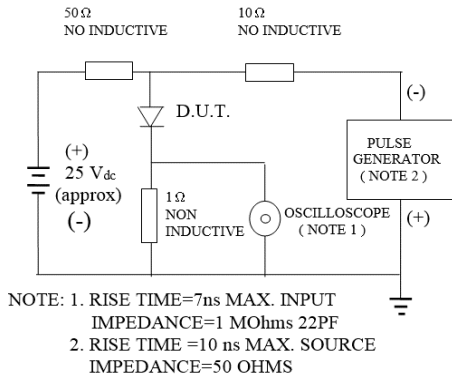


FIG. 2-TYPICAL FORWARD CURRENT DERATING CURVE

FIG. 3-TYPICAL REVERSE CHARACTERISTICS

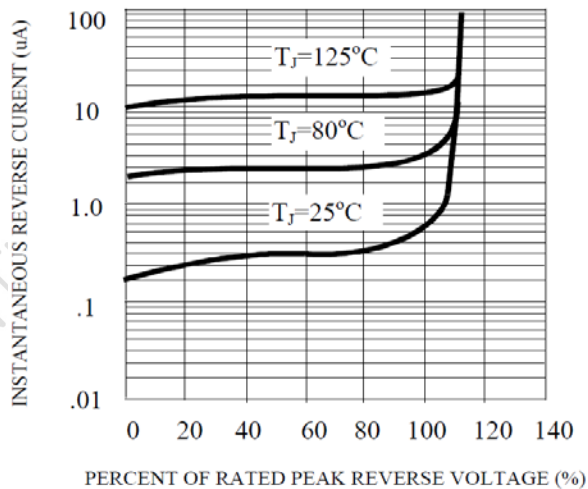


FIG. 4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

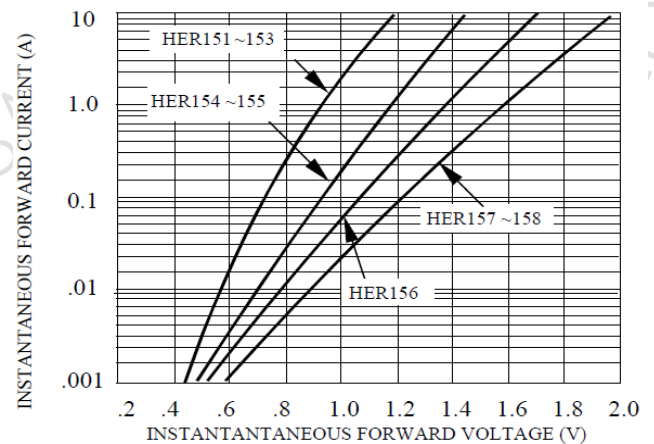


FIG. 5-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

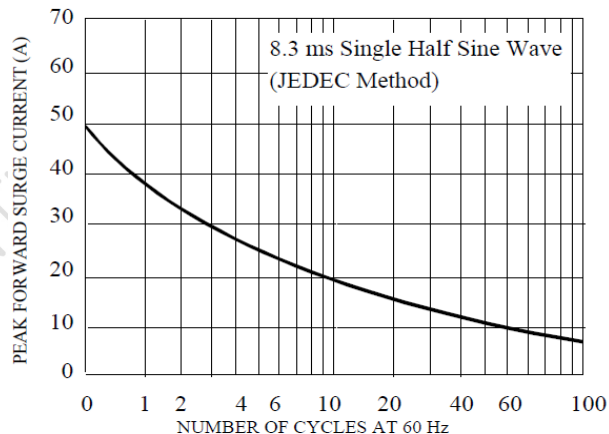


FIG. 6-TYPICAL JUNCTION CAPACITANCE

