


A. Electrical Specifications:


P/N	L (nH)	Tol.	Test Freq. (MHz)	Q Min.	SRF Min. (GHz)	DCR Max. (Ω)	I rms. Max. (mA)
TF100505-1N0_	1.0	S, C, B	100	8	10	0.08	300
TF100505-1N1_	1.1	S, C, B	100	8	10	0.08	300
TF100505-1N2_	1.2	S, C, B	100	8	10	0.09	300
TF100505-1N3_	1.3	S, C, B	100	8	10	0.09	300
TF100505-1N5_	1.5	S, C, B	100	8	10	0.10	300
TF100505-1N6_	1.6	S, C, B	100	8	10	0.10	300
TF100505-1N8_	1.8	S, C, B	100	8	6.0	0.12	300
TF100505-2N0_	2.0	S, C, B	100	8	6.0	0.12	300
TF100505-2N2_	2.2	S, C, B	100	8	6.0	0.13	300
TF100505-2N4_	2.4	S, C, B	100	8	6.0	0.13	300
TF100505-2N7_	2.7	S, C, B	100	8	6.0	0.16	300
TF100505-3N0_	3.0	S, C, B	100	8	6.0	0.16	300
TF100505-3N3_	3.3	S, C, B	100	8	6.0	0.16	300
TF100505-3N6_	3.6	S, C, B	100	8	5.0	0.20	300
TF100505-3N9_	3.9	S, C, B	100	8	4.0	0.20	300
TF100505-4N3_	4.3	S, C, B	100	8	4.0	0.20	300
TF100505-4N7_	4.7	S, C, B	100	8	4.0	0.20	300
TF100505-5N1_	5.1	S, C, B	100	8	4.0	0.23	300
TF100505-5N6_	5.6	S, C, B	100	8	4.0	0.23	300
TF100505-6N2_	6.2	S, C, B	100	8	3.9	0.25	300
TF100505-6N8_	6.8	J, G	100	8	3.9	0.25	300
TF100505-7N5_	7.5	J, G	100	8	3.7	0.28	300
TF100505-8N2_	8.2	J, G	100	8	3.5	0.28	300
TF100505-9N1_	9.1	J, G	100	8	3.4	0.30	300
TF100505-10N_	10.0	J, G	100	8	3.2	0.31	300
TF100505-12N_	12.0	J, G	100	8	2.6	0.45	300
TF100505-15N_	15.0	J, G	100	8	2.3	0.55	300
TF100505-18N_	18.0	J, G	100	8	2.0	0.65	300
TF100505-22N_	22.0	J, G	100	8	1.6	0.70	300
TF100505-27N_	27.0	J, G	100	8	1.4	0.80	300
TF100505-33N_	33.0	J, G	100	8	1.2	0.90	200
TF100505-39N_	39.0	J, G	100	8	1.1	1.00	200
TF100505-47N_	47.0	J, G	100	8	0.9	1.10	200
TF100505-56N_	56.0	J, G	100	8	0.75	1.10	200
TF100505-68N_	68.0	J, G	100	8	0.75	1.20	180
TF100505-82N_	82.0	J, G	100	8	0.6	1.30	150
TF100505-R10_	100.0	J, G	100	8	0.6	1.60	150
TF100505-R12_	120.0	J, G	100	8	0.6	1.60	150
TF100505-R15_	150.0	J, G	100	8	0.55	2.40	140
TF100505-R18_	180.0	J, G	100	8	0.50	3.70	130
TF100505-R22_	220.0	J, G	100	8	0.45	4.20	120
TF100505-R27_	270.0	J, G	100	8	0.45	4.80	110

B. Dimensions: mm (Inch)

Series	a	b	c	d	e	f	g
TF100505	1.0(0.040)	0.5(0.020)	0.5(0.020)	0.25(0.010)	2.20(0.086)	0.70(0.028)	0.40(0.016)
Tol.	± 0.1(0.004)	± 0.1(0.004)	± 0.1(0.004)	± 0.15(0.006)	Typ.	Typ.	Typ.

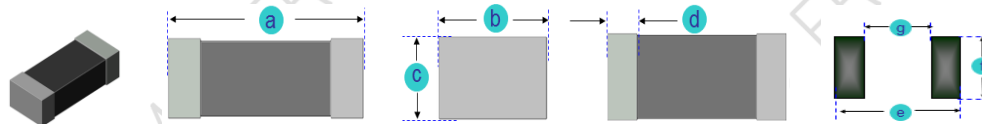

C. Part Number Key:

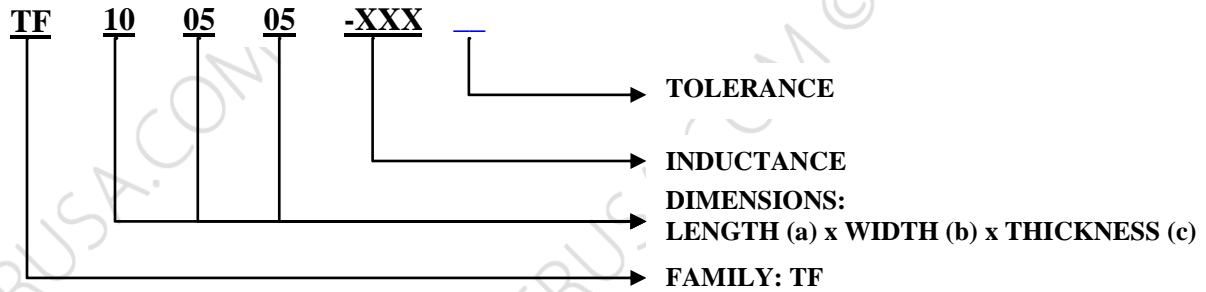

D. General Information:

1. P/N: “TF100505-xxx_”, “TF100505” = Type, “xxx” = Inductance, “_” = Tolerance.
2. Tolerance “_”: J= ± 5%, G= ± 2%, S= ±0.3nH, C= ± 0.2nH, B= ± 0.1nH.
3. The product’s materials: Ceramic.
4. Excellent solder ability and high heat resistance for either flow or reflow soldering.
5. Monolithic structures for highly reliable surface mount applications.
6. Superior Q characteristics guaranteed over the wide frequency and allow high frequency application.
7. The completely monolithic structure gives high reliability and allows high SRF.
8. Both flow and IR re-flow application are possible.
9. Operating temperature: -55°C to +125°C
10. Maximum Temperature Rise: 15°C (when measured at 25°C ambient).
11. Unspecified values available on request.
12. Inductance and Current range: From 1.0nH (300mA) to 270.0nH (110mA)
13. SRF: From 0.45 GHz to 10 GHz
14. MSL: Level 1.


E. Applications:

1. Game Consoles
2. Set Top Boxes
3. Cables Modems
4. Computers
5. Mobile Communication Devices (Cell Phones, Radios, etc.)


F. Supplementary Information:

1. Packaging Information

CARRIER TAPE REELS

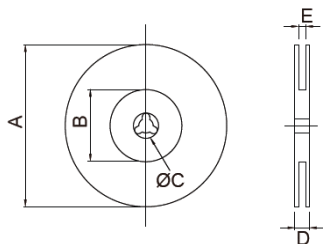

TAPE DIMENSIONS (mm)

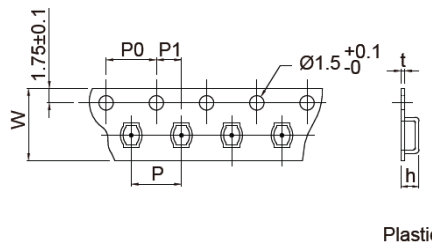

Plastic

Series P/N	Reel dimensions (mm)					Tape dimensions (mm)						Parts per reel		Quantity per	
	A	B	C	D	E	W	P	P0	P1	h	t	7"	13"	Box	Carton
TF100505(0402)	180	75	13	12.5	10	8	2	4	2	---	0.60	10,000	---	---	500,000

2. RoHS Reflow Solder Profile



TF100505 (0402) Series
SMD MULTILAYER CERAMIC CHIP INDUCTORS
Rev. B



Typical RoHS Reflow Profile

