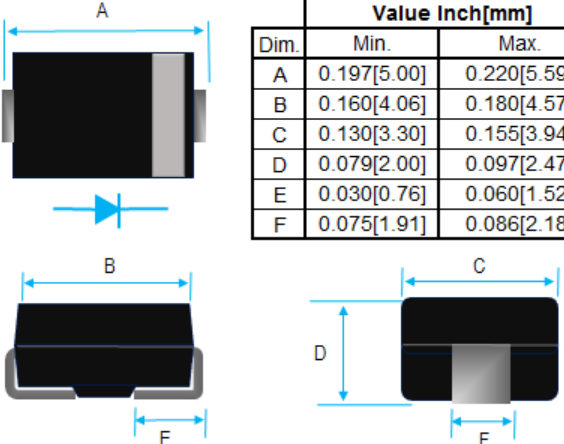


## 5A SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

	<table border="1"> <thead> <tr> <th colspan="3">Value Inch[mm]</th> </tr> <tr> <th>Dim.</th> <th>Min.</th> <th>Max.</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>0.197[5.00]</td> <td>0.220[5.59]</td> </tr> <tr> <td>B</td> <td>0.160[4.06]</td> <td>0.180[4.57]</td> </tr> <tr> <td>C</td> <td>0.130[3.30]</td> <td>0.155[3.94]</td> </tr> <tr> <td>D</td> <td>0.079[2.00]</td> <td>0.097[2.47]</td> </tr> <tr> <td>E</td> <td>0.030[0.76]</td> <td>0.060[1.52]</td> </tr> <tr> <td>F</td> <td>0.075[1.91]</td> <td>0.086[2.18]</td> </tr> </tbody> </table>		Value Inch[mm]			Dim.	Min.	Max.	A	0.197[5.00]	0.220[5.59]	B	0.160[4.06]	0.180[4.57]	C	0.130[3.30]	0.155[3.94]	D	0.079[2.00]	0.097[2.47]	E	0.030[0.76]	0.060[1.52]	F	0.075[1.91]	0.086[2.18]	<b>PRODUCT FEATURES</b> <ol style="list-style-type: none"> <li>1. FLAMMABILITY CLASSIFICATION: 94V-0</li> <li>2. EXTREMELY LOW <math>V_F</math></li> <li>3. MAJORITY CARRIER CONDUCTION</li> <li>4. BUILT-IN STRAIN RELIEF</li> <li>5. LOW PROFILE</li> <li>6. CASE: MOLDED PLASTIC, DO-214AA (SMB)</li> <li>7. DIMENSIONS IN INCHES AND (MILLIMETERS)</li> <li>8. POLARITY: INDICATED BY CATHODE BAND</li> <li>9. WEIGHT 0.093 GRAMS</li> <li>10. RoHS</li> </ol>
	Value Inch[mm]																										
Dim.	Min.	Max.																									
A	0.197[5.00]	0.220[5.59]																									
B	0.160[4.06]	0.180[4.57]																									
C	0.130[3.30]	0.155[3.94]																									
D	0.079[2.00]	0.097[2.47]																									
E	0.030[0.76]	0.060[1.52]																									
F	0.075[1.91]	0.086[2.18]																									

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED STORAGE AND OPERATING TEMPERATURE RANGE -55°C TO +125°C. SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%.

RATINGS	SYMBOL	VALUE	UNITS
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT (SEE FIG.1)	$I_O$	5.0	A
PEAK FWD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE	$I_{FSM}$	150	A
TYPICAL JUNCTION CAPACITANCE(NOTE1)	$C_j$	300	pF
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta JA}$	55	°C/W
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta JL}$	17	°C/W
MAXIMUM REVERSE CURRENT AT 25°C	$I_R$	1000	uA

1. MEASURED AT 1.0 MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 V

2. P.C.B. MOUNTED 0.55"x0.55 "(14x14 mm ) 0.013mm THICK COPPER PAD AREAS

3. MAXIMUM FORWARD VOLTAGE AT  $I_O$

PART NUMBER	MAX. RECURRENT PEAK REVERSE VOLTAGE $V_{RRM}$ (V)	MAX. RMS VOLTAGE $V_{RMS}$ (V)	MAX. DC BLOCKING VOLTAGE $V_{DC}$ (V)	MAX. FORWARD VOLTAGE $V_F$ (V)
SS52B	20	14	20	0.55
SS53B	30	21	30	0.55
SS54B	40	28	40	0.55
SS55B	50	35	50	0.70
SS56B	60	42	60	0.70
SS58B	80	56	80	0.85
SS510B	100	70	100	0.85

## RATING AND CHARACTERISTIC CURVES

FIG. 1 - FORWARD CURRENT DERATING CURVE

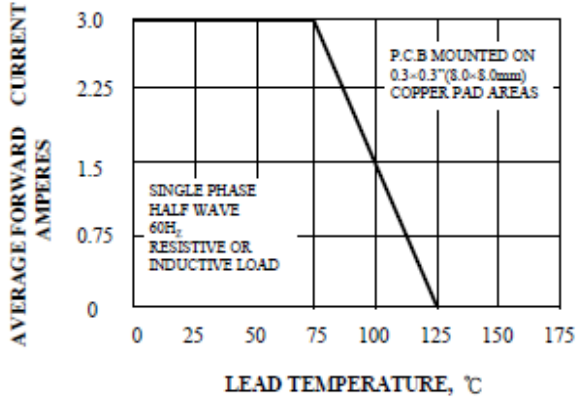


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

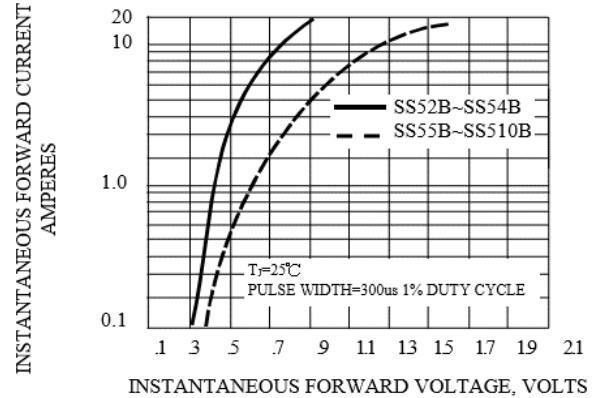


FIG. 3A - TYPICAL REVERSE CHARACTERISTICS

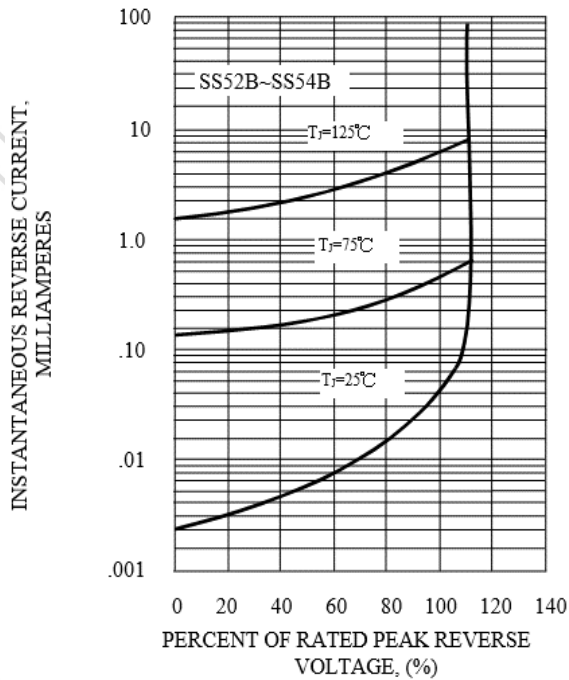


FIG. 3B - TYPICAL REVERSE CHARACTERISTICS

