



MOTORSTART CAPACITOR IN
DOUBLE CAN

SKRINK SLEEVEE

IN SULATED

■ FEATURES

- With cap and connecting cable or plug in tags
- With clamp attachment or mounting stud
- Cable outcoming radial or axial
- VDE approval for selected products

■ APPLICATIONS

- Motorstart
- Whitegood motorcontrol

RoHS compliant
REACH compliant


■ GENERAL SPECIFICATIONS

Items	Characteristics
Clima category	10/060/21
Tolerance	±10%
Specs. for selected items	VDE DIN EN 60252-2
Content of supply	If mounting stud then with fixing nut
Terminals	Cap and cable or faston tags 4,8 mm, 6,3 mm single and double
The alternated current load may occur at most 20 times per hour with the following values:	
Percentage duty cycle	Ripple current loading
AB 0,55 % ED	20 turn-ons with each 1,0 sec duration
AB 1,50 % ED	20 turn-ons with each 2,7 sec duration
AB 1,70 % ED	20 turn-ons with each 3,0 sec duration

Different voltages and capacitance combinations are available on request. Also in small lots.

Stand: 05/2015

■ DRAWINGS FOR SERIES MEK

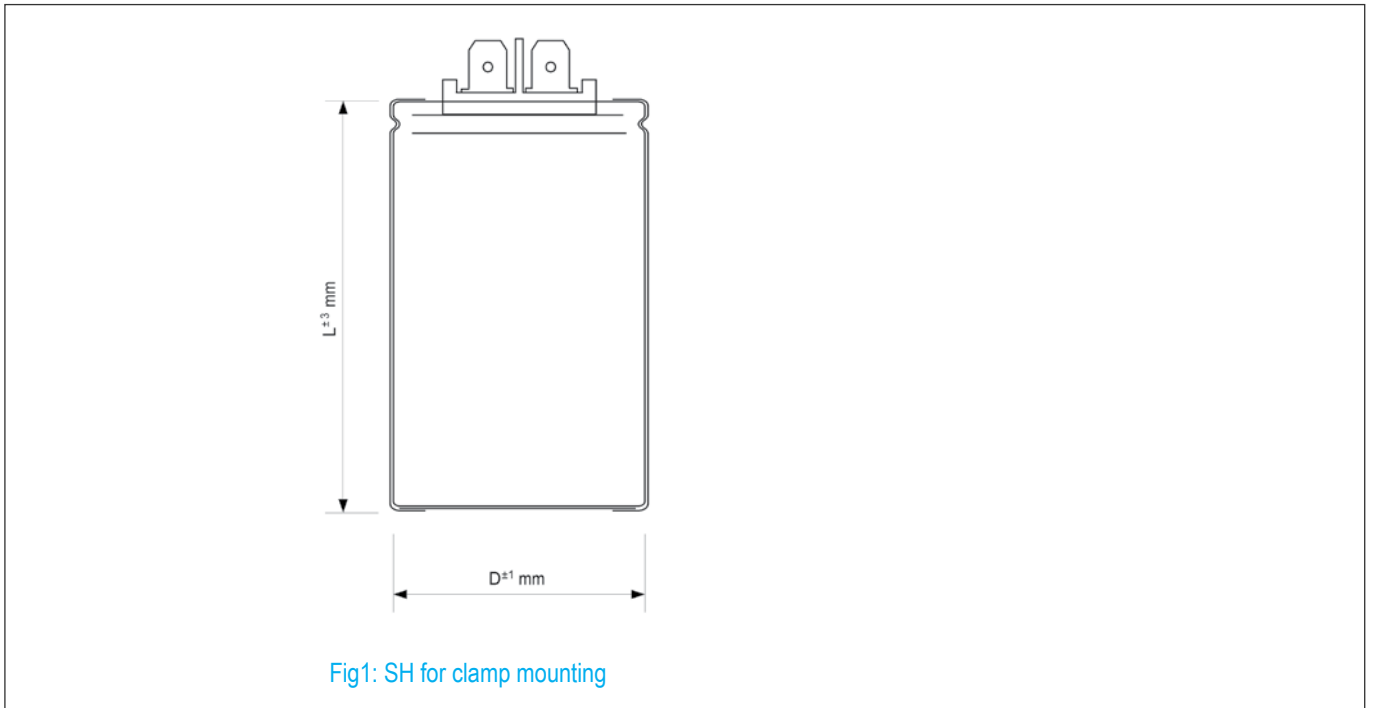

■ STANDARD VALUES TYPE MEK

$U_R \sim$ 50-60 Hz [V]	C_R [μ F]	DC @50 Hz [%]	DC @60 Hz [%]	Dx L [mm]	VDE sign	Order code MEK...
320 V ~	10	1,70	1,36	35x51 / 70	yes	10032035051
	15	1,70	1,36	35x66 / 85	yes	15032035066
	20	1,70	1,36	35x66 / 85	yes	20032035066
	25	1,70	1,36	35x66 / 85	yes	25032035066
	30	1,70	1,36	35x66 / 85	yes	30032035066
	40	1,70	1,36	35x66 / 85	yes	40032035066
	50	1,70	1,36	35x66 / 85	yes	50032035066
	60	1,70	1,36	35x66 / 85	yes	60032035066
	70	1,70	1,36	35x66 / 85	yes	70032035066
	80	1,70	1,36	40x66 / 85	yes	80032040066
	90	1,70	1,36	40x66 / 85	yes	90032040066
	100	1,70	1,36	40x66 / 85	yes	10132040066
	125	1,70	1,36	50x66 / 112	yes	12132050066
	140	1,70	1,36	50x96 / 112	-	14132050096
	160	1,70	1,36	50x96 / 112	-	16132050096
	180	1,70	1,36	50x96 / 112	-	18132050096
200	1,70	1,36	50x96 / 112	-	20132050096	

■ SPECIAL VALUES TYPE MEK

$U_R \sim$ 50-60 Hz [V]	C_R [μ F]	DC @50 Hz [%]	Dx L [mm]	VDE sign	Order code MEK...
320 V ~	95	0,60	35 x 66	-	95032035066
250 V ~	220	0,60	35 x 66	-	22125035076

Please state additionally to your order:

- cable length (normal: 300mm)
- with or without discharge resistor (22/47/100k Ω)
- with or without cap