





MBG




定格一覧表
Fuse List

品名 Catalog No.		認可規格 Agency Approvals							
型名 Type No.	定格電圧 Voltage Rating	定格電流 Ampere Rating	PSE	UL	CSA	BSI	SEIKO	VDE	RoHS
MBG	125V / 250V	1A	○						◎
		1.5A	○						◎
		2A	○						◎
		3A	○						◎
		4A	○						◎
		5A	○						◎
		6A	○						◎
		7A	○						◎
		8A	○						◎
10A	○						◎		

溶断特性表

Time-current characteristic curve

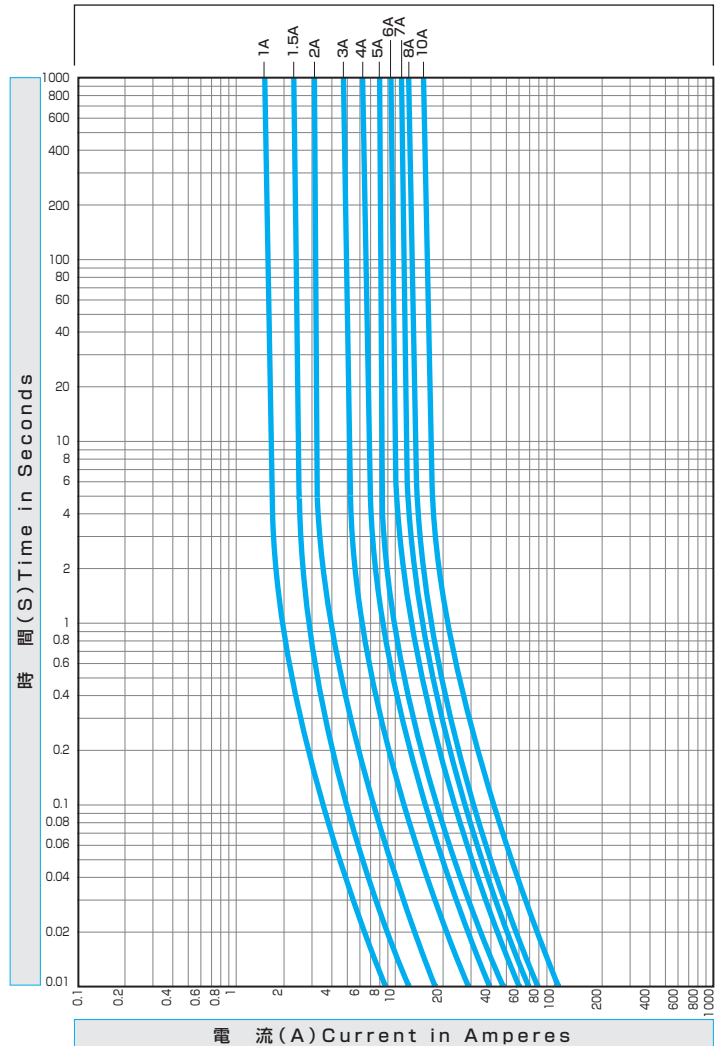

最小包装数
Minimum Package

MBG: 250 Pcs. MBG-R: 200 Pcs. MBG-F21: 500 Pcs.

電気的特性
Electrical Characteristics

B種
Type B

温度上昇 : 115% 100°C以下
Temperature Rise : 115% 100°C Max.

通電 : 130%
Carrying Capacity : 130%

溶断 : 160% 60分以内
Clearing Time-Current : 160% 60Minutes Max.

200% 2分以内
200% 2Minutes Max.

リード線径
Diameter of Lead Wire

MBG:	1A~10A	φ0.8
	10A~	φ1.0

MBG アプリケーション

Applications

ホルダータイプ Type of Holders	品名 Catalog No.	詳細 details
パネル取付型 Panel type	—	—
パネル取付型 Panel type	—	—
ブロック Fuse Block	—	—
クリップ Fuse Clip	—	—
中継用 In-Line Fuse Holders	—	—
中継用ボタンコンタクト Connector for In-Line Fuse Holders	—	—