

CONTENTS

I - OVERVIEW

COMPANY PROFILE.....	P.2
FUZETEC™ PRODUCT FAMILY.....	P.2
SAFETY, QUALITY AND CUSTOMER SATISFACTION.....	P.2
TECHNOLOGY NICHE.....	P.2

II - FUNDAMENTAL

HOW DOES THE RESETTABLE FUSE WORK.....	P.3
TRIP CURRENT, HOLD CURRENT AND THERMAL DERATING.....	P.3

III - PRODUCT

PRODUCT SUMMARY.....	P.4-P.6
GLOSSARY.....	P.6
FRX.....	P.7-P.9
FRX90V.....	P.10-P.12
FRU.....	P.13-P.15
FRT.....	P.16-P.17
FUSB	P.18-P.20
FRG.....	P.21-P.23
FHT	P.24-P.26
FRHV.....	P.27-P.29
FRVL.....	P.30-P.32
FRV.....	P.33-P.35
FSMD2920.....	P.36-P.37
FSMD1812.....	P.38-P.40
FSMD1210.....	P.41-P.42
FSMD1206.....	P.43-P.45
FSMD0805.....	P.46-P.47
FSMD0603.....	P.48-P.49
STRAP SERIES.....	P.50-P.53
Low Rho INTRODUCTION AND HIGHLIGHT.....	P.54
Low Rho FSMD1812.....	P.55-P.56
Low Rho FSMD1210.....	P.57-P.58
Low Rho FSMD1206.....	P.59-P.60
Low Rho FSMD0805.....	P.61-P.62
Low Rho FSMD0603.....	P.63-P.64
Low Rho FSMD0402.....	P.65-P.66
Low Rho STRAP FSL.....	P.67-P.68

IV - APPENDIX

CROSS REFERENCE.....	P.69-P.74
THERMAL DERATING.....	P.75
SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS.....	P.76
FUZETEC PPTC RESETTABLE FUSES TECHNOLOGY.....	P.77
QUICK SELECTION GUIDE.....	P.78



FUZETEC

INDEX


FUZETEC TECHNOLOGY

Founded in 1997, as a world leading device manufacturer and designer, Fuzetec Technology Co., Ltd. (FUZETEC™) is committed to provide continuous circuit protection solutions to today's and tomorrow's electronic and electrical industries.

With the most advanced Positive Temperature Coefficient (PTC) conductive polymer technologies, FUZETEC™ offers a wide variety of Polymeric PTC resettable fuses to fulfill the needs of modern demanding high-tech applications. They include, but are not limited to: Telecommunications, Networks, Smart Phone, Tablet PC's, Notebook PC's, Computers & Peripherals, Automotives, Instrumentation & Industrial Controls, Power Supplies, Consumer Electronics and Primary & Secondary Batteries etc.

FUZETEC™ PRODUCT FAMILY

FUZETEC™ product families are designed for global demanding electronic and electrical industries. Its resettable feature, compact size, flexible design construction, low thermal output and competitive cost out performed the traditional fuse, Ceramic PTC, Bimetal fuse and Current control IC. They are ideal for wide range voltage DC and AC applications. FUZETEC™ resettable fuses (PTC Thermistor, PTC VARIABLE RESISTER, Variable Resistance PTC Thermistor, Variable Resistor, Current Limiter) are offered in a variety of constructions, which include: Radial Leaded (6V, 16V, 30V, 60V, 90V, 120V_{AC}, 240V_{AC}, 250V & 600V), Surface Mount (0402, 0603, 0805, 1206, 1210, 1812 & 2920 sizes) and Axial Leaded (for all battery pack applications and others). In addition to standard products, FUZETEC™ also offers a variety range of custom design devices (i.e. Disc Type).

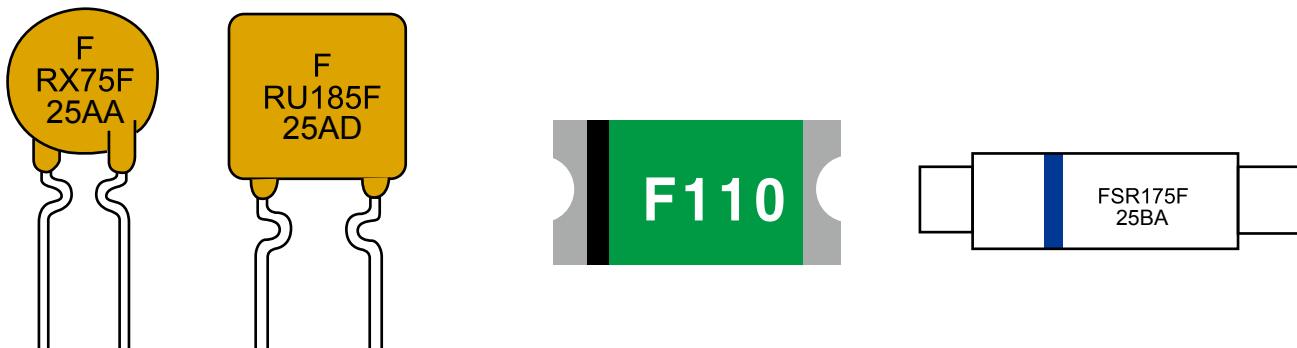

SAFETY, QUALITY AND CUSTOMER SATISFACTION


With third party approvals (UL, C-UL and TÜV), FUZETEC™ products are ensured to provide long lasting safety and performance. From product design and development, through manufacturing and quality control to delivery and shipment, Fuzetec Technology strictly implements **ISO/TS16949:2009**, **ISO9001:2008** and **ISO14001:2004** quality standards to assure its products' quality and consistency. With continuous improvement, we are committed to provide top products and services to better satisfy our customers' needs. We strongly believe that excellent partnership between customers and us are the best and the only route to achieve success in tomorrow's competing business world.

TECHNOLOGY NICHE

Polymeric PTC material and devices technology synergistically integrate the advanced polymer material technologies, conductive material science, novel processing engineering, and fundamental electronic and electrical theory. Electrical resistance of such material and devices increases with temperature increases and vice versa. When experiencing "overcurrent and/or over voltage", the device generates thermal energy (**Energy = I*V**) and heats up itself. This makes the polymer matrix's morphology change from crystalline to amorphous phase, and results in a resistance increase of thousand orders of magnitude such that "trips" the electricity. The device will remain hot and stay "tripped" until the fault is cleared and power is removed.


HOW DOES THE RESETTABLE FUSE WORK

FUZETEC™ resettable fuses are designed and made of patented novel polymeric PTC material in thin chip form, developed solely by FUZETEC™. With electrodes and leads attached on both sides, it is placed in series to protect a circuit. At “normal operating condition” the device remains at an extremely low resistance (milli-ohms) and allows the electrical current to flow through it without any restriction. When overcurrent conditions occur, the polymeric PTC material heats up and its resistance increases sharply. Such a sharp resistance increase (to an insulated status) cuts off the current in the circuit, and consequently protects the element and device in the circuit. Upon fault current being removed, the resettable fuse cools and its resistance drops to the original extremely low value. The resettable fuse is “reset” and allows the current flow through the circuit again.

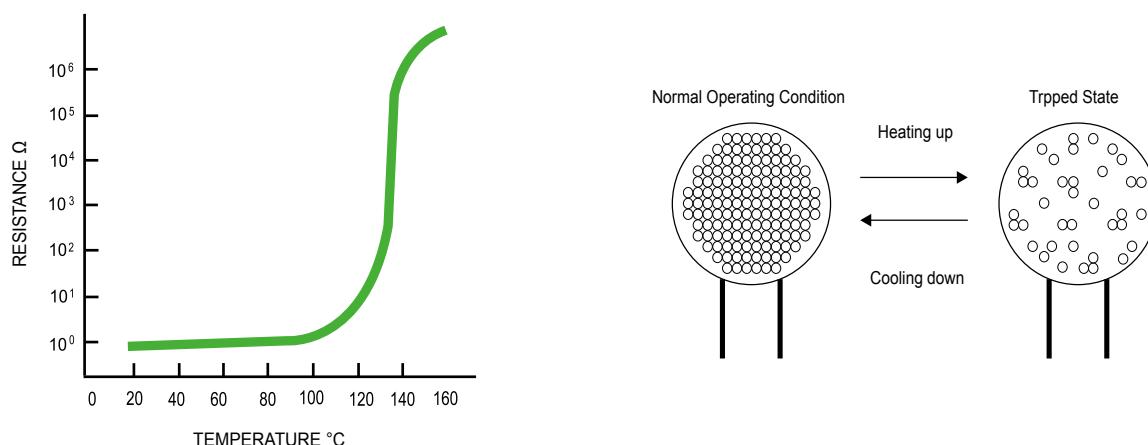

TRIP CURRENT, HOLD CURRENT AND THERMAL DERATING








Trip Current (I_T) and Hold Current (I_H) of FUZETEC™ resettable fuse are rated at 23°C. Typically its Trip Current is twice as much as its Hold Current. FUZETEC™ device does not trip at or below its rated Hold Current, and will trip at or above its Trip Current value. However, due to PTC effect both I_T and I_H reduce with ambient temperature increase and vice versa. As shown below, the currents are reduced nearly 50% at 85°C and increased to 150% at -40°C.

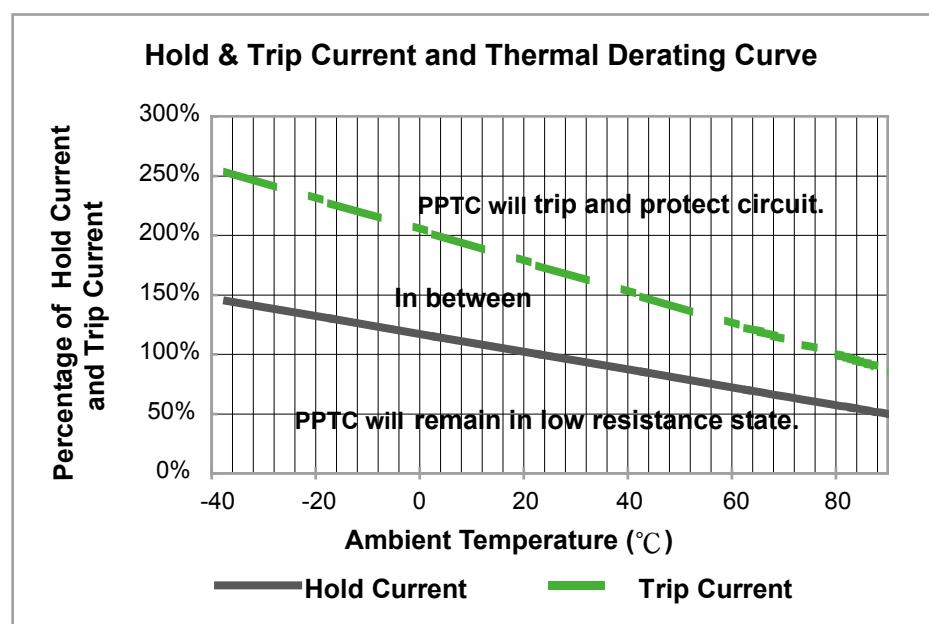

PRODUCT SUMMARY

Radial Leaded (For Telecom & Electronic Equipment)



	<p><u>FRX</u></p> <p>Operation Current: 0.05A ~3.75A V_{MAX}: 60V_{DC}, I_{MAX}: 40A Wide Variety of Electronic Equipment</p>		<p><u>FRU</u></p> <p>Operation Current: 0.90A ~9.00A V_{MAX}: 30V_{DC}, I_{MAX}: 100A Wide Variety of Electronic Equipment</p>
	<p><u>FRX90V</u></p> <p>Operation Current: 0.10A ~3.75A V_{MAX}: 72V_{DC}/90V_{DC}, I_{MAX}: 40A Wide Variety of Electronic Equipment</p>		<p><u>FRG</u></p> <p>Operation Current: 2.50A~14.00A V_{MAX}: 16V_{DC}, I_{MAX}: 100A Wide Variety of Electronic Equipment</p>
	<p><u>FRT</u></p> <p>Operation Current: 0.50A ~2.50A V_{MAX}: 36V_{DC}, I_{MAX}: 40A IEEE1394 Firewire & Consumer Electronics</p>		<p><u>FUSB</u></p> <p>Operation Current: 0.75A~2.50A V_{MAX}: 16V_{DC}/30V_{DC}, I_{MAX}: 40A Low Voltage USB Equipment</p>
	<p><u>FHT</u></p> <p>Operation Current: 0.50A~15.00A V_{MAX}: 16V_{DC}/30V_{DC}, I_{MAX}: 40A~100A Wide operating temperatures up to 125°C</p>		<p><u>FRVL</u></p> <p>Operation Current: 0.10A ~3.75A V_{MAX}: 120V_{AC/DC}, I_{MAX}: 2A~20A Max Interrupt Voltage: 135V_{AC/DC} Line Voltage Application</p>
	<p><u>FRHV</u></p> <p>Operation Current: 0.08A~0.40A V_{MAX}: 60V_{DC}/100V_{DC}/250V_{DC}, I_{MAX}: 3A~10A Max Interrupt Voltageb: 250/600V_{AC} Telecommunication and Network</p>		<p><u>FRV</u></p> <p>Operation Current: 0.05A~2.00A V_{MAX}: 240V_{AC/DC}, I_{MAX}: 1A~20A Max Interrupt Voltage: 265V_{AC/DC} Line Voltage Application</p>

III - PRODUCT

PRODUCT SUMMARY

Surface Mount (For High Density Board)

	<p>FSMD2920 Operation Current: 0.30A ~3.00A V_{MAX}: 6V_{DC}~60V_{DC}, I_{MAX}: 100A All High-Density Board</p>		<p>FSMD1812 Operation Current: 0.10A ~3.00A V_{MAX}: 6V_{DC}~60V_{DC}, I_{MAX}: 100A All High-Density Board</p>
	<p>FSMD1210 Operation Current: 0.05A ~2.00A V_{MAX}: 6V_{DC}~60V_{DC}, I_{MAX}: 100A All High-Density Board</p>		<p>FSMD1206 Operation Current: 0.05A ~2.00A V_{MAX}: 6V_{DC}~60V_{DC}, I_{MAX}: 100A All High-Density Board</p>
	<p>FSMD0805 Operation Current: 0.10A~1.00A V_{MAX}: 6V_{DC}~15V_{DC}, I_{MAX}: 100A All High-Density Board</p>		<p>FSMD0603 Operation Current: 0.01A ~0.20A V_{MAX}: 9V_{DC}~60V_{DC}, I_{MAX}: 40A All High-Density Board</p>

Axial Leaded (For Rechargeable Battery Packs)

	<p>FVL Operation Current: 1.70A~2.30 A V_{MAX}: 12V_{DC}, I_{MAX}: 100A Rechargeable Battery Packs, Lithium Cell and Battery Packs</p>		<p>FVT Operation Current: 1.10A~2.40 A V_{MAX}: 16V_{DC}, I_{MAX}: 100A Rechargeable Battery Packs, Lithium Cell and Battery Packs</p>
	<p>FSR Operation Current: 1.20A~4.20 A V_{MAX}: 15V_{DC}/30V_{DC}, I_{MAX}: 100A Rechargeable Battery Packs</p>		<p>FLR Operation Current: 1.90A~7.30 A V_{MAX}: 15V_{DC}/20V_{DC}, I_{MAX}: 100A Rechargeable Battery Packs</p>

Chip & Disc type (For Motor Protection)

	<p>Chip & Disc Custom Design Battery Cell and Charger Motor Protection</p>
---	---

III - PRODUCT



PRODUCT SUMMARY – Low Rho PPTC RESETTABLE FUSE

Low Rho Surface Mount (For High Density Board)

   	<p><u>Low Rho FSMD1812</u> Operation Current: 1.40A ~6.00A V_{MAX}: 6V_{DC}, I_{MAX}: 100A All High-Density Board</p>	  	<p><u>Low Rho FSMD1210</u> Operation Current: 1.75A ~6.50A V_{MAX}: 6V_{DC}, I_{MAX}: 100A All High-Density Board</p>
  	<p><u>Low Rho FSMD1206</u> Operation Current: 0.50A ~6.00A V_{MAX}: 6V_{DC}, I_{MAX}: 100A All High-Density Board</p>	   	<p><u>Low Rho FSMD0805</u> Operation Current: 0.75A~2.00A V_{MAX}: 6V_{DC}, I_{MAX}: 100A All High-Density Board</p>
   	<p><u>Low Rho FSMD0603</u> Operation Current: 0.25A ~1.00A V_{MAX}: 6V_{DC}~9V_{DC}, I_{MAX}: 100A All High-Density Board</p>	   	<p><u>Low Rho FSMD0402</u> Operation Current: 0.10A~0.50 A V_{MAX}: 6V_{DC}, I_{MAX}: 100A All High-Density Board</p>

Low Rho Axial Leaded (For Rechargeable Battery Packs)

	<p><u>Low Rho Strap FSL</u> Operation Current: 1.40A ~7.00A V_{MAX}: 6V_{DC}, I_{MAX}: 50A Rechargeable Battery Packs, Lithium cell and Barttary Packs protection, especially for Smart Phone and Tablet PC.</p>
---	---

GLOSSARY


- I_H : Hold Current - Maximum current at which the device will not trip at 23°C still air.
- I_T : Trip Current - Minimum current at which the device will always trip at 23°C still air.
- V_{MAX} : Maximum voltage device can withstand without damage at its rated current.
- I_{MAX} : Maximum fault current device can withstand without damage at rated voltage (V_{MAX}).
- P_d : Maximum power dissipated from device when in tripped state in 23°C still air environment.
- R_{MIN} : Minimum device resistance at 23°C.
- R_{MAX} : Maximum device resistance at 23°C.
- R_{1MAX} : 1) Maximum resistance of device at 23°C measured 1 hour, after tripping for all product series;
2) or after REFLOW soldering of 260°C for 20 seconds for all SMD series;
3) or after WAVE soldering of 260°C for less than 5 seconds for all DIP series.
Special Note : - In the event that TWO of the above three conditions were experienced once each, the acceptance criteria will become 1.3 times of R_{1MAX}.
- In the event that ALL of the above three conditions were experienced once each, the acceptance criteria will become 1.5 times of R_{1MAX}.

RoHS

HF

Halogen Free

FRX Series

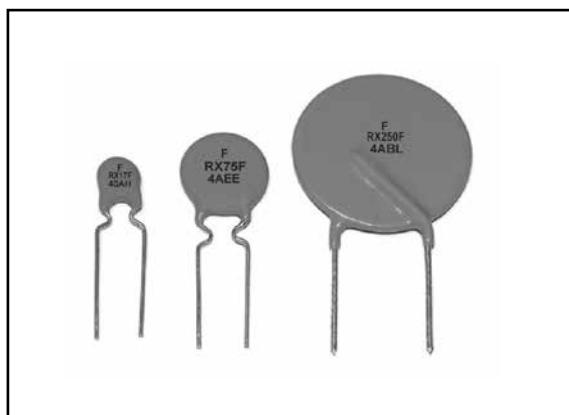

RoHS Compliant & Lead Free



Application : Wide variety of electronic equipment

Product Features : Low hold current, Solid state
Radial-leaded product ideal for up to 60V_{DC}

Operation Current : 0.05A ~ 3.75A

Maximum Voltage : 60V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL(E211981)

C-UL(E211981)

TÜV (R50004084)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
	I _H , A	I _T , A	at 5xI _H , s	I _{MAX} , A	V _{MAX} , V _{DC}	P _d , W	R _{MIN}	R _{1MAX}
FRX005-60F	0.05	0.10	5.0	40	60	0.26	7.30	20.00
FRX010-60F	0.10	0.20	4.0	40	60	0.38	2.50	7.50
FRX017-60F	0.17	0.34	3.0	40	60	0.48	2.00	8.00
FRX020-60F	0.20	0.40	2.2	40	60	0.41	1.83	4.40
FRX025-60F	0.25	0.50	2.5	40	60	0.45	1.25	3.00
FRX030-60F	0.30	0.60	3.0	40	60	0.49	0.88	2.10
FRX040-60F	0.40	0.80	3.8	40	60	0.56	0.55	1.29
FRX050-60F	0.50	1.00	4.0	40	60	0.77	0.50	1.17
FRX065-60F	0.65	1.30	5.3	40	60	0.88	0.31	0.72
FRX075-60F	0.75	1.50	6.3	40	60	0.92	0.25	0.60
FRX090-60F	0.90	1.80	7.2	40	60	0.99	0.20	0.47
FRX110-60F	1.10	2.20	8.2	40	60	1.50	0.15	0.38
FRX135-60F	1.35	2.70	9.6	40	60	1.70	0.12	0.30
FRX160-60F	1.60	3.20	11.4	40	60	1.90	0.09	0.22
FRX185-60F	1.85	3.70	12.6	40	60	2.10	0.08	0.19
FRX250-60F	2.50	5.00	15.6	40	60	2.50	0.05	0.13
FRX300-60F	3.00	6.00	19.8	40	60	2.80	0.04	0.10
FRX375-60F	3.75	7.50	24.0	40	60	3.20	0.03	0.08

Physical specifications :

Lead material : FRX005-60F~FRX090-60F Tin plated copper, 24 AWG.

FRX110-60F~FRX375-60F Tin plated copper, 20 AWG.

Soldering characteristics : MIL-STD-202, Method 208E.

Insulating coating : Flame retardant epoxy, meets UL-94V-0 requirement.

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	158%	138%	119%	100%	90%	81%	70%	60%	50%	36%

III - Product - Radial Leaded PTC

FRX Product Dimensions (mm)

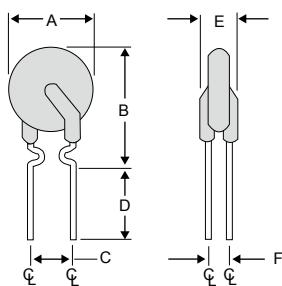


Fig.1
Lead Size : 24AWG
 Φ 0.51 mm Diameter


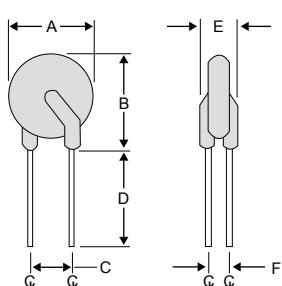


Fig.2
Lead Size : 20AWG
 Φ 0.81 mm Diameter

Part Number	Fig.	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FRX005-60F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX010-60F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX017-60F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX020-60F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX025-60F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX030-60F	1	7.4	13.0	5.1	7.6	3.1	1.1
FRX040-60F	1	7.6	13.5	5.1	7.6	3.1	1.1
FRX050-60F	1	7.9	13.7	5.1	7.6	3.1	1.1
FRX065-60F	1	9.7	14.5	5.1	7.6	3.1	1.1
FRX075-60F	1	10.4	15.2	5.1	7.6	3.1	1.1
FRX090-60F	1	11.7	15.8	5.1	7.6	3.1	1.1
FRX110-60F	2	13.0	18.0	5.1	7.6	3.1	1.4
FRX135-60F	2	14.5	19.6	5.1	7.6	3.1	1.4
FRX160-60F	2	16.3	21.3	5.1	7.6	3.1	1.4
FRX185-60F	2	17.8	22.9	5.1	7.6	3.1	1.4
FRX250-60F	2	21.3	26.4	10.2	7.6	3.1	1.4
FRX300-60F	2	24.9	30.0	10.2	7.6	3.1	1.4
FRX375-60F	2	28.5	33.5	10.2	7.6	3.1	1.4


Typical Time-To-Trip at 23°C

- A = FRX005-60F
- B = FRX010-60F
- C = FRX017-60F
- D = FRX020-60F
- E = FRX025-60F
- F = FRX030-60F
- G = FRX040-60F
- H = FRX050-60F
- I = FRX065-60F
- J = FRX075-60F
- K = FRX090-60F
- L = FRX110-60F
- M = FRX135-60F
- N = FRX160-60F
- O = FRX185-60F
- P = FRX250-60F
- Q = FRX300-60F
- R = FRX375-60F

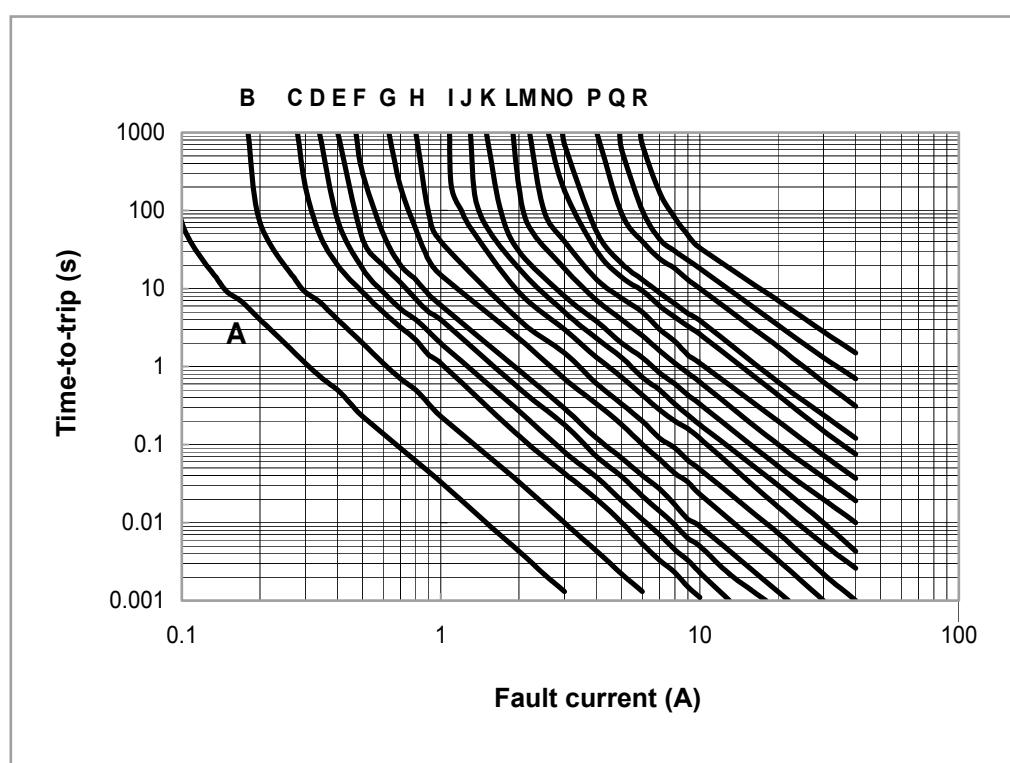



Part Numbering System

FRX □ □ □ — □ □ F

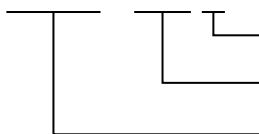

RoHS Compliant/
Lead Free
Voltage Rating
Current Rating

Part Marking System

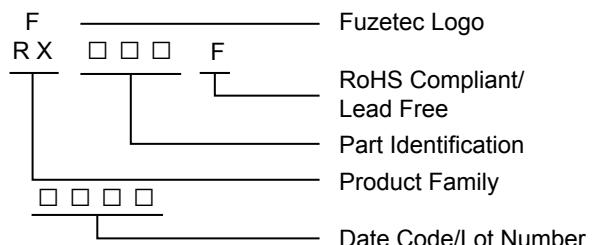

Fuzetec Logo

RoHS Compliant/
Lead Free

Part Identification

Product Family

Date Code/Lot Number

Standard Package

FRX005-60F~FRX050-60F : 500 Pcs/Bag, 3.0K Reel/Tape

FRX065-60F~FRX090-60F : 300 Pcs/Bag, 3.0K Reel/Tape

FRX110-60F : 300 Pcs/Bag, 1.5K Reel/Tape

FRX135-60F~FRX185-60F : 200 Pcs/Bag, 1.5K Reel/Tape


FRX250-60F~FRX375-60F : 100 Pcs/Bag, 1.0K Reel/Tape

Warning :



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

FRX90V Series

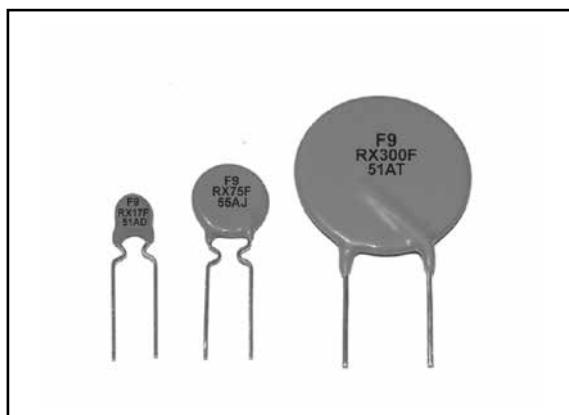

RoHS Compliant & Lead Free



Application : Telecom & wide variety of electronic equipment

Product Features : Low hold current, Solid state, Radial leaded product ideal for up to 90V_{DC}

Operation Current : 0.10A~3.75A

Maximum Voltage : Up to 90V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

C-UL (E211981)

TÜV (R50004084)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
	I _H , A	I _T , A					R _{MIN}	R _{1MAX}
FRX010-90F	0.10	0.20	4.0	40	72/90	0.38	2.50	7.50
FRX015-90F	0.15	0.35	10.0	40	72/90	0.70	2.40	7.00
FRX017-90F	0.17	0.34	3.0	40	72/90	0.48	2.00	8.00
FRX020-90F	0.20	0.40	2.2	40	72/90	0.41	1.83	4.40
FRX025-90F	0.25	0.50	2.5	40	72/90	0.45	1.25	3.00
FRX030-90F	0.30	0.60	3.0	40	72/90	0.49	0.88	2.10
FRX035-90F	0.35	0.75	10.0	40	72/90	1.30	0.70	2.50
FRX040-90F	0.40	0.80	3.8	40	72/90	0.56	0.55	1.29
FRX050-90F	0.50	1.00	4.0	40	72/90	0.77	0.50	1.17
FRX055-90F	0.55	1.20	10.0	40	72/90	1.50	0.40	1.50
FRX065-90F	0.65	1.30	5.3	40	72/90	0.88	0.31	0.72
FRX075-90F	0.75	1.50	6.3	40	72/90	0.92	0.25	0.60
FRX090-90F	0.90	1.80	7.2	40	72/90	0.99	0.20	0.47
FRX110-90F	1.10	2.20	8.2	40	72/90	1.50	0.15	0.38
FRX135-90F	1.35	2.70	9.6	40	72/90	1.70	0.12	0.30
FRX160-90F	1.60	3.20	11.4	40	72/90	1.90	0.09	0.22
FRX185-90F	1.85	3.70	12.6	40	72/90	2.10	0.08	0.19
FRX250-90F	2.50	5.00	15.6	40	72/90	2.50	0.05	0.13
FRX300-90F	3.00	6.00	19.8	40	72/90	2.80	0.04	0.10
FRX375-90F	3.75	7.50	24.0	40	72/90	3.20	0.03	0.08

Physical specifications :

Lead material : FRX10-90F~FRX090-90F Tin plated copper, 24 AWG.

FRX110-90F~FRX375-90F Tin plated copper, 20 AWG.

Soldering characteristics : MIL-STD-202, Method 208E.

Insulating coating : Flame retardant epoxy, meets UL-94V-0 requirement.

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	158%	138%	119%	100%	90%	81%	70%	60%	50%	36%

FRX90V Product Dimensions (mm)

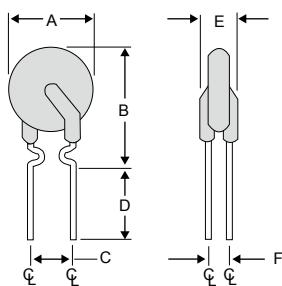


Fig.1
Lead Size : 24AWG
 Φ 0.51 mm Diameter


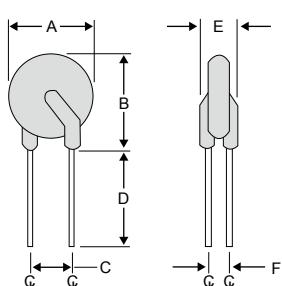


Fig.2
Lead Size : 20AWG
 Φ 0.81 mm Diameter

Part Number	Fig.	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FRX010-90F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX015-90F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX017-90F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX020-90F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX025-90F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX030-90F	1	7.4	13.0	5.1	7.6	3.1	1.1
FRX035-90F	1	7.4	12.7	5.1	7.6	3.1	1.1
FRX040-90F	1	7.6	13.5	5.1	7.6	3.1	1.1
FRX050-90F	1	7.9	13.7	5.1	7.6	3.1	1.1
FRX055-90F	1	9.7	14.0	5.1	7.6	3.1	1.1
FRX065-90F	1	9.7	14.5	5.1	7.6	3.1	1.1
FRX075-90F	1	10.4	15.2	5.1	7.6	3.1	1.1
FRX090-90F	1	11.7	15.8	5.1	7.6	3.1	1.1
FRX110-90F	2	13.0	18.0	5.1	7.6	3.1	1.4
FRX135-90F	2	14.5	19.6	5.1	7.6	3.1	1.4
FRX160-90F	2	16.3	21.3	5.1	7.6	3.1	1.4
FRX185-90F	2	17.8	22.9	5.1	7.6	3.1	1.4
FRX250-90F	2	21.3	26.4	10.2	7.6	3.1	1.4
FRX300-90F	2	24.9	30.0	10.2	7.6	3.1	1.4
FRX375-90F	2	28.5	33.5	10.2	7.6	3.1	1.4


Typical Time-To-Trip at 23°C

- A = FRX010-90F
- B = FRX015-90F
- C = FRX017-90F
- D = FRX020-90F
- E = FRX025-90F
- F = FRX030-90F
- G = FRX035-90F
- H = FRX040-90F
- I = FRX050-90F
- J = FRX055-90F
- K = FRX065-90F
- L = FRX075-90F
- M = FRX090-90F
- N = FRX110-90F
- O = FRX135-90F
- P = FRX160-90F
- Q = FRX185-90F
- R = FRX250-90F
- S = FRX300-90F
- T = FRX375-90F

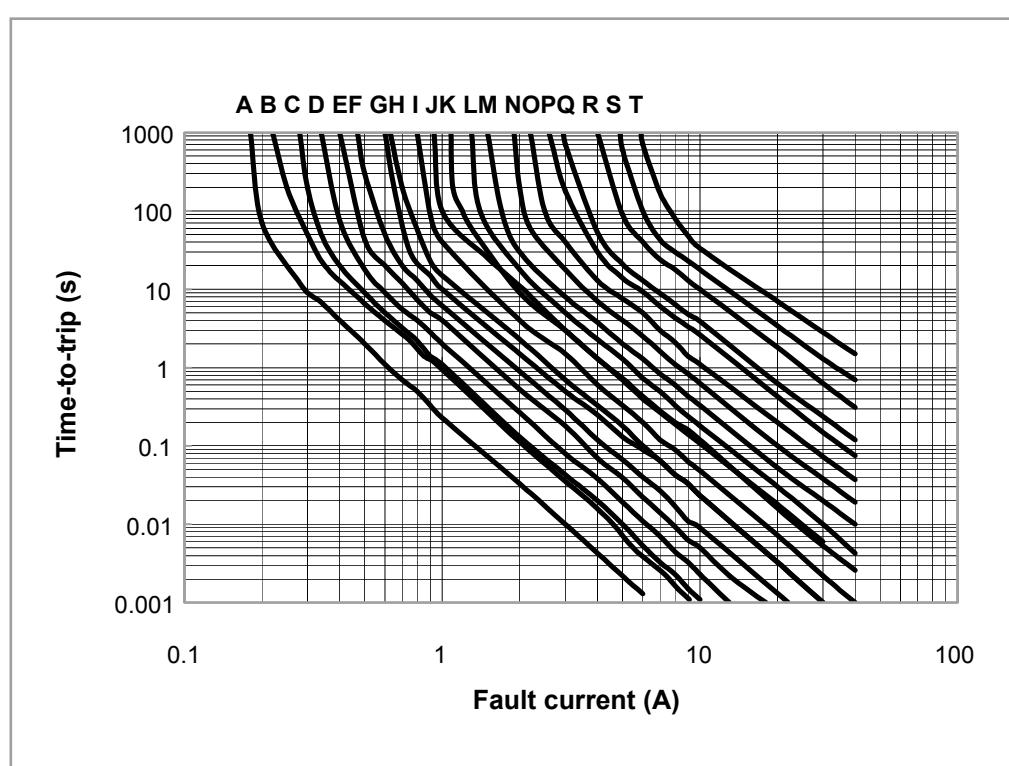



Part Numbering System

F R X □ □ □ — □ □ F

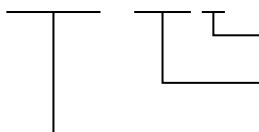

RoHS Compliant/
Lead Free
 Voltage Rating
 Current Rating

Part Marking System

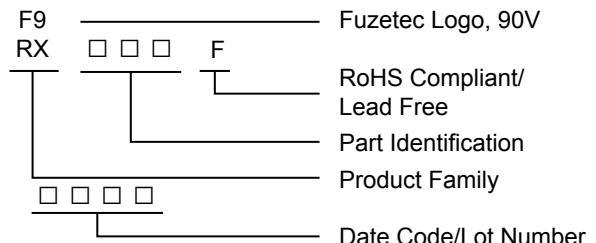

Standard Package

FRX010-90F~FRX055-90F : 500Pcs/Bag, 3.0K Reel/Tape

FRX065-90F~FRX090-90F : 300Pcs/Bag, 3.0K Reel/Tape

FRX110-90F : 300Pcs/Bag, 1.5K Reel/Tape

FRX135-90F~FRX185-90F : 200Pcs/Bag, 1.5K Reel/Tape


FRX250-90F~FRX375-90F : 100Pcs/Bag, 1.0K Reel/Tape

Warning :



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

FRU Series

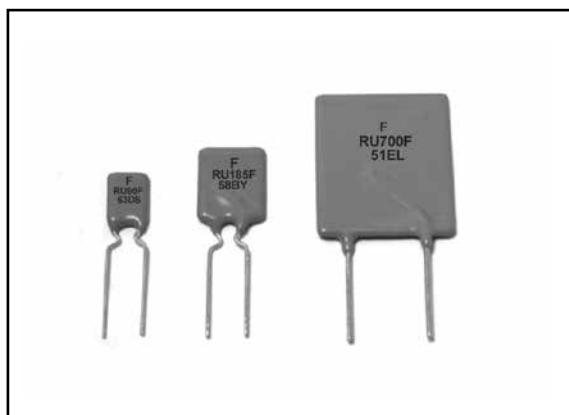

RoHS Compliant & Lead Free



Application : Wide variety of electronic equipment

Product Features : Low resistance, High hold current, Solid state Radial-leaded product ideal for up to 30V_{DC}

Operation Current : 0.9A~9.0A

Maximum Voltage : 30V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL(E211981)

C-UL(E211981)

TÜV (R50004084)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
	I _H , A	I _T , A					R _{MIN}	R _{1MAX}
FRU090-30F	0.90	1.80	5.9	100	30	0.6	0.070	0.220
FRU110-30F	1.10	2.20	6.6	100	30	0.7	0.050	0.170
FRU135-30F	1.35	2.70	7.3	100	30	0.8	0.040	0.130
FRU160-30F	1.60	3.20	8.0	100	30	0.9	0.030	0.110
FRU185-30F	1.85	3.70	8.7	100	30	1.0	0.030	0.090
FRU250-30F	2.50	5.00	10.3	100	30	1.2	0.020	0.070
FRU300-30F	3.00	6.00	10.8	100	30	2.0	0.020	0.080
FRU400-30F	4.00	8.00	12.7	100	30	2.5	0.010	0.050
FRU500-30F	5.00	10.00	14.5	100	30	3.0	0.010	0.050
FRU600-30F	6.00	12.00	16.0	100	30	3.5	0.005	0.040
FRU700-30F	7.00	14.00	17.5	100	30	3.8	0.005	0.030
FRU800-30F	8.00	16.00	18.8	100	30	4.0	0.005	0.020
FRU900-30F	9.00	18.00	20.0	100	30	4.2	0.005	0.020

Physical specifications :

Lead material : FRU090-30F~FRU250-30F Tin plated copper, 24 AWG.

FRU300-30F~FRU900-30F Tin plated copper, 20 AWG.

Soldering characteristics : MIL-STD-202, Method 208E.

Insulating coating : Flame retardant epoxy, meets UL-94V-0 requirement.

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	92%	84%	76%	70%	61%	50%

FRU Product Dimensions (mm)

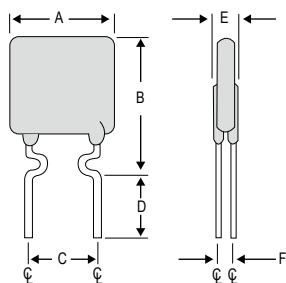


Fig.1
Lead Size : 24AWG
 Φ 0.51 mm Diameter

Part Number	Fig.	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FRU090-30F	1	7.4	12.2	5.1	7.6	3.0	0.9
FRU110-30F	1	7.4	14.2	5.1	7.6	3.0	0.9
FRU135-30F	1	8.9	13.5	5.1	7.6	3.0	0.9
FRU160-30F	1	8.9	15.2	5.1	7.6	3.0	0.9
FRU185-30F	1	10.2	15.7	5.1	7.6	3.0	0.9
FRU250-30F	1	11.4	18.3	5.1	7.6	3.0	0.9
FRU300-30F	2	11.4	17.3	5.1	7.6	3.0	1.2
FRU400-30F	2	14.0	20.1	5.1	7.6	3.0	1.2
FRU500-30F	2	14.0	24.9	10.2	7.6	3.0	1.2
FRU600-30F	2	16.5	24.9	10.2	7.6	3.0	1.2
FRU700-30F	2	19.1	26.7	10.2	7.6	3.0	1.2
FRU800-30F	2	21.6	29.2	10.2	7.6	3.0	1.2
FRU900-30F	2	24.1	29.7	10.2	7.6	3.0	1.2


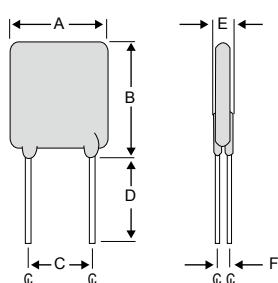


Fig.2
Lead Size : 20AWG
 Φ 0.81 mm Diameter


Typical Time-To-Trip at 23°C

- A = FRU090-30F
- B = FRU110-30F
- C = FRU135-30F
- D = FRU160-30F
- E = FRU185-30F
- F = FRU250-30F
- G = FRU300-30F
- H = FRU400-30F
- I = FRU500-30F
- J = FRU600-30F
- K = FRU700-30F
- L = FRU800-30F
- M = FRU900-30F

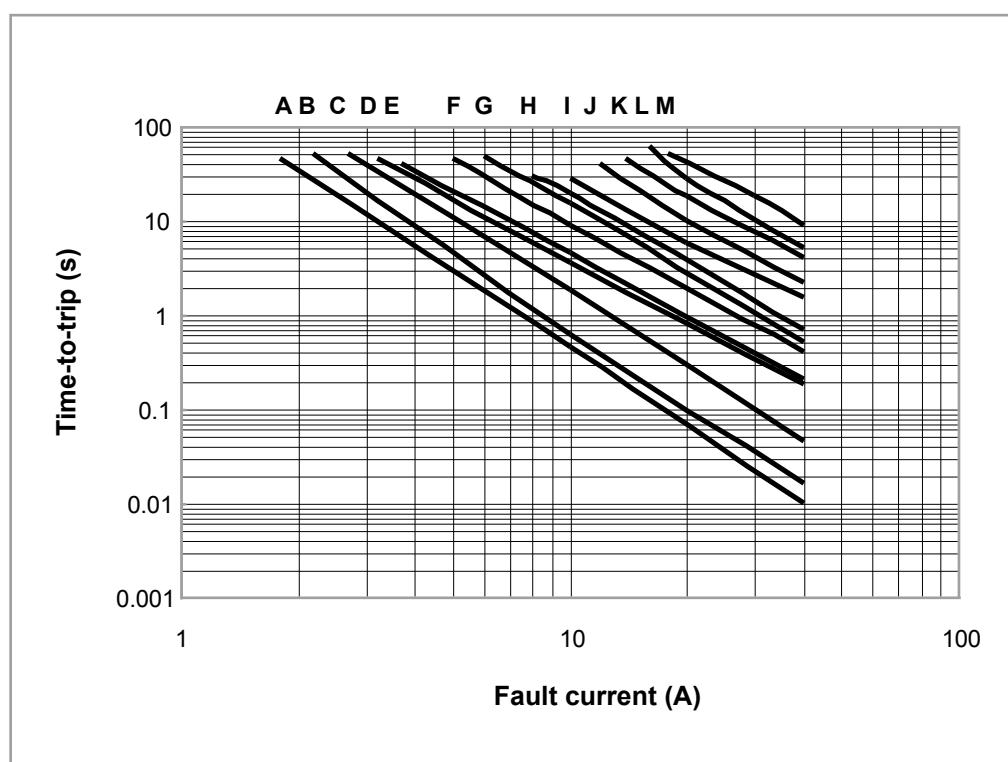

Part Numbering System

F R U □ □ □ — □ □ F

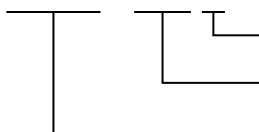


RoHS Compliant/
Lead Free
Voltage Rating
Current Rating

Part Marking System



Example

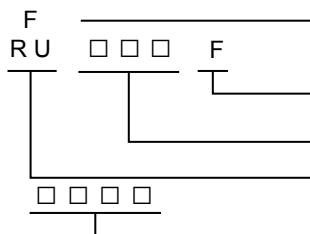

Fuzetec Logo

RoHS Compliant/
Lead Free

Part Identification

Product Family
Date Code/Lot Number

Standard Package

FRU090-30F~FRU110-30F : 500 Pcs/Bag, 3.0K Reel/Tape

FRU135-30F~FRU250-30F : 300 Pcs/Bag, 3.0K Reel/Tape

FRU300-30F~FRU400-30F : 200 Pcs/Bag, 1.5K Reel/Tape

FRU500-30F : 200 Pcs/Bag, 1.0K Reel/Tape


FRU600-30F~FRU900-30F : 100 Pcs/Bag

Warning :



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

FRT Series

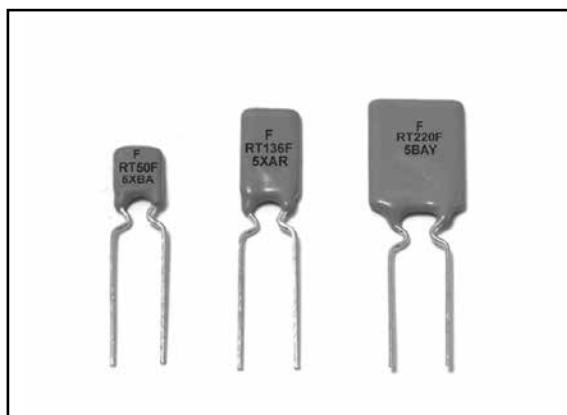

RoHS Compliant & Lead Free



Application : IEEE 1394 Firewire, Computers & Consumer electronics

Product Features : Fast trip time, Lower Trip-to-hold Ratio, Radial-leaded product ideal for up to 36V_{DC}

Operation Current : 0.5A~2.5A

Maximum Voltage : 36V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL(E211981)

C-UL(E211981)

TÜV (R50004084)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip at 5xI _H , S	Max. Current I _{MAX} , A	Rated Voltage V _{MAX} , V _{DC}	Typ. Power Pd, W	Resistance	
	I _H , A	I _T , A					R _{MIN}	R _{1MAX}
FRT050-33F	0.50	1.00	5.0	40	36	0.67	0.140	0.448
FRT075-33F	0.75	1.50	4.0	40	36	0.71	0.115	0.368
FRT090-33F	0.90	1.80	3.5	40	36	0.74	0.090	0.288
FRT120-33F	1.20	2.30	3.5	40	36	0.78	0.074	0.180
FRT135-33F	1.35	2.50	4.5	40	36	0.84	0.059	0.143
FRT160-33F	1.60	2.75	4.5	40	36	0.86	0.041	0.131
FRT190-33F	1.90	3.00	3.5	40	36	0.90	0.045	0.092
FRT220-33F	2.20	3.50	6.5	40	36	0.95	0.025	0.080
FRT250-33F	2.50	4.00	8.0	40	36	0.99	0.020	0.064

Physical specifications :

Lead material : Tin plated copper, 24 AWG.


Soldering characteristics : MIL-STD-202, Method 208E.

Insulating coating : Flame retardant epoxy, meets UL-94-V-0 requirement.

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	148%	134%	120%	100%	98%	90%	84%	78%	70%	59%

FRT Product Dimensions (mm)

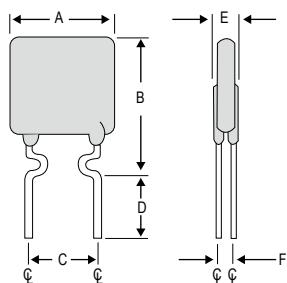


Lead Size : 24AWG
Φ 0.51 mm Diameter

Part Number	A	B	C	D	E	F
	Max.	Max.	Typ.	Min.	Max.	Typ.
FRT050-33F	7.4	12.2	5.1	7.6	3.0	1.1
FRT075-33F	7.4	12.2	5.1	7.6	3.0	1.1
FRT090-33F	7.4	12.2	5.1	7.6	3.0	1.1
FRT120-33F	7.4	12.2	5.1	7.6	3.0	1.1
FRT135-33F	7.4	14.2	5.1	7.6	3.0	1.1
FRT160-33F	7.4	14.0	5.1	7.6	3.0	1.1
FRT190-33F	9.0	13.5	5.1	7.6	3.0	1.1
FRT220-33F	10.0	17.0	5.1	7.6	3.0	1.1
FRT250-33F	10.0	19.5	5.1	7.6	3.0	1.1


Typical Time-To-Trip at 23°C

A = FRT050-33F
B = FRT075-33F
C = FRT090-33F
D = FRT120-33F
E = FRT135-33F
F = FRT160-33F
G = FRT190-33F
H = FRT220-33F
I = FRT250-33F

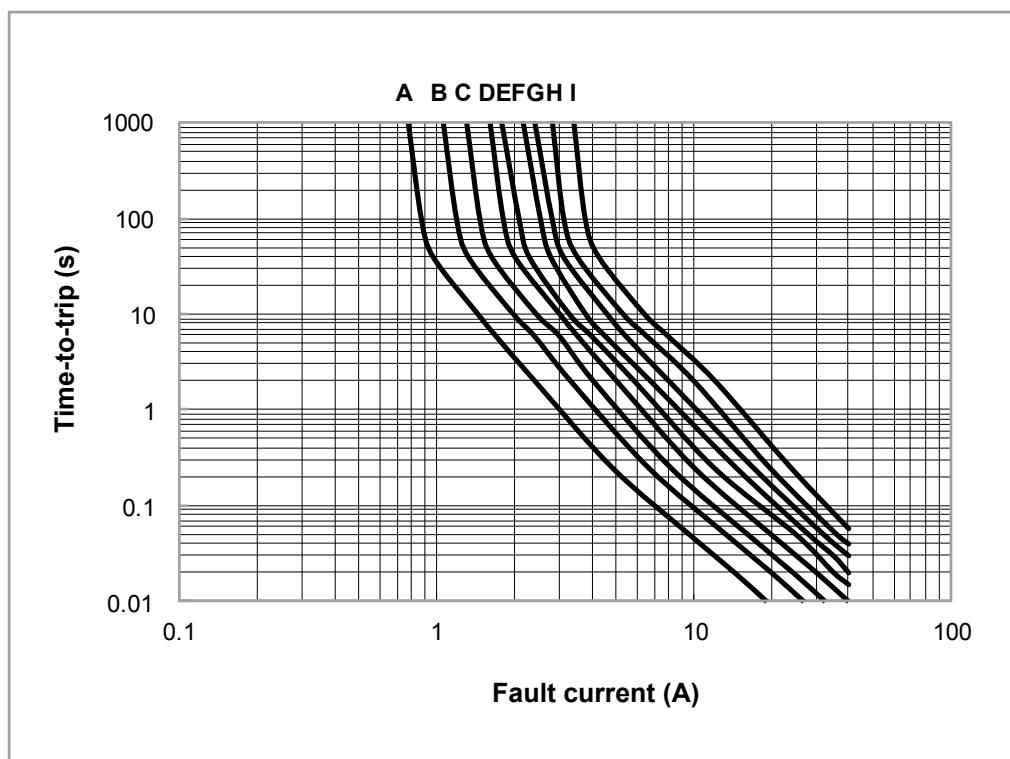


Part Numbering System

F R T □ □ □ - □ □ F

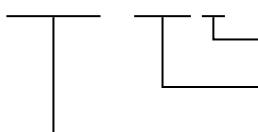


RoHS Compliant/
 Lead Free
 Voltage Rating
 Current Rating

Part Marking System



Example

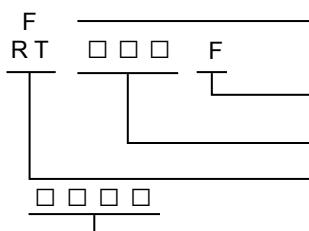

Fuzetec Logo

RoHS Compliant/
 Lead Free

Part Identification

Product Family

Date Code/Lot Number

Standard Package


FRT050-33F~FRT250-33F : 500 Pcs/Bag, 3.0K Reel/Tape

Warning :



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

FUSB Series

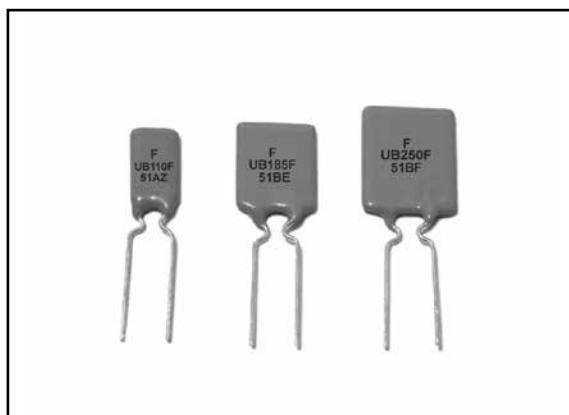

RoHS Compliant & Lead Free



Application : Low voltage USB equipment

Product Features : Low resistance, Fast trip time, Lower Trip-to-hold Ratio

Operation Current : 0.75A ~2.50A

Maximum Voltage : 16V/30V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL(E211981)

C-UL(E211981)

TÜV (R50004084)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip		Max. Current	Rated Voltage	Typ. Power	Resistance	
			Current	Sec				R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	A	Sec	I _{MAX} , A	V _{MAX} , V _{DC}	Pd, W	Ohms	Ohms
FUSB075F	0.75	1.30	8.0	0.4	40	16	0.3	0.08	0.23
FUSB090F	0.90	1.80	8.0	1.2	40	16/30	0.6	0.07	0.18
FUSB110F	1.10	2.20	8.0	2.3	40	16/30	0.7	0.05	0.14
FUSB120F	1.20	2.00	8.0	0.7	40	16	0.6	0.04	0.14
FUSB135F	1.35	2.70	8.0	4.5	40	16/30	0.8	0.04	0.12
FUSB155F	1.55	2.70	7.8	2.2	40	16	0.7	0.03	0.12
FUSB160F	1.60	3.20	8.0	9.0	40	16/30	0.9	0.03	0.11
FUSB185F	1.85	3.70	8.0	10.0	40	16/30	1.0	0.03	0.09
FUSB250F	2.50	5.00	8.0	40.0	40	16/30	1.2	0.02	0.07

Physical specifications :

Lead material : Tin plated copper, 24 AWG.

Soldering characteristics : MIL-STD-202, Method 208E.

Insulating coating : Flame retardant epoxy polymer, meets UL-94V-0 requirement.

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	91%	83%	78%	70%	61%	50%

FUSB Product Dimensions (mm)

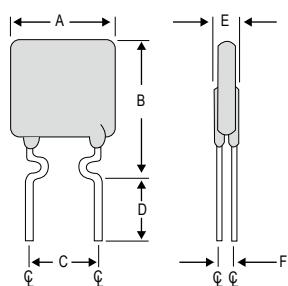


Fig.1
Lead Size : 24AWG
 Φ 0.51 mm Diameter


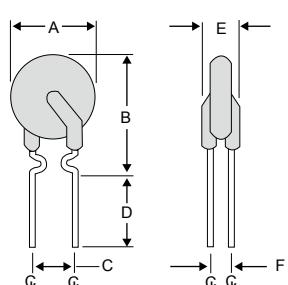


Fig.2
Lead Size : 24AWG
 Φ 0.51 mm Diameter


Part Number	Fig.	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FUSB075F	2	6.9	11.4	5.1	7.6	3.0	0.8
FUSB090F	1	7.4	12.2	5.1	7.6	3.0	0.8
FUSB110F	1	7.4	14.2	5.1	7.6	3.0	0.8
FUSB120F	2	6.9	11.7	5.1	7.6	3.0	0.8
FUSB135F	1	8.9	13.5	5.1	7.6	3.0	0.8
FUSB155F	2	6.9	11.7	5.1	7.6	3.0	0.8
FUSB160F	1	8.9	15.2	5.1	7.6	3.0	0.8
FUSB185F	1	10.2	15.7	5.1	7.6	3.0	0.8
FUSB250F	1	11.4	18.3	5.1	7.6	3.0	0.8

Typical Time-To-Trip at 23°C


A = FUSB075F
B = FUSB120F
C = FUSB155F

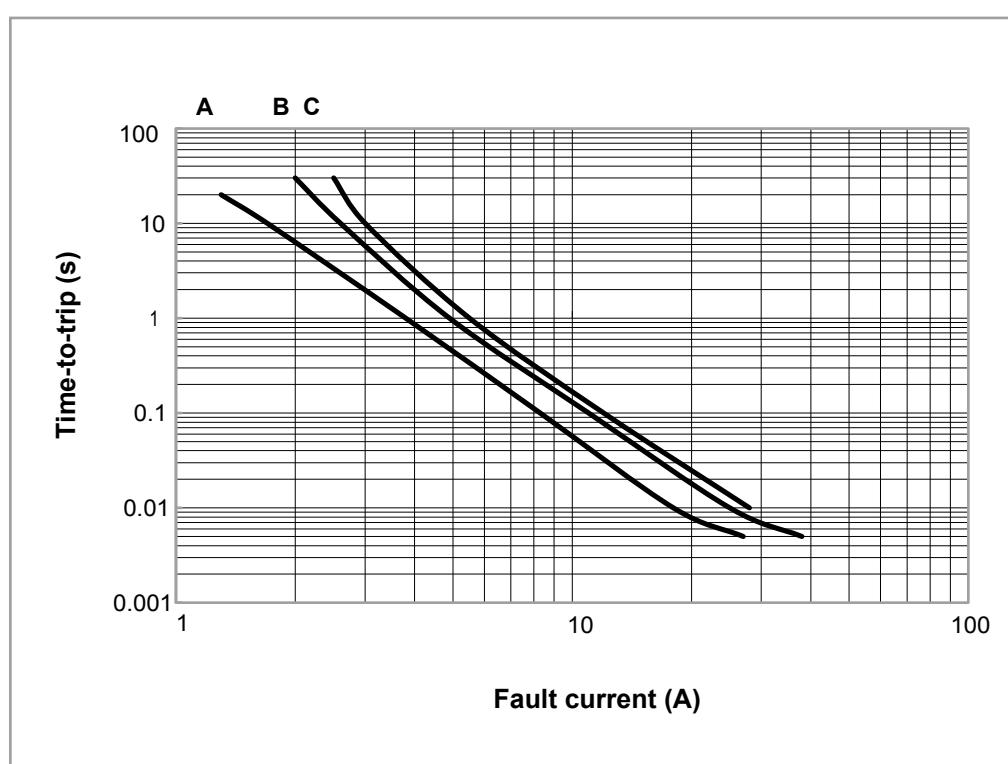


D = FUSB090F
E = FUSB110F
F = FUSB135F
G = FUSB160F
H = FUSB185F
I = FUSB250F

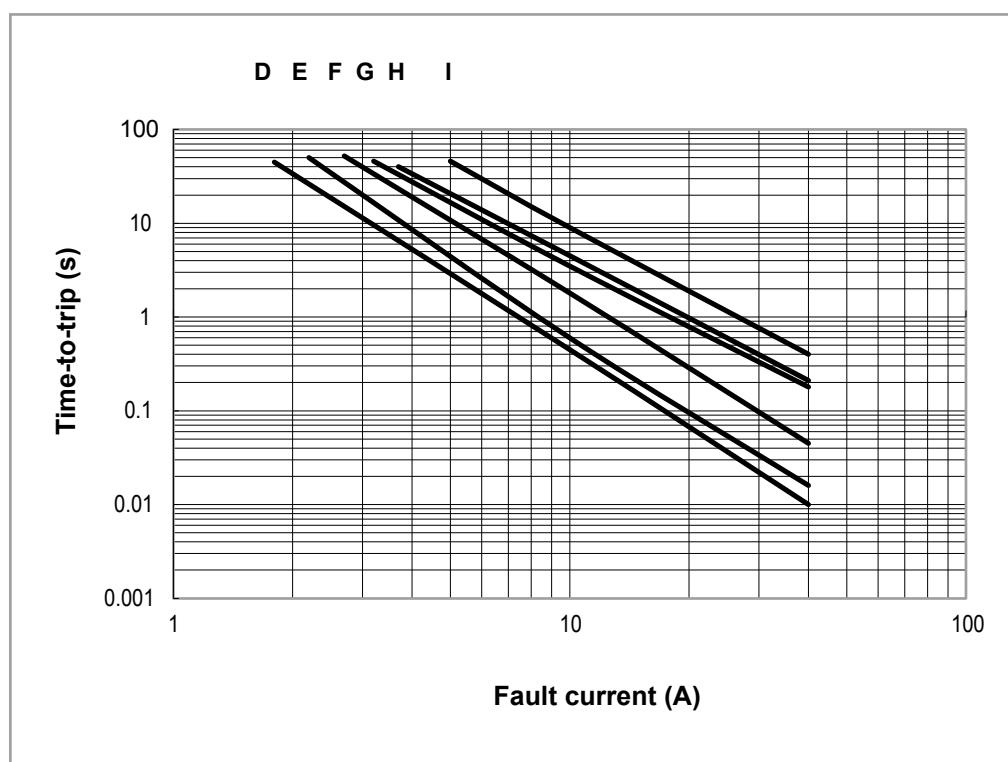

Part Numbering System

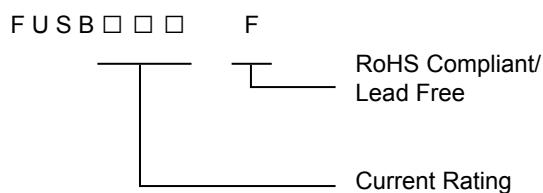

Part Marking System

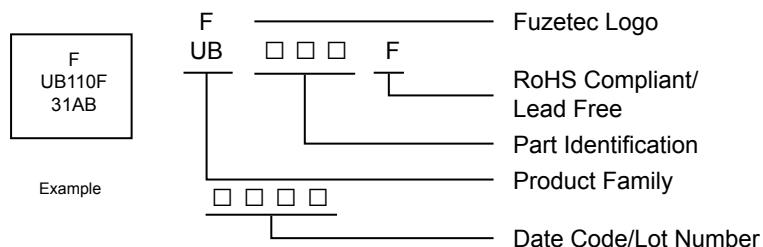


Standard Package

FUSB075F~FUSB250F : 500 Pcs/Bag, 3.0K Reel/Tape

- Warning :**
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 - PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 - Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.



FRG Series

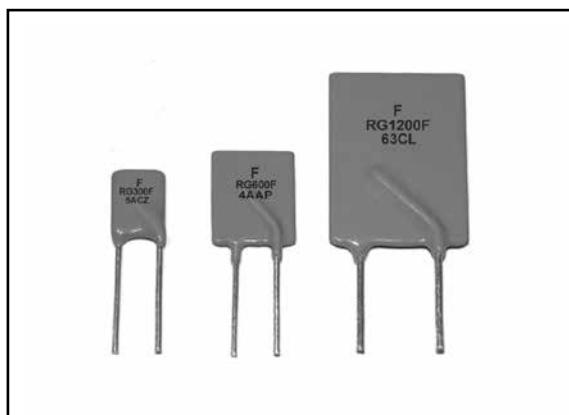

RoHS Compliant & Lead Free



Application : Wide variety of electronic equipment

Product Features : Very high hold current, Solid state
Radial-leaded product ideal for up to 16V_{DC}

Operation Current : 2.5 A~14.0A

Maximum Voltage : 16V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL(E211981)

C-UL(E211981)

TÜV (R50004084)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
	I _H , A	I _T , A					R _{MIN}	R _{1MAX}
FRG250-16F	2.5	4.7	5.0	100	16	1.0	0.022	0.053
FRG300-16F	3.0	5.1	2.0	100	16	2.3	0.034	0.105
FRG400-16F	4.0	6.8	3.5	100	16	2.4	0.020	0.063
FRG500-16F	5.0	8.5	3.6	100	16	2.6	0.014	0.044
FRG600-16F	6.0	10.2	5.8	100	16	2.8	0.009	0.033
FRG700-16F	7.0	11.9	8.0	100	16	3.0	0.006	0.021
FRG800-16F	8.0	13.6	9.0	100	16	3.0	0.005	0.018
FRG900-16F	9.0	15.3	12.0	100	16	3.3	0.004	0.015
FRG1000-16F	10.0	17.0	12.5	100	16	3.3	0.003	0.012
FRG1100-16F	11.0	18.7	13.5	100	16	3.7	0.003	0.010
FRG1200-16F	12.0	20.4	16.0	100	16	4.2	0.002	0.009
FRG1400-16F	14.0	23.8	20.0	100	16	4.6	0.002	0.008

Physical specifications :

Lead material : FRG250-16F Tin plated copper, 24 AWG.

FRG300-16F~FRG1100-16F Tin plated copper, 20 AWG.

FRG1200-16F~FRG1400-16F Tin plated copper, 18 AWG.

Soldering characteristics : MIL-STD-202, Method 208E.

Insulating coating : Flame retardant epoxy, meets UL-94V-0 requirement.

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	148%	132%	116%	100%	91%	84%	76%	69%	60%	48%

FRG Product Dimensions (mm)

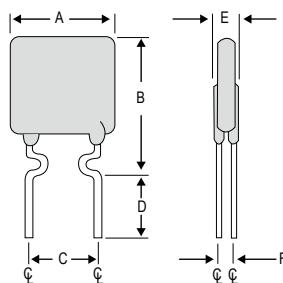


Fig.1
Lead Size : 24AWG
 Φ 0.51 mm Diameter

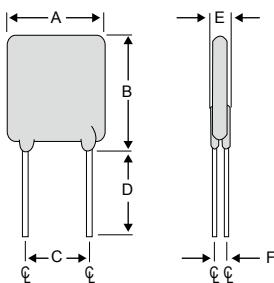


Fig.2
Lead Size : 20AWG
 Φ 0.81 mm Diameter


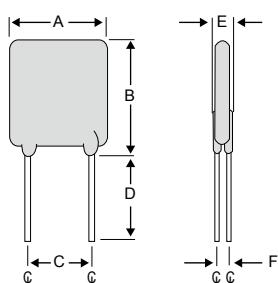


Fig.3
Lead Size : 18AWG
 Φ 1.0 mm Diameter


Part Number	Fig.	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FRG250-16F	1	8.9	12.8	5.1	7.6	3.0	1.2
FRG300-16F	2	7.1	11.0	5.1	7.6	3.0	1.2
FRG400-16F	2	8.9	12.8	5.1	7.6	3.0	1.2
FRG500-16F	2	10.4	14.3	5.1	7.6	3.0	1.2
FRG600-16F	2	10.7	17.1	5.1	7.6	3.0	1.2
FRG700-16F	2	11.2	19.7	5.1	7.6	3.0	1.2
FRG800-16F	2	12.7	20.9	5.1	7.6	3.0	1.2
FRG900-16F	2	14.0	21.7	5.1	7.6	3.0	1.2
FRG1000-16F	2	16.5	24.1	5.1	7.6	3.0	1.2
FRG1100-16F	2	17.5	26.0	5.1	7.6	3.0	1.2
FRG1200-16F	3	17.5	28.0	10.2	7.6	3.6	1.4
FRG1400-16F	3	27.9	27.9	10.2	7.6	3.6	1.4

Typical Time-To-Trip at 23°C


- A = FRG250-16F
- B = FRG300-16F
- C = FRG400-16F
- D = FRG500-16F
- E = FRG600-16F
- F = FRG700-16F
- G = FRG800-16F
- H = FRG900-16F
- I = FRG1000-16F
- J = FRG1100-16F
- K = FRG1200-16F
- L = FRG1400-16F

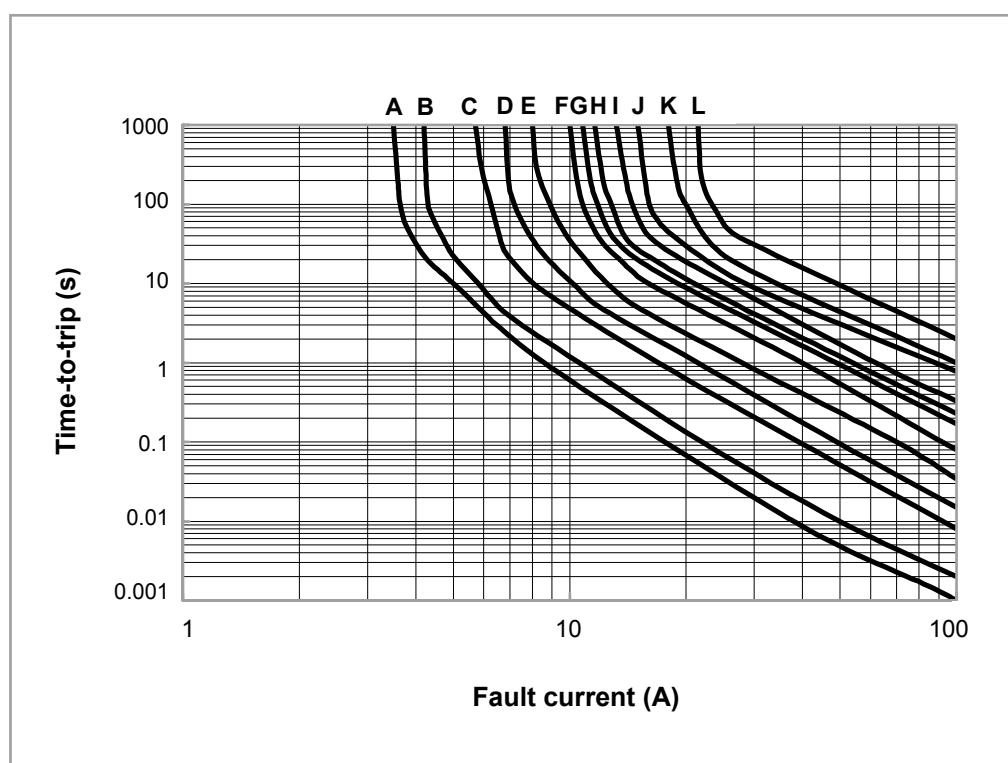

Part Numbering System

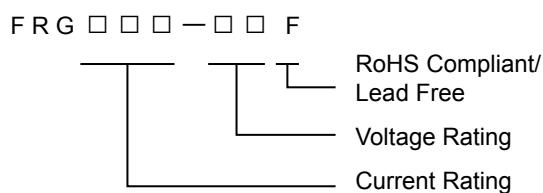

Part Marking System

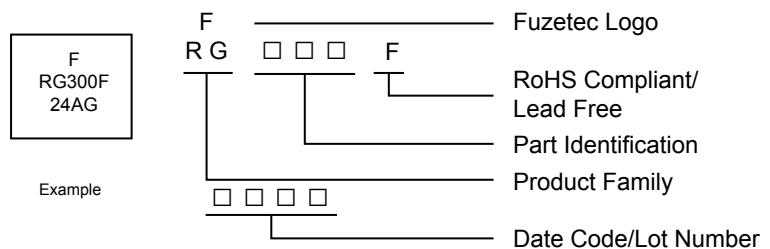

Standard Package


FRG250-16F~FRG300-16F	: 500 Pcs/Bag, 2.5K Reel/Tape
FRG400-16F~FRG600-16F	: 300 Pcs/Bag, 2.5K Reel/Tape
FRG700-16F	: 200 Pcs/Bag, 1.5K Reel/Tape
FRG800-16F~FRG900-16F	: 200 Pcs/Bag
FRG1000-16F~FRG1400-16F	: 100 Pcs/Bag

Warning :

- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.



FHT Series

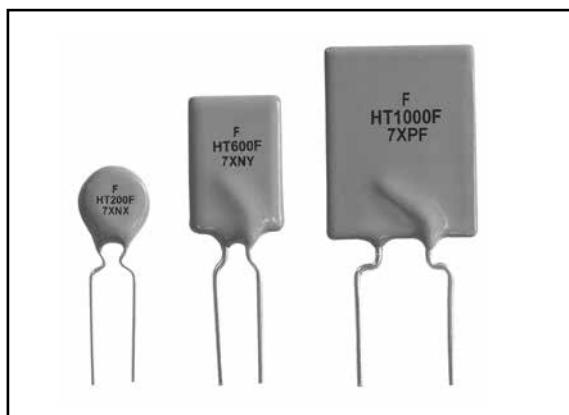

RoHS Compliant & Lead Free



Application : Wide variety of electronic equipment

Product Features : Very Low resistance, Very High hold current, Solid state, Radial leaded product ideal for up to 16V/30V_{DC} and operating temperatures up to 125°C.

Operation Current : 0.5A~15.0A

Maximum Voltage : 16V/30V_{DC}

Temperature Range : -40°C to 125°C

Agency Recognition : UL(E211981)

C-UL(E211981)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
	I _H , A	I _T , A	at 5xI _H , s				R _{MIN}	R _{1MAX}
FHT050-30F	0.5	0.9	2.5	40	30	0.9	0.4800	1.1000
FHT070-30F	0.7	1.4	3.2	40	30	1.4	0.3000	0.8000
FHT100-30F	1.0	1.8	5.2	40	30	1.4	0.1800	0.4300
FHT200-16F	2.0	3.8	3.0	100	16	1.4	0.0450	0.1100
FHT300-16F	3.0	6.0	5.0	100	16	3.0	0.0330	0.0790
FHT400-16F	4.0	7.0	5.0	100	16	3.3	0.0240	0.0600
FHT450-16F	4.5	7.8	3.0	100	16	3.6	0.0220	0.0540
FHT550-16F	5.5	10.0	6.0	100	16	3.5	0.0150	0.0370
FHT600-16F	6.0	10.8	5.0	100	16	4.1	0.0130	0.0320
FHT650-16F	6.5	12.0	5.5	100	16	4.3	0.0110	0.0260
FHT700-16F	7.0	13.0	7.0	100	16	4.0	0.0100	0.0250
FHT750-16F	7.5	13.1	7.0	100	16	4.5	0.0094	0.0220
FHT800-16F	8.0	15.0	8.0	100	16	4.2	0.0080	0.0200
FHT900-16F	9.0	16.5	10.0	100	16	5.0	0.0074	0.0170
FHT1000-16F	10.0	18.5	9.0	100	16	5.3	0.0062	0.0150
FHT1100-16F	11.0	20.0	11.0	100	16	5.5	0.0055	0.0130
FHT1300-16F	13.0	24.0	13.0	100	16	6.9	0.0041	0.0100
FHT1400-16F	14.0	27.0	13.0	100	16	6.9	0.0030	0.0090
FHT1500-16F	15.0	28.0	20.0	100	16	7.0	0.0032	0.0092

Physical specifications :

Lead material : FHT050-30F~FHT100-30F and FHT200-16F Tin plated copper, 24 AWG.

FHT300-16F~FHT1100-16F Tin plated copper, 20 AWG.

FHT1300-16F~FHT1500-16F Tin plated copper, 18 AWG.

Soldering characteristics : MIL-STD-202, Method 208E.

Insulating coating : Flame retardant epoxy, meets UL-94V-0 requirement.

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C	125°C
DERATING %	143%	129%	116%	100%	93%	87%	80%	72%	65%	55%	26%

FHT Product Dimensions (mm)

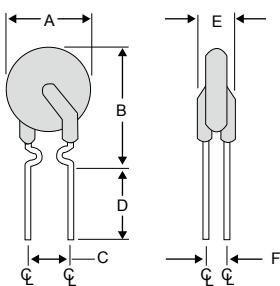


Fig.1
Lead Size : 24AWG
 Φ 0.51 mm Diameter

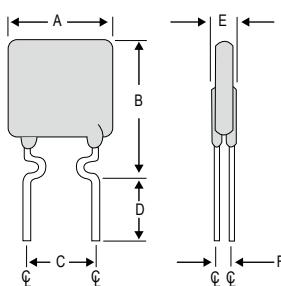


Fig.2
Lead Size : 24AWG
 Φ 0.51 mm Diameter

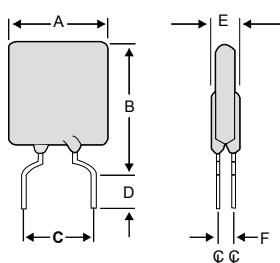


Fig.3
Lead Size : 20AWG
 Φ 0.81 mm Diameter


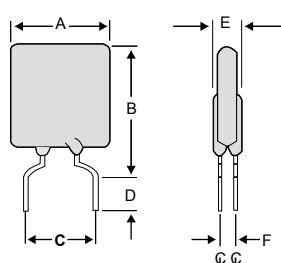


Fig.4
Lead Size : 18AWG
 Φ 1.00 mm Diameter

Part Number	Fig.	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FHT050-30F	1	7.4	12.7	5.1	7.6	3.0	1.2
FHT070-30F	2	6.9	10.8	5.1	7.6	3.0	1.2
FHT100-30F	1	9.7	13.6	5.1	7.6	3.0	1.2
FHT200-16F	1	9.4	14.4	5.1	7.6	3.0	1.2
FHT300-16F	3	8.8	13.8	5.1	7.6	3.0	1.2
FHT400-16F	3	10.0	15.0	5.1	7.6	3.0	1.2
FHT450-16F	3	10.4	15.6	5.1	7.6	3.0	1.2
FHT550-16F	3	11.2	18.9	5.1	7.6	3.0	1.2
FHT600-16F	3	11.2	21.0	5.1	7.6	3.0	1.2
FHT650-16F	3	12.7	22.2	5.1	7.6	3.0	1.2
FHT700-16F	3	14.0	21.9	5.1	7.6	3.0	1.2
FHT750-16F	3	14.0	23.5	5.1	7.6	3.0	1.2
FHT800-16F	3	16.5	22.5	5.1	7.6	3.0	1.2
FHT900-16F	3	16.5	25.7	5.1	7.6	3.0	1.2
FHT1000-16F	3	17.5	26.5	10.2	7.6	3.0	1.2
FHT1100-16F	3	21.0	26.1	10.2	7.6	3.0	1.2
FHT1300-16F	4	23.5	28.7	10.2	7.6	3.6	1.4
FHT1400-16F	4	23.5	28.7	10.2	7.6	3.6	1.4
FHT1500-16F	4	23.5	28.7	10.2	7.6	3.6	1.4


Typical Time-To-Trip at 23°C

- A = FHT050-30F**
- B = FHT070-30F**
- C = FHT100-30F**
- D = FHT200-16F**
- E = FHT300-16F**
- F = FHT400-16F**
- G = FHT450-16F**
- H = FHT550-16F**
- I = FHT600-16F**
- J = FHT650-16F**
- K = FHT700-16F**
- L = FHT750-16F**
- M = FHT800-16F**
- N = FHT900-16F**
- O = FHT1000-16F**
- P = FHT1100-16F**
- Q = FHT1300-16F**
- R = FHT1400-16F**
- S = FHT1500-16F**

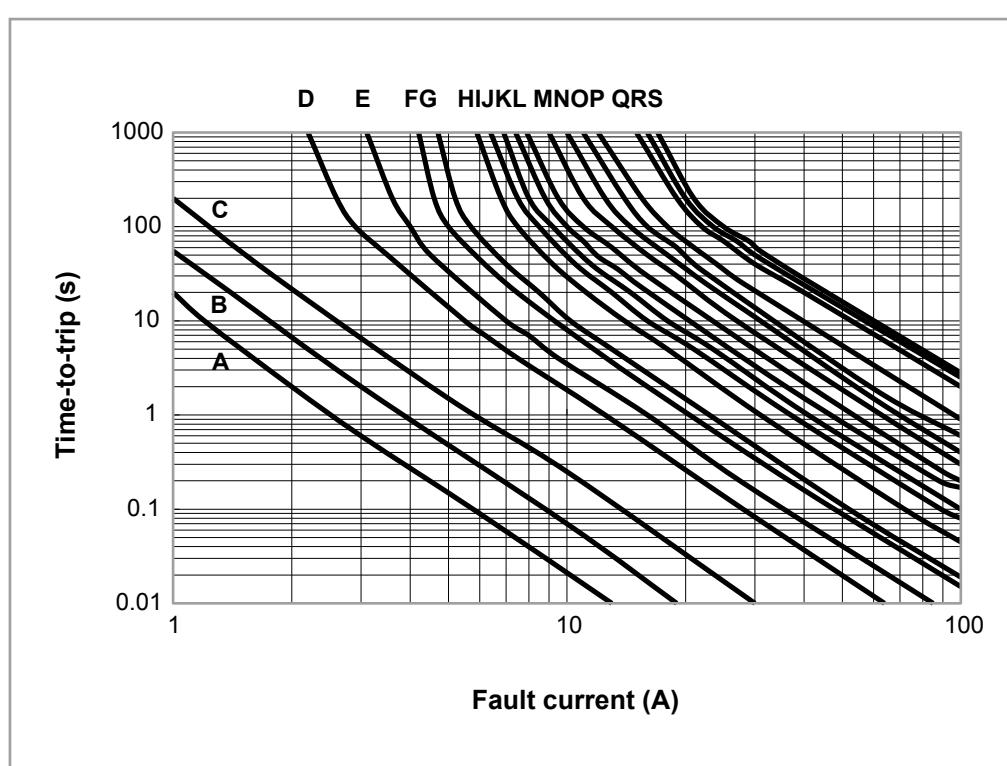



Part Numbering System

F H T □ □ □ - □ □ F

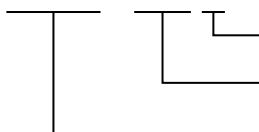

RoHS Compliant/
Lead Free
Voltage Rating
Current Rating

Part Marking System

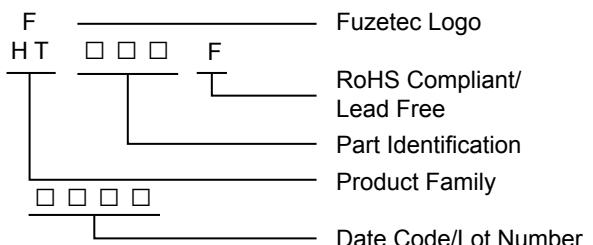

Date Code/Lot Number


Standard Package

FHT050-30F~FHT300-16F	: 500 Pcs/Bag, 2.5K Reel/Tape
FHT400-16F	: 300 Pcs/Bag, 2.5K Reel/Tape
FHT450-16F~FHT550-16F	: 300 Pcs/Bag, 1.5K Reel/Tape
FHT600-16F	: 200 Pcs/Bag, 1.5K Reel/Tape
FHT650-16F~FHT700-16F	: 200 Pcs/Bag
FHT750-16F~FHT1500-16F	: 100 Pcs/Bag

- Warning :**
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 - PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 - Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.



FRHV Series

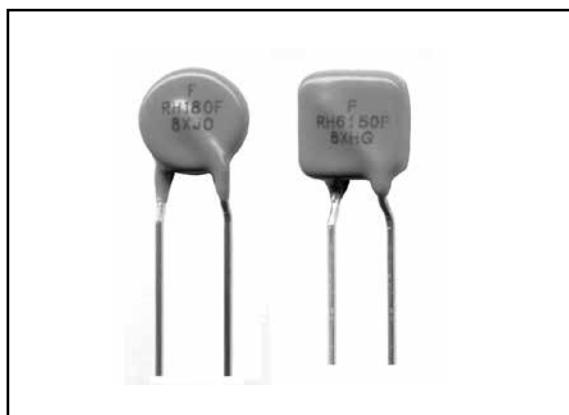

RoHS Compliant & Lead Free



Application : Telecommunication and Data transmitting

Product Features : Low hold current, Solid state

Operation Current : 0.08 A~0.40A

Max. Operation Voltage : 60V/100V/250V_{DC}

Max. Interrupt Voltage : 250V/600V_{AC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL(E211981), *UL497A

C-UL(E211981)

TÜV (R50138901)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip		Max. Current	Max. Oper. Voltage	Max. Int. Voltage	Typ. Power	Resistance	
			Current	Time					R _{MIN}	R _{1MAX}
	I _H , A	I _T , A	A	Sec	I _{MAX} , A	V _{MAX} , V _{DC}	V _{I-MAX} , V _{AC}	Pd, W	Ohms	Ohms
FRH080-250VF	0.08	0.16	0.35	4.0	3.0	100	250	1.0	14.0	33.0
FRH110-250VF	0.11	0.22	1.00	2.0	3.0	100	250	1.0	5.0	16.0
FRH120-250VF	0.12	0.24	1.00	2.0	3.0	100	250	1.0	4.0	16.0
FRH145-250VF	0.15	0.29	1.00	2.5	3.0	100	250	1.0	3.0	12.0
FRH180-250XF	0.18	0.65	3.00	2.0	10.0	100	250	1.5	0.8	4.0
FRH150-600MF	0.15	0.30	1.00	4.0	3.0	250	600	1.0	6.0	17.0
FRH160-600MF	0.16	0.32	1.00	7.0	3.0	250	600	1.0	4.0	16.0
FRH160-600VF	0.16	0.32	1.00	7.0	3.0	250	600	1.0	4.0	18.0
FRH200-600VF	0.20	0.40	1.00	12.0	3.0	250	600	1.0	4.00	13.50
FRH250-600VF	0.25	0.86	3.00	1.0	3.0	250	600	1.0	1.00	7.00
FRH400-600F	0.40	1.00	3.00	4.0	3.0	60	600	1.0	0.95	1.90

Physical specifications :

Lead material : Tin plated copper, 22 AWG

Soldering characteristics : MIL-STD-202, Method 208E.

Insulating coating : Flame retardant epoxy, meet UL-94V-0 requirement.

*NOTE : All FRHV products are designed to assist equipment to pass ITU, UL1950 or GR1089 specification.

*FRH150-600MF, FRH160-600VF meet UL497A Overvoltage and Endurance Conditioning requirements for Thermistor type component.

CAUTION : FRHV devices are not intended for continuous use of Line Voltage such as 120V_{AC} ~ 600V_{AC} and above.

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	158%	138%	119%	100%	92%	83%	73%	64%	54%	40%

FRHV Product Dimensions (mm)

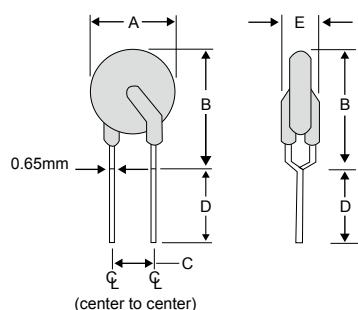


Fig.1
Lead Size : 22AWG
Φ 0.65 mm Diameter


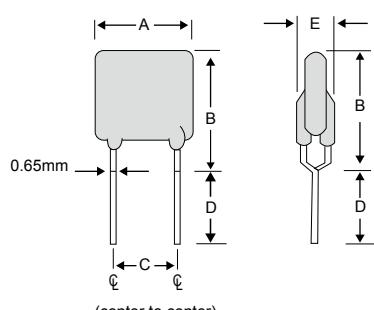


Fig.2
Lead Size : 22AWG
Φ 0.65 mm Diameter


Part Number	Fig.	A	B	C	D	E
		Max.	Max.	Typ.	Min.	Max.
FRH080-250VF	1	5.8	9.6	5.0	4.7	4.6
FRH110-250VF	1	6.8	9.9	5.0	4.7	4.6
FRH120-250VF	2	6.5	11.0	5.0	4.7	4.6
FRH145-250VF	2	6.5	11.0	5.0	4.7	4.6
FRH180-250XF	1	9.0	12.0	5.0	4.7	3.8
FRH150-600MF	2	9.0	12.5	5.0	4.7	4.6
FRH160-600MF	2	9.0	12.5	5.0	4.7	4.6
FRH160-600VF	2	16.0	12.6	5.0	4.7	6.0
FRH200-600VF	2	12.0	14.0	5.0	4.7	6.0
FRH250-600VF	2	12.0	15.0	5.0	4.7	6.0
FRH400-600F	2	15.0	14.5	5.0	4.7	6.0

Typical Time-To-Trip at 23°C

- A = FRH080-250VF
- B = FRH110-250VF
- C = FRH120-250VF
- D = FRH145-250VF
- E = FRH160-600VF
- F = FRH200-600VF
- G = FRH250-600VF
- H = FRH400-600F

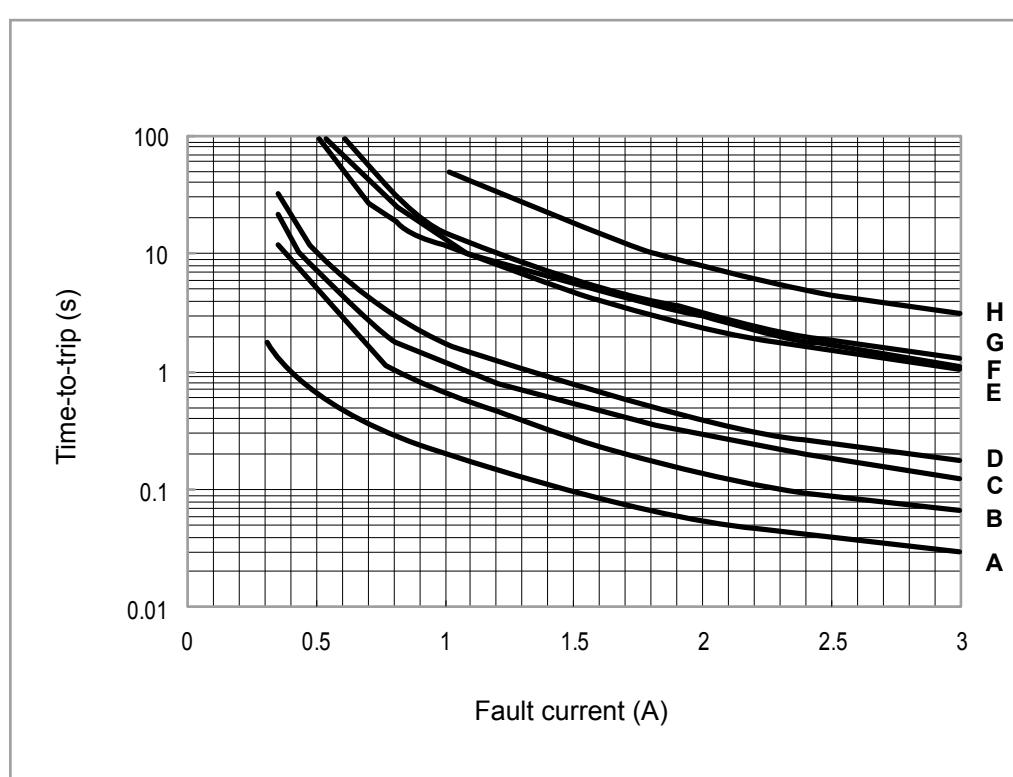


I = FRH150-600MF
 J = FRH180-250XF
 K = FRH160-600MF

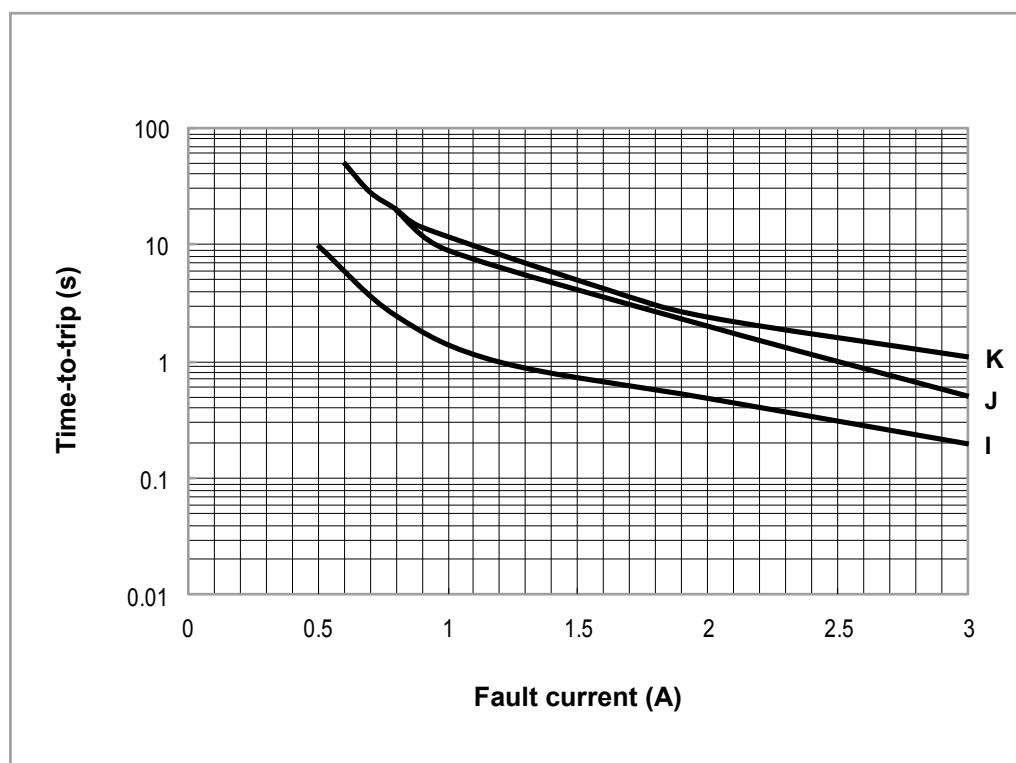


Part Numbering System

FRH□□□-□□□V F

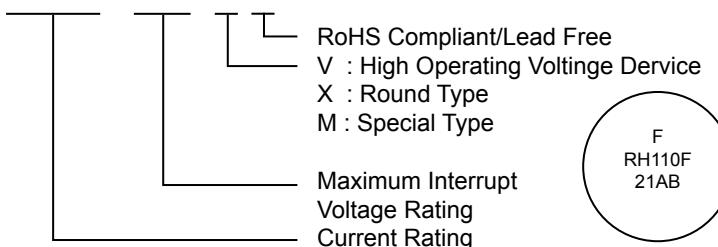

- * FRH150-600MF Marking : RH6150F
- * FRH160-600MF Marking : RH6160F
- * FRH160-600VF Marking : RH6160F
- * FRH200-600VF Marking : RH6200F
- * FRH250-600VF Marking : RH6250F
- * FRH400-600VF Marking : RH6400F

Part Marking System

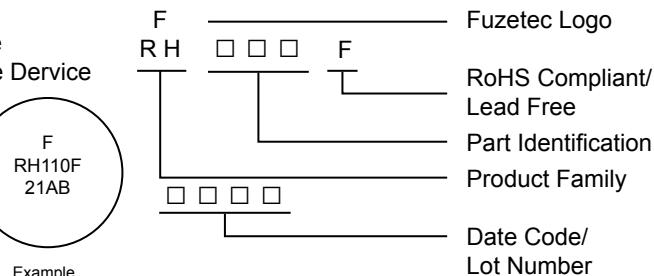


Standard Package

FRH080-250VF~FRH145-250VF : 300 Pcs/Bag, 1.5K Reel/Tape
 FRH180-250XF : 200 Pcs/Bag, 1.5K Reel/Tape
 FRH150-600MF~FRH160-600MF : 100 Pcs/Bag, 1.2K Reel/Tape
 FRH160-600VF : 100 Pcs/Bag, 0.6K Reel/Tape
 FRH200-600VF~FRH400-600VF : 100 Pcs/Bag

Warning :

- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

FRVL Series

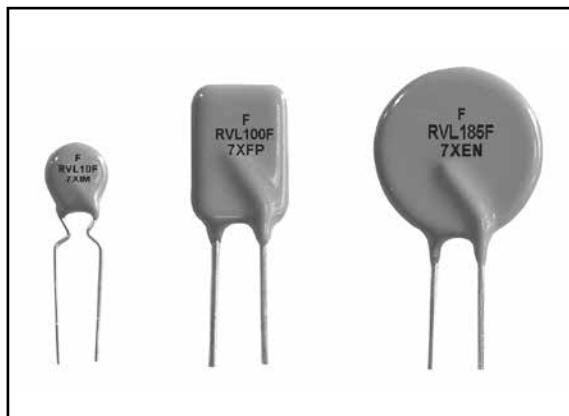

RoHS Compliant & Lead Free



Application : Line Voltage Power Supply, Transformer and Appliances Product

Features : Solid state, Radial leaded product ideal for up to 120V_{AC/DC}

Maximum Operation Current : 0.10A~3.75A

Maximum Voltage : 120V_{AC/DC}

Maximum Interrupt Voltage : 135V_{AC/DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

C-UL (E211981)

TÜV (R50122733)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Max. Oper. Voltage	Max. Int. Voltage	Typ. Power	Resistance	
	I _H , A	I _T , A						R _{MIN}	R _{1MAX}
FRVL010-120F	0.10	0.20	10.0	2.0	120	135	0.84	3.00	7.50
FRVL017-120F	0.17	0.34	10.0	2.0	120	135	0.84	2.00	7.00
FRVL020-120F	0.20	0.40	9.0	2.0	120	135	1.08	1.83	4.40
FRVL025-120F	0.25	0.50	7.5	3.0	120	135	1.08	1.25	3.00
FRVL030-120F	0.30	0.60	8.5	3.0	120	135	1.44	0.88	2.10
FRVL040-120F	0.40	0.80	6.5	3.0	120	135	1.44	0.55	1.29
FRVL050-120F	0.50	1.00	6.0	3.0	120	135	1.56	0.50	1.17
FRVL065-120F	0.65	1.30	5.7	5.0	120	135	1.68	0.31	0.72
FRVL070-120F	0.75	1.50	6.3	5.0	120	135	1.80	0.25	0.60
FRVL075-120F	0.75	1.50	15.0	7.5	120	135	2.64	0.25	0.69
FRVL090-120F	0.90	1.80	7.2	5.0	120	135	1.80	0.20	0.47
FRVL100-120F	1.00	2.00	15.0	10.0	120	135	2.64	0.18	0.47
FRVL110-120F	1.10	2.20	8.2	8.0	120	135	2.28	0.15	0.38
FRVL125-120F	1.25	2.50	20.0	12.5	120	135	2.88	0.11	0.33
FRVL130-120F	1.35	2.70	9.6	10.0	120	135	2.64	0.12	0.30
FRVL135-120F	1.35	2.70	20.0	13.5	120	135	3.12	0.11	0.30
FRVL160-120F	1.60	3.20	11.4	12.0	120	135	3.12	0.09	0.22
FRVL185-120F	1.85	3.70	12.6	12.0	120	135	3.36	0.08	0.19
FRVL200-120F	2.00	4.20	36.0	20.0	120	135	4.32	0.08	0.21
FRVL250-120F	2.50	5.00	15.6	15.0	120	135	4.44	0.05	0.13
FRVL300-120F	3.00	6.00	19.8	17.0	120	135	4.56	0.04	0.10
FRVL375-120F	3.75	7.50	24.0	20.0	120	135	4.80	0.03	0.08

Physical specifications :

Lead material : FRVL010-120F~FRVL017-120F Tin plated copper, 24AWG.

FRVL020-120F~FRVL070-120F and FRVL090-120F Tin plated copper, 22AWG.

FRVL075-120F and FRVL100-120F~FRVL375-120F Tin plated copper, 20AWG.

Soldering characteristics : MIL-STD-202, Method 208E.

Insulating coating : Flame retardant epoxy, meets UL-94V-0 requirement.

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	158%	138%	119%	100%	90%	80%	70%	60%	50%	38%

FRVL Product Dimensions (mm)

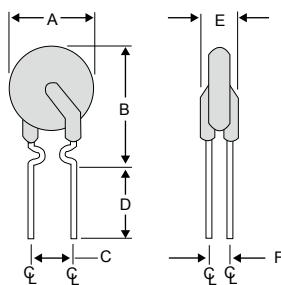


Fig.1
Lead Size : 24AWG
 Φ 0.51 mm Diameter

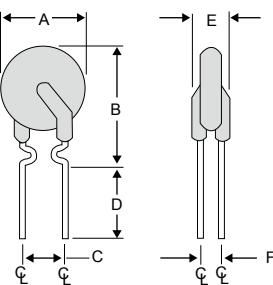


Fig.2
Lead Size : 22AWG
 Φ 0.65 mm Diameter

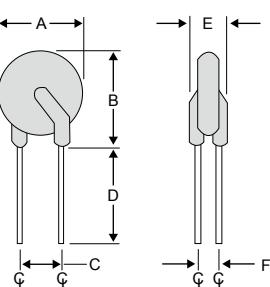


Fig.3
Lead Size : 20AWG
 Φ 0.81 mm Diameter


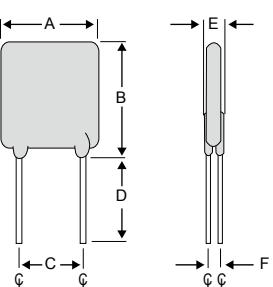


Fig.4
Lead Size : 20AWG
 Φ 0.81 mm Diameter


Part Number	Fig.	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FRVL010-120F	1	7.9	13.0	5.1	7.6	3.8	2.2
FRVL017-120F	1	7.9	13.0	5.1	7.6	3.8	2.2
FRVL020-120F	2	7.9	13.0	5.1	7.6	3.8	2.2
FRVL025-120F	2	7.9	13.0	5.1	7.6	3.8	2.2
FRVL030-120F	2	7.9	13.0	5.1	7.6	3.8	2.2
FRVL040-120F	2	8.2	14.2	5.1	7.6	3.8	2.2
FRVL050-120F	2	9.2	14.9	5.1	7.6	3.8	2.2
FRVL065-120F	2	9.7	14.9	5.1	7.6	3.8	2.2
FRVL070-120F	2	10.6	15.5	5.1	7.6	3.8	2.2
FRVL075-120F	4	10.9	17.0	5.1	7.6	4.1	2.2
FRVL090-120F	2	11.9	15.9	5.1	7.6	3.8	2.2
FRVL100-120F	4	11.5	20.1	5.1	7.6	4.1	2.2
FRVL110-120F	3	13.3	18.3	5.1	7.6	4.1	2.2
FRVL125-120F	4	14.0	21.7	5.1	7.6	4.1	2.2
FRVL130-120F	3	15.5	20.6	5.1	7.6	4.1	2.2
FRVL135-120F	4	16.3	21.7	5.1	7.6	4.1	2.2
FRVL160-120F	3	17.5	22.5	5.1	7.6	4.1	2.2
FRVL185-120F	3	19.9	24.9	5.1	7.6	4.1	2.2
FRVL200-120F	4	23.5	27.9	10.2	7.6	4.1	2.2
FRVL250-120F	3	22.5	27.5	10.2	7.6	4.1	2.2
FRVL300-120F	3	25.5	30.0	10.2	7.6	4.1	2.2
FRVL375-120F	3	29.5	34.0	10.2	7.6	4.1	2.2

Typical Time-To-Trip at 23°C


- A = FRVL010-120F
- B = FRVL017-120F
- C = FRVL020-120F
- D = FRVL025-120F
- E = FRVL030-120F
- F = FRVL040-120F
- G = FRVL050-120F
- H = FRVL065-120F
- I = FRVL070-120F
- J = FRVL090-120F
- K = FRVL110-120F
- L = FRVL130-120F
- M = FRVL160-120F
- N = FRVL185-120F
- O = FRVL250-120F
- P = FRVL300-120F
- Q = FRVL375-120F

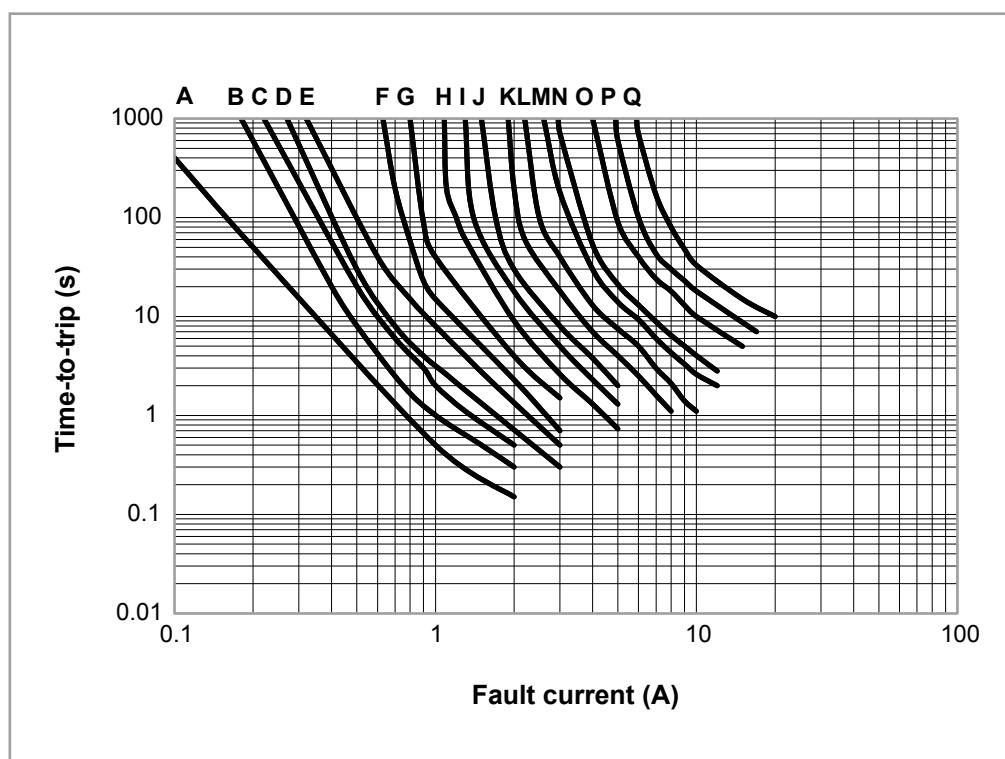


R = FRVL075-120F
S = FRVL100-120F
T = FRVL125-120F
U = FRVL135-120F
V = FRVL200-120F

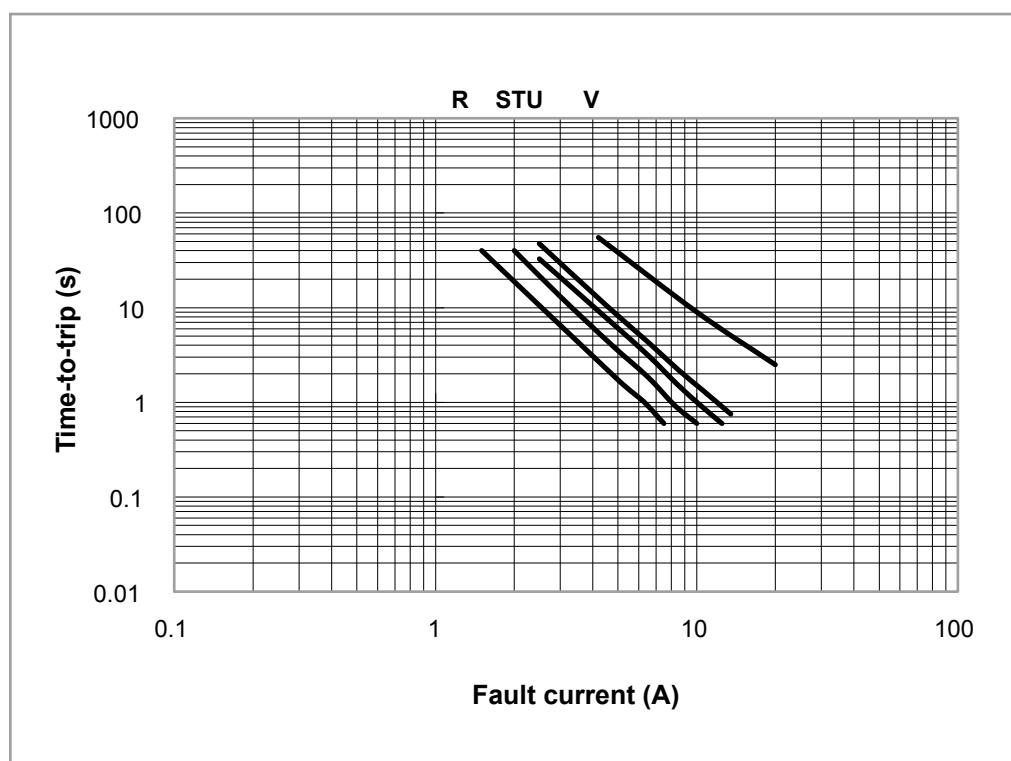

Part Numbering System

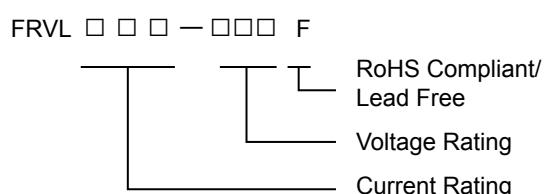

Part Marking System

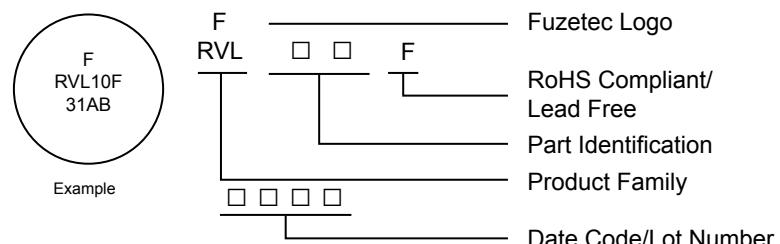


Standard Package

FRVL010-120F~FRVL050-120F : 500 Pcs/Bag, 2.0K Reel/Tape
 FRVL065-120F~FRVL075-120F : 300 Pcs/Bag, 1.5K Reel/Tape
 FRVL090-120F : 300 Pcs/Bag, 2.0K Reel/Tape
 FRVL100-120F~FRVL110-120F : 300 Pcs/Bag, 1.5K Reel/Tape
 FRVL125-120F~FRVL135-120F : 200 Pcs/Bag, 1.0K Reel/Tape
 FRVL160-120F : 200 Pcs/Bag
 FRVL185-120F~FRVL375-120F : 100 Pcs/Bag

Warning :

- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

FRV Series

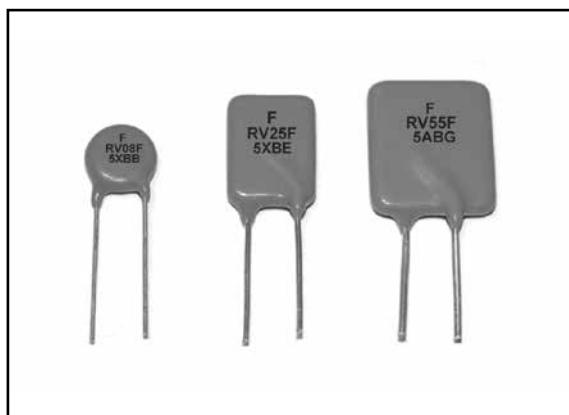

RoHS Compliant & Lead Free



Application : Line Voltage Power Supply, Transformer and Appliances

Product Features : Low hold current, Solid state, Radial leaded product ideal for up to 265V_{AC/DC}

Maximum Operation Current : 0.05A~2.00A

Maximum Operating Voltage : 240V_{AC/DC}

Maximum Interrupt Voltage : 265V_{AC/DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL(E211981)

C-UL(E211981)

TÜV(R50087018)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Max. Int. Voltage	Typ. Power	Resistance	
	I _H , A	I _T , A						R _{MIN}	R _{1MAX}
FRV005-240F	0.05	0.12	15.0	1.0	240	265	0.70	18.50	65.00
FRV008-240F	0.08	0.19	15.0	1.2	240	265	0.80	7.40	26.00
FRV012-240F	0.12	0.30	15.0	1.2	240	265	1.00	3.00	12.00
FRV016-240F	0.16	0.37	15.0	2.0	240	265	1.40	2.50	7.80
FRV025-240F	0.25	0.56	18.5	3.5	240	265	1.50	1.30	3.80
FRV033-240F	0.33	0.74	21.0	4.5	240	265	1.70	0.83	2.60
FRV040-240F	0.40	0.90	24.0	5.5	240	265	2.00	0.60	1.90
FRV055-240F	0.55	1.25	26.0	7.0	240	265	3.40	0.45	1.45
FRV075-240F	0.75	1.50	18.0	7.5	240	265	2.60	0.32	0.84
FRV100-240F	1.00	2.00	21.0	10.0	240	265	2.90	0.22	0.58
FRV125-240F	1.25	2.50	23.0	12.5	240	265	3.30	0.17	0.44
FRV150-240F	1.50	3.00	23.0	15.0	240	265	3.70	0.12	0.32
FRV200-240F	2.00	4.00	28.0	20.0	240	265	4.50	0.09	0.22

Physical specifications :

Lead material : FRV005-240F~FRV016-240F Tin plated copper, 24AWG.

FRV025-240F~FRV040-240F Tin plated copper, 22AWG.

FRV055-240F~FRV200-240F Tin plated copper, 20AWG.

Soldering characteristics : MIL-STD-202, Method 208E.

Insulating coating : Flame retardant epoxy, meets UL-94V-0 requirement.

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	150%	134%	116%	100%	90%	81%	74%	65%	58%	44 %

FRV Product Dimensions (mm)

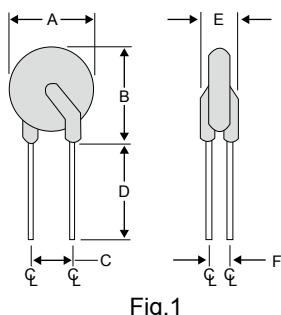


Fig.1
Lead Size : 24AWG
 Φ 0.51 mm Diameter

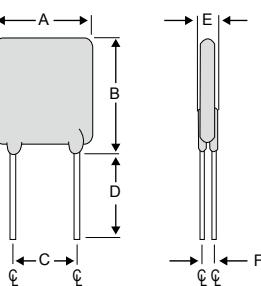


Fig.2
Lead Size : 22AWG
 Φ 0.65 mm Diameter

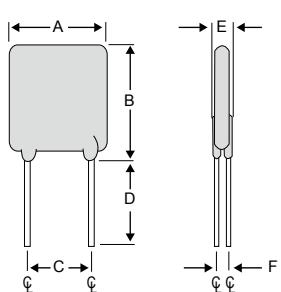


Fig.3
Lead Size : 20AWG
 Φ 0.81 mm Diameter


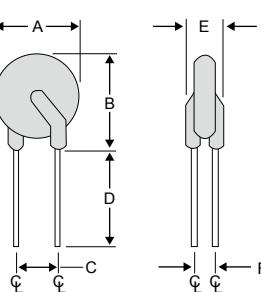


Fig.4
Lead Size : 20AWG
 Φ 0.81 mm Diameter


Part Number	Fig	A	B	C	D	E	F
		Max.	Max.	Typ.	Min.	Max.	Typ.
FRV005-240F	1	8.3	10.7	5.1	7.6	3.8	1.6
FRV008-240F	1	8.3	10.7	5.1	7.6	3.8	1.6
FRV012-240F	1	8.3	10.7	5.1	7.6	3.8	1.6
FRV016-240F	1	9.9	12.5	5.1	7.6	3.8	1.6
FRV025-240F	2	9.6	17.4	5.1	7.6	3.8	1.8
FRV033-240F	2	11.4	16.5	5.1	7.6	3.8	1.8
FRV040-240F	2	11.5	19.5	5.1	7.6	3.8	1.8
FRV055-240F	3	14.0	21.7	5.1	7.6	4.1	1.9
FRV075-240F	3	11.5	23.4	5.1	7.6	4.8	1.9
FRV100-240F	4	18.7	24.4	10.2	7.6	5.1	1.9
FRV125-240F	4	21.2	27.4	10.2	7.6	5.3	1.9
FRV150-240F	4	23.4	30.9	10.2	7.6	5.3	1.9
FRV200-240F	3	24.9	33.8	10.2	7.6	6.1	1.9

Typical Time-To-Trip at 23°C


- A = FRV005-240F
- B = FRV008-240F
- C = FRV012-240F
- D = FRV016-240F
- E = FRV025-240F
- F = FRV033-240F
- G = FRV040-240F
- H = FRV055-240F
- I = FRV075-240F
- J = FRV100-240F
- K = FRV125-240F
- L = FRV150-240F
- M = FRV200-240F

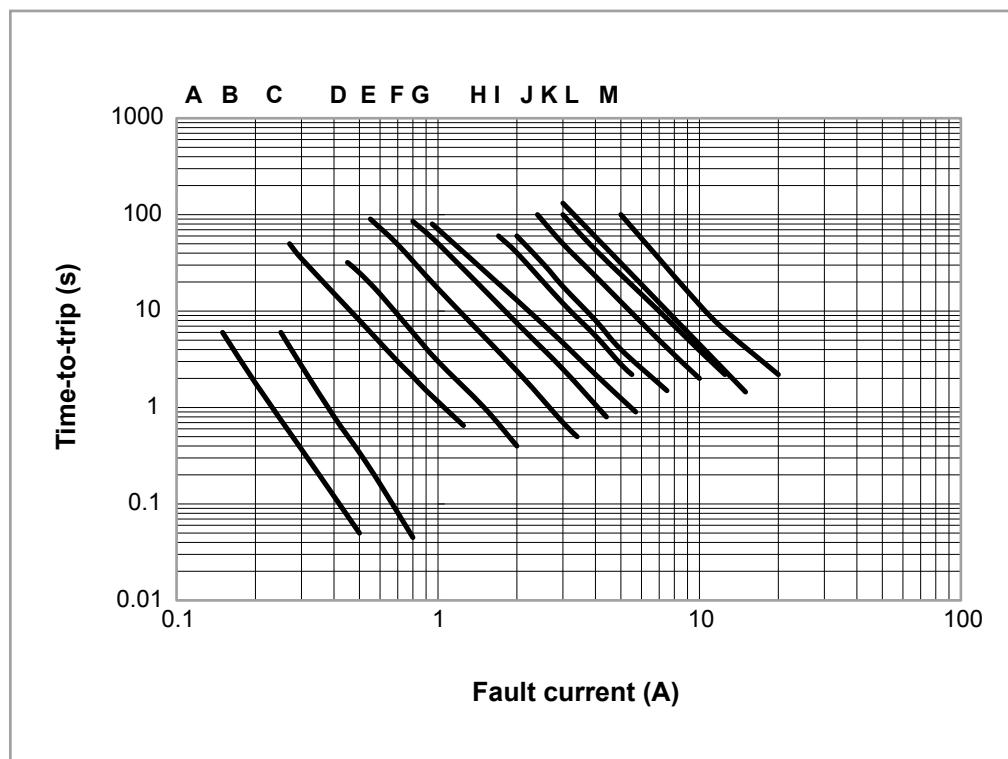

Part Numbering System

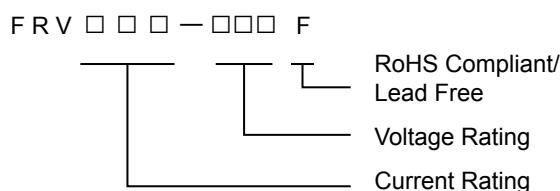

Part Marking System

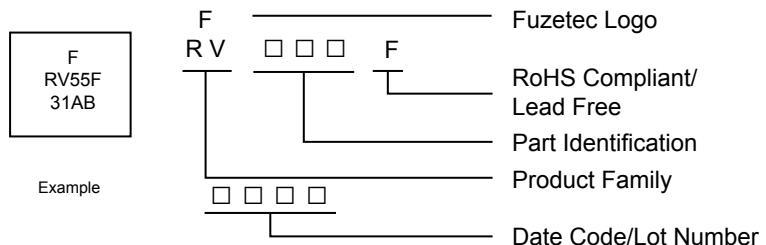

Standard Package

FRV005-240F~FRV016-240F : 500 Pcs/Bag, 2.0K Reel/Tape
 FRV025-240F : 300 Pcs/Bag, 2.0K Reel/Tape
 FRV033-240F~FRV040-240F : 200 Pcs/Bag, 2.0K Reel/Tape
 FRV055-240F : 200 Pcs/Bag, 1.0K Reel/Tape
 FRV075-240F : 200 Pcs/Bag
 FRV100-240F~FRV200-240F : 100 Pcs/Bag

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

FSMD2920 Series



RoHS Compliant & Halogen Free

RoHS

HF

Halogen Free

Application : All high-density boards

Product Features : 2920 Dimension, Surface mountable, Solid state, Faster time to trip than standard SMD devices.

Operation Current : 0.3A~3.0A

Maximum Voltage : 6V~60V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

C-UL (E211981)

TÜV (R50090556)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance	
	I _H , A	I _T , A	V _{MAX} , V _{DC}			P _d , W	A	Sec	Ohms
FSMD030-2920-R	0.30	0.60	60	100	1.5	1.5	3.0	1.000	4.800
FSMD050-2920-R	0.50	1.00	60	100	1.5	2.5	4.0	0.300	1.400
FSMD075-2920-R	0.75	1.50	33	100	1.5	8.0	0.3	0.180	1.000
FSMD075-60-2920-R	0.75	1.50	60	100	1.5	8.0	0.3	0.180	1.000
FSMD100-2920-R	1.10	2.20	33	100	1.5	8.0	0.5	0.090	0.410
FSMD100-60-2920R	1.10	2.20	60	100	1.5	8.0	0.5	0.090	0.410
FSMD125-2920-R	1.25	2.50	33	100	1.5	8.0	2.0	0.050	0.250
FSMD150-2920-R	1.50	3.00	33	100	1.5	8.0	2.0	0.050	0.230
FSMD185-2920-R	1.85	3.70	33	100	1.5	8.0	2.5	0.040	0.150
FSMD200-2920-R	2.00	4.00	16	100	1.5	8.0	4.5	0.035	0.120
FSMD200-24-2920-R	2.00	4.00	24	100	1.5	8.0	5.0	0.035	0.120
FSMD250-2920-R	2.50	5.00	16	100	1.5	8.0	16.0	0.025	0.085
FSMD260-2920-R	2.60	5.20	6	100	1.5	8.0	20.0	0.020	0.075
FSMD260-24-2920R	2.60	5.20	24	100	1.5	8.0	20.0	0.020	0.075
FSMD300-2920-R	3.00	5.20	6	100	1.5	8.0	25.0	0.010	0.048
FSMD300-15-2920R	3.00	5.20	15	100	1.5	8.0	20.0	0.010	0.048
FSMD300-24-2920R	3.00	5.20	24	100	1.5	8.0	20.0	0.010	0.048


Termination pad characteristics

Termination pad materials: Pure Tin

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	158%	138%	119%	100%	90%	81%	72%	60%	50%	36%

FSMD2920 Product Dimensions (mm)

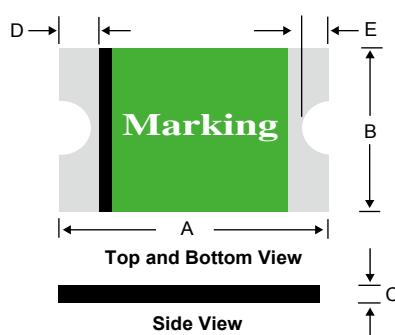


Part Number	A		B		C		D		E	
	Min.	Max.								
FSMD030-2920-R	6.73	7.98	4.80	5.44	0.60	1.15	0.50	1.20	0.50	0.90
FSMD050-2920-R	6.73	7.98	4.80	5.44	0.60	1.15	0.50	1.20	0.50	0.90
FSMD075-2920-R	6.73	7.98	4.80	5.44	0.40	1.15	0.50	1.20	0.50	0.90
FSMD075-60-2920-R	6.73	7.98	4.80	5.44	0.60	1.15	0.50	1.20	0.50	0.90
FSMD100-2920-R	6.73	7.98	4.80	5.44	0.40	1.00	0.50	1.20	0.50	0.90
FSMD100-60-2920R	6.73	7.98	4.80	5.44	0.40	1.70	0.50	1.20	0.50	0.90
FSMD125-2920-R	6.73	7.98	4.80	5.44	0.40	0.90	0.50	1.20	0.50	0.90
FSMD150-2920-R	6.73	7.98	4.80	5.44	0.40	0.90	0.50	1.20	0.50	0.90
FSMD185-2920-R	6.73	7.98	4.80	5.44	0.30	0.90	0.50	1.20	0.50	0.90
FSMD200-2920-R	6.73	7.98	4.80	5.44	0.30	0.90	0.50	1.20	0.50	0.90
FSMD200-24-2920-R	6.73	7.98	4.80	5.44	0.20	0.80	0.50	1.20	0.50	0.90
FSMD250-2920-R	6.73	7.98	4.80	5.44	0.30	0.90	0.50	1.20	0.50	0.90
FSMD260-2920-R	6.73	7.98	4.80	5.44	0.30	0.90	0.50	1.20	0.50	0.90
FSMD260-24-2920R	6.73	7.98	4.80	5.44	0.65	1.15	0.50	1.20	0.50	0.90
FSMD300-2920-R	6.73	7.98	4.80	5.44	0.40	0.90	0.50	1.20	0.50	0.90
FSMD300-15-2920R	6.73	7.98	4.80	5.44	0.40	1.15	0.50	1.20	0.50	0.90
FSMD300-24-2920R	6.73	7.98	4.80	5.44	0.65	1.15	0.50	1.20	0.50	0.90

*For Reflow Soldering Profile information, please refer to P.76 “ IV APPENDIX – SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”


Typical Time-To-Trip at 23°C

A = FSMD030-2920-R
B = FSMD050-2920-R
C = FSMD075-2920-R/
075-60-2920-R
D = FSMD100-2920-R/
100-60-2920R
E = FSMD125-2920-R
F = FSMD150-2920-R
G = FSMD185-2920-R
H = FSMD200-2920-R/
200-24-2920-R
I = FSMD250-2920-R
J = FSMD260-2920-R/
260-24-2920R
K = FSMD300-2920-R/
300-15-2920R/
300-24-2920R




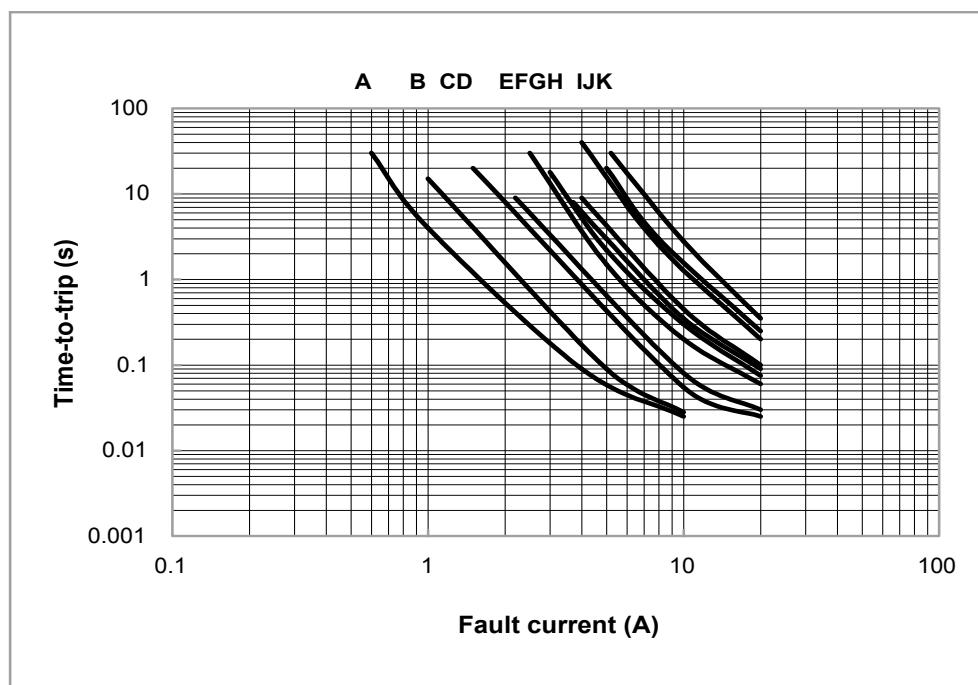


Part Numbering System

F S M D □ □ □ — □ □ - 2920 - R

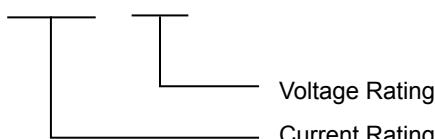

Part Marking System



Standard Package

FSMD030-2920-R~FSMD100-2920-R : 2.0K Reel/Tape
 FSMD100-60-2920R : 1.0K Reel/Tape
 FSMD125-2920-R~FSMD300-24-2920R : 2.0K Reel/Tape


Warning :

- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

FSMD1812 Series

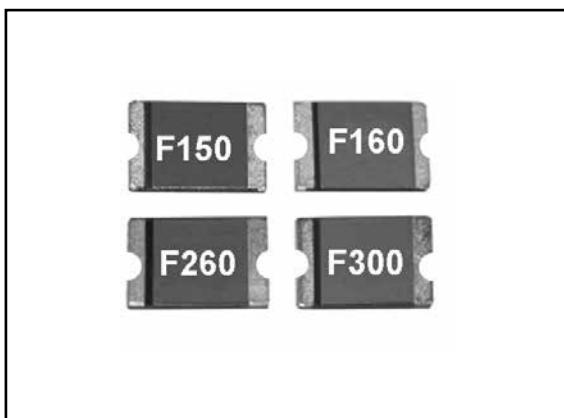

RoHS Compliant & Halogen Free

RoHS

HF

Halogen Free

Application : All high-density boards

Product Features : Small surface mount, Solid state Faster time to trip than standard SMD devices Lower resistance than standard SMD devices

Operation Current : 0.1A~3.0A

Maximum Voltage : 6V~60V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

C-UL (E211981)

TÜV (50004084/R50090556)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance	
	I _H , A	I _T , A	V _{MAX} , V _{DC}			A	Sec	R _{MIN}	R _{1MAX}
FSMD010-R	0.10	0.30	60	100	0.8	8.0	0.020	1.600	15.000
FSMD014-R	0.14	0.30	60	100	0.8	8.0	0.008	1.200	6.500
FSMD020-R	0.20	0.40	30	100	0.8	8.0	0.020	0.800	5.000
FSMD020-60-R	0.20	0.40	60	100	0.8	8.0	0.020	0.800	5.000
FSMD030-R	0.30	0.60	30	100	0.8	8.0	0.100	0.200	1.750
FSMD035-R	0.35	0.70	16	100	0.8	8.0	0.100	0.320	1.500
FSMD035-30-R	0.35	0.70	30	100	0.8	8.0	0.100	0.320	1.500
FSMD050-R	0.50	1.00	16	100	0.8	8.0	0.150	0.150	1.000
FSMD050-30-R	0.50	1.00	30	100	0.8	8.0	0.150	0.150	1.000
FSMD075-R	0.75	1.50	16	100	0.8	8.0	0.200	0.110	0.450
FSMD075-24R	0.75	1.50	24	100	1.0	8.0	0.200	0.110	0.290
FSMD075-33R	0.75	1.50	33	100	1.0	8.0	0.200	0.110	0.400
FSMD110-R	1.10	2.20	8	100	0.8	8.0	0.300	0.040	0.210
FSMD110-16-R	1.10	2.20	16	100	0.8	8.0	0.500	0.060	0.180
FSMD110-24R	1.10	2.20	24	100	1.0	8.0	0.500	0.060	0.200
FSMD110-33R	1.10	2.20	33	100	0.8	8.0	0.500	0.060	0.200
FSMD125-R	1.25	2.50	6	100	0.8	8.0	0.400	0.050	0.140
FSMD125-16R	1.25	2.50	16	100	0.8	8.0	0.400	0.050	0.140
FSMD150-R	1.50	3.00	8	100	0.8	8.0	0.500	0.040	0.110
FSMD150-12R	1.50	3.00	12	100	1.0	8.0	0.500	0.040	0.110
FSMD150-24R	1.50	3.00	24	100	1.0	8.0	1.500	0.040	0.120
FSMD160-R	1.60	3.20	8	100	0.8	8.0	0.500	0.030	0.100
FSMD160-12R	1.60	3.20	12	100	1.0	8.0	1.000	0.030	0.100
FSMD160-16R	1.60	3.20	16	100	1.0	8.0	1.000	0.030	0.100
FSMD200R	2.00	3.50	8	100	1.0	8.0	2.000	0.020	0.070
FSMD200-16R	2.00	3.50	16	100	1.0	8.0	5.000	0.020	0.085
FSMD260R	2.60	5.00	8	100	1.0	8.0	2.500	0.015	0.047
FSMD260-13R	2.60	5.00	13.2	100	1.3	8.0	5.000	0.015	0.050
FSMD260-16R	2.60	5.00	16	100	1.3	8.0	5.000	0.015	0.050
FSMD300R	3.00	5.00	6	100	1.0	8.0	4.000	0.012	0.040

Termination pad characteristics

Termination pad materials : Pure Tin


Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	116%	100%	91%	84%	78%	69%	61%	50%

III - Product - Surface Mount PTC



FSMD1812 Product Dimensions (mm)

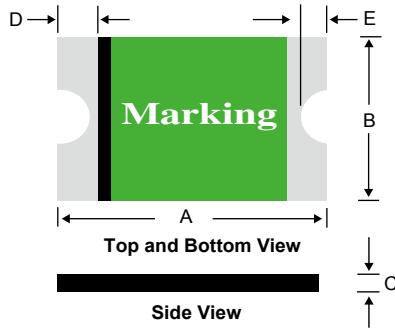


*For Reflow Soldering Profile information, please refer to P.76 " IV APPENDIX - SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS "

Part Number	A		B		C		D		E	
	Min.	Max.								
FSMD010-R	4.37	4.73	3.07	3.41	0.60	0.90	0.30	0.95	0.25	0.65
FSMD014-R	4.37	4.73	3.07	3.41	0.60	0.90	0.30	0.95	0.25	0.65
FSMD020-R	4.37	4.73	3.07	3.41	0.60	0.90	0.30	0.95	0.25	0.65
FSMD020-60-R	4.37	4.73	3.07	3.41	0.60	0.90	0.30	0.95	0.25	0.65
FSMD030-R	4.37	4.73	3.07	3.41	0.40	0.70	0.30	0.95	0.25	0.65
FSMD035-R	4.37	4.73	3.07	3.41	0.40	0.70	0.30	0.95	0.25	0.65
FSMD035-30-R	4.37	4.73	3.07	3.41	0.40	0.70	0.30	0.95	0.25	0.65
FSMD050-R	4.37	4.73	3.07	3.41	0.35	0.65	0.30	0.95	0.25	0.65
FSMD050-30-R	4.37	4.73	3.07	3.41	0.45	0.75	0.30	0.95	0.25	0.65
FSMD075-R	4.37	4.73	3.07	3.41	0.35	0.65	0.30	0.95	0.25	0.65
FSMD075-24R	4.37	4.73	3.07	3.41	0.80	1.55	0.25	0.95	0.25	0.65
FSMD075-33R	4.37	4.73	3.07	3.41	0.80	1.55	0.25	0.95	0.25	0.65
FSMD110-R	4.37	4.73	3.07	3.41	0.25	0.55	0.30	0.95	0.25	0.65
FSMD110-16-R	4.37	4.73	3.07	3.41	0.25	0.90	0.30	0.95	0.25	0.65
FSMD110-24R	4.37	4.73	3.07	3.41	0.80	1.30	0.25	0.95	0.25	0.65
FSMD110-33R	4.37	4.73	3.07	3.41	0.80	1.30	0.25	0.95	0.25	0.65
FSMD125-R	4.37	4.73	3.07	3.41	0.25	0.55	0.30	0.95	0.25	0.65
FSMD125-16R	4.37	4.73	3.07	3.41	0.50	1.00	0.30	0.95	0.25	0.65
FSMD150-R	4.37	4.73	3.07	3.41	0.25	0.55	0.30	0.95	0.25	0.65
FSMD150-12R	4.37	4.73	3.07	3.41	0.60	1.10	0.25	0.95	0.25	0.65
FSMD150-24R	4.37	4.73	3.07	3.41	0.60	1.55	0.25	0.95	0.25	0.65
FSMD160-R	4.37	4.73	3.07	3.41	0.25	0.90	0.30	0.95	0.25	0.65
FSMD160-12R	4.37	4.73	3.07	3.41	0.60	1.35	0.25	0.95	0.25	0.65
FSMD160-16R	4.37	4.73	3.07	3.41	0.60	1.35	0.25	0.95	0.25	0.65
FSMD200R	4.37	4.73	3.07	3.41	0.55	1.20	0.25	0.95	0.25	0.65
FSMD200-16R	4.37	4.73	3.07	3.41	0.60	1.55	0.25	0.95	0.25	0.65
FSMD260R	4.37	4.73	3.07	3.41	0.55	1.20	0.25	0.95	0.25	0.65
FSMD260-13R	4.37	4.73	3.07	3.41	0.80	1.55	0.25	0.95	0.25	0.65
FSMD260-16R	4.37	4.73	3.07	3.41	0.80	1.55	0.25	0.95	0.25	0.65
FSMD300R	4.37	4.73	3.07	3.41	0.80	1.55	0.25	0.95	0.25	0.65

Typical Time-To-Trip at 23°C

- A = FSMD010-R
- B = FSMD014-R
- C = FSMD020-R / FSMD020-60-R
- D = FSMD030-R
- E = FSMD035-R / FSMD035-30-R
- F = FSMD050-R / FSMD050-30-R
- G = FSMD075-R / 075-24R/075-33R
- H = FSMD110-R / 110-16-R/110-24R/110-33R
- I = FSMD125-R / 125-16R
- J = FSMD150-R / 150-12R /150-24R
- K = FSMD160-R / 160-12R/160-16R
- L = FSMD200R / 200-16R
- M = FSMD260R / 260-13R / 260-16R
- N = FSMD300R

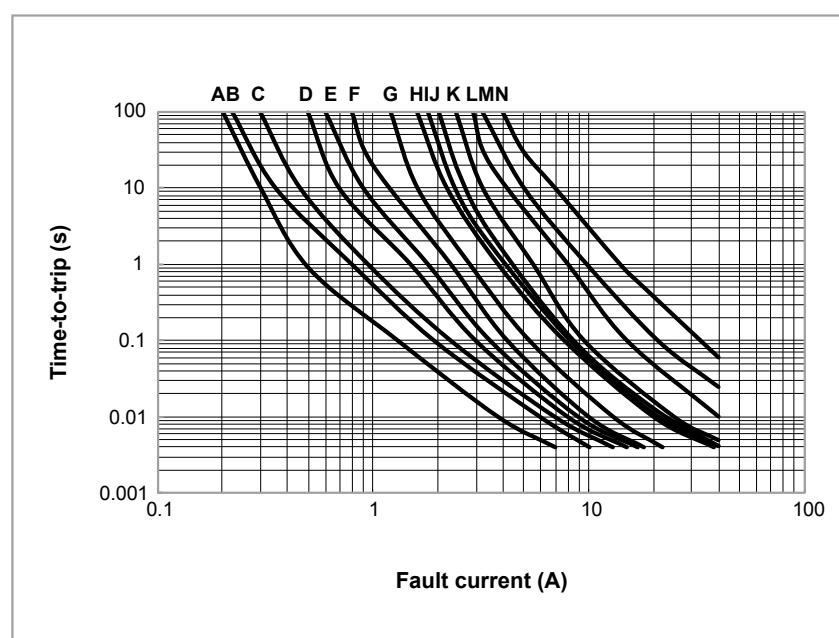

III - Product - Surface Mount PTC




Part Numbering System


F S M D □ □ □ - R



Part Marking System




Example




Part Identification
Fuzetec Logo

OR


F S M D □ □ □ - □ □ - R

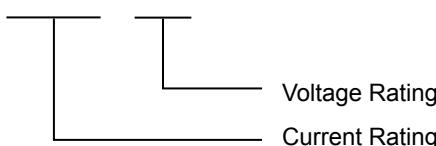

Voltage Rating
Current Rating



Example



Part Identification
Fuzetec Logo

Standard Package

FSMD010-R~FSMD075-R	: 2.0K Reel/Tape
FSMD075-24R~FSMD075-33R	: 1.5K Reel/Tape
FSMD110-R~FSMD110-16-R	: 2.0K Reel/Tape
FSMD110-24R~FSMD110-33R	: 1.5K Reel/Tape
FSMD125-R	: 2.0K Reel/Tape
FSMD125-16R	: 1.5K Reel/Tape
FSMD150-R~FSMD260R	: 2.0K Reel/Tape
FSMD260-13R~FSMD300R	: 1.5K Reel/Tape

Warning :

- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.



FSMD1210 Series



RoHS Compliant & Halogen Free

RoHS



Halogen Free

Application : All high-density boards

Product Features : Small surface mount, Solid state
Faster time to trip than standard SMD devices Lower
resistance than standard SMD devices

Operation Current : 0.05A~2.00A

Maximum Voltage : 6V~60V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

C-UL (E211981)

TÜV (R50090556)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance	
	I _H , A	I _T , A	V _{MAX} , V _{DC}			A	Sec	R _{MIN}	R _{1MAX}
FSMD005-1210-R	0.05	0.15	60	100	0.60	0.25	1.50	3.600	50.000
FSMD010-1210-R	0.10	0.25	60	100	0.60	0.50	1.50	1.600	15.000
FSMD020-1210-R	0.20	0.40	30	100	0.60	8.00	0.02	0.800	5.000
FSMD035-1210-R	0.35	0.70	16	100	0.60	8.00	0.20	0.320	1.300
FSMD050-1210-R	0.50	1.00	16	100	0.60	8.00	0.10	0.250	0.900
FSMD075-1210-R	0.75	1.50	8	100	0.60	8.00	0.10	0.130	0.400
FSMD075-24-1210R	0.75	1.50	24	100	0.60	8.00	0.10	0.130	0.400
FSMD110-1210R	1.10	2.20	8	100	0.80	8.00	0.30	0.060	0.210
FSMD110-16-1210R	1.10	2.20	16	100	0.80	8.00	0.30	0.060	0.210
FSMD150-1210R	1.50	3.00	6	100	0.80	8.00	0.50	0.040	0.110
FSMD175-1210R	1.75	4.00	6	100	0.80	8.00	0.60	0.020	0.080
FSMD200-1210R	2.00	4.00	6	100	0.80	8.00	1.00	0.015	0.070


Termination pad characteristics

Termination pad materials : Pure Tin

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	92%	83%	76%	70%	62%	50%

FSMD1210 Product Dimensions (mm)

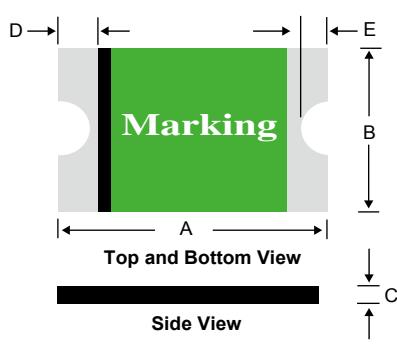


Part Number	A		B		C		D		E	
	Min.	Max.								
FSMD005-1210-R	3.00	3.43	2.35	2.80	0.60	1.15	0.25	0.75	0.10	0.45
FSMD010-1210-R	3.00	3.43	2.35	2.80	0.60	1.15	0.25	0.75	0.10	0.45
FSMD020-1210-R	3.00	3.43	2.35	2.80	0.40	0.85	0.25	0.75	0.10	0.45
FSMD035-1210-R	3.00	3.43	2.35	2.80	0.40	0.80	0.25	0.75	0.10	0.45
FSMD050-1210-R	3.00	3.43	2.35	2.80	0.30	0.75	0.25	0.75	0.10	0.45
FSMD075-1210-R	3.00	3.43	2.35	2.80	0.30	0.70	0.25	0.75	0.10	0.45
FSMD075-24-1210R	3.00	3.43	2.35	2.80	0.80	1.20	0.25	0.75	0.10	0.45
FSMD110-1210R	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.45
FSMD110-16-1210R	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.45
FSMD150-1210R	3.00	3.43	2.35	2.80	0.50	0.90	0.25	0.75	0.10	0.45
FSMD175-1210R	3.00	3.43	2.35	2.80	0.80	1.40	0.25	0.75	0.10	0.45
FSMD200-1210R	3.00	3.43	2.35	2.80	0.80	1.40	0.25	0.75	0.10	0.45

*For Reflow Soldering Profile information, please refer to P.76 “ IV APPENDIX – SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”


Typical Time-To-Trip at 23°C

A = FSMD005-1210-R
B = FSMD010-1210-R
C = FSMD020-1210-R
D = FSMD035-1210-R
E = FSMD050-1210-R
F = FSMD075-1210-R/ 075-24-1210R
G = FSMD110-1210R/ 110-16-1210R
H = FSMD150-1210R
I = FSMD175-1210R
J = FSMD200-1210R

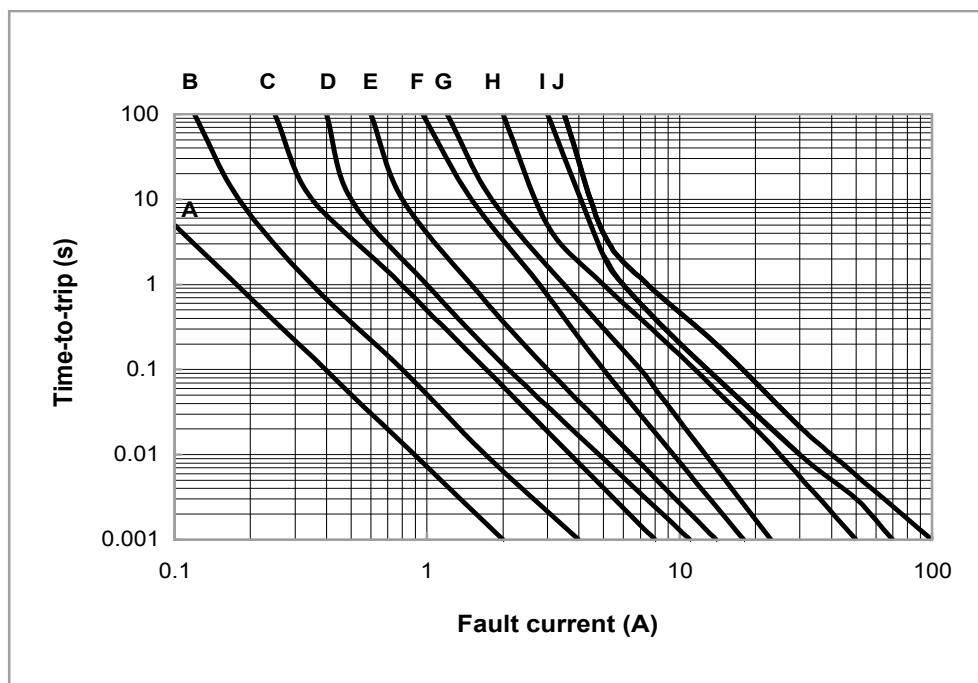


Part Numbering System


FSMD □ □ □ - □ □ - 1210 - R

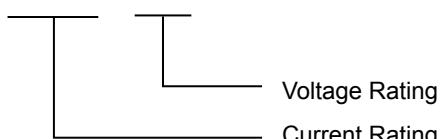


Part Marking System




Example



Part Identification
Fuzetec Logo



Example




Part Identification
Fuzetec Logo

Standard Package

FSMD005-1210-R~FSMD020-1210-R : 3.0K Reel/Tape
 FSMD035-1210-R~FSMD075-1210-R : 4.0K Reel/Tape
 FSMD075-24-1210R~FSMD200-1210R : 3.0K Reel/Tape

- Warning :**
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 - PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 - Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

FSMD1206 Series

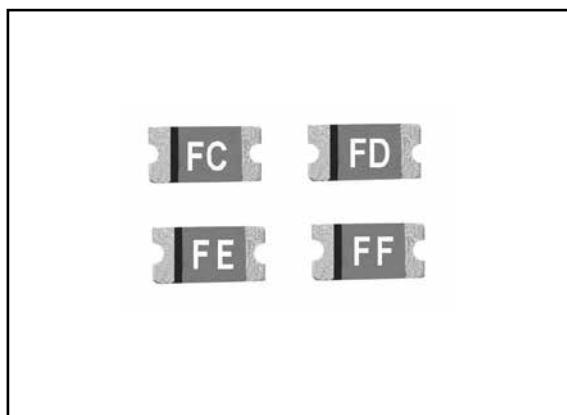

RoHS Compliant & Halogen Free

RoHS

HF

Halogen Free

Application : All high-density boards

Product Features : Small surface mount, Solid state

Faster time to trip than standard SMD devices

Lower resistance than standard SMD devices

Operation Current : 0.05A~2.00A

Maximum Voltage : 6V~60V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

C-UL (E211981)

TÜV (R50090556)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance	
	I _H , A	I _T , A	V _{MAX} , V _{DC}			A	Sec	R _{MIN}	R _{1MAX}
FSMD005-1206-R	0.05	0.15	60	100	0.4	0.25	1.50	3.600	50.000
FSMD010-1206-R	0.10	0.25	60	100	0.4	0.50	1.00	1.600	15.000
FSMD012-1206-R	0.12	0.39	48	100	0.6	1.00	0.20	1.400	6.500
FSMD016-1206-R	0.16	0.45	48	100	0.6	1.00	0.30	1.100	5.000
FSMD020-1206-R	0.20	0.40	30	100	0.4	8.00	0.10	0.600	2.500
FSMD025-1206-R	0.25	0.50	16	100	0.6	8.00	0.08	0.550	2.300
FSMD025-24-1206-R	0.25	0.50	24	100	0.6	8.00	0.08	0.550	2.300
FSMD035-1206-R	0.35	0.75	16	100	0.4	8.00	0.10	0.300	1.200
FSMD035-30-1206R	0.35	0.75	30	100	0.6	8.00	0.10	0.300	1.200
FSMD050-1206-R	0.50	1.00	8	100	0.4	8.00	0.10	0.150	0.700
FSMD050-24-1206R	0.50	1.00	24	100	0.6	8.00	0.10	0.150	0.750
FSMD075-1206R	0.75	1.50	8	100	0.6	8.00	0.20	0.090	0.290
FSMD075-16-1206R	0.75	1.50	16	100	0.6	8.00	0.20	0.090	0.290
FSMD100-1206R	1.00	1.80	6	100	0.6	8.00	0.30	0.055	0.210
FSMD110-1206R	1.10	2.20	8	100	0.8	8.00	0.30	0.040	0.180
FSMD110-16-1206R	1.10	2.20	16	100	0.8	8.00	0.30	0.040	0.180
FSMD150-1206R	1.50	3.00	8	100	0.8	8.00	1.00	0.040	0.120
FSMD200-1206R	2.00	3.50	6	100	0.8	8.00	1.50	0.018	0.080


Termination pad characteristics

Termination pad materials : Pure Tin

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	92%	84%	78%	69%	62%	50%

FSMD1206 Product Dimensions (mm)

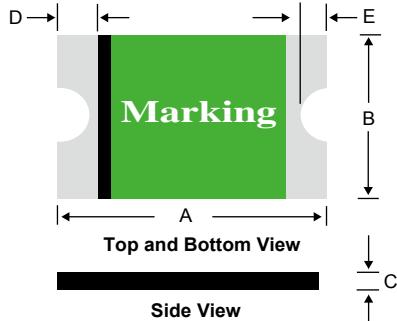


*For Reflow Soldering Profile information, please refer to P.76 " IV APPENDIX - SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS "

Part Number	A		B		C		D		E	
	Min.	Max.								
FSMD005-1206-R	3.00	3.50	1.50	1.80	0.45	0.85	0.10	0.75	0.10	0.45
FSMD010-1206-R	3.00	3.50	1.50	1.80	0.45	0.85	0.10	0.75	0.10	0.45
FSMD012-1206-R	3.00	3.50	1.50	1.80	0.45	0.85	0.10	0.75	0.10	0.45
FSMD016-1206-R	3.00	3.50	1.50	1.80	0.45	0.75	0.10	0.75	0.10	0.45
FSMD020-1206-R	3.00	3.50	1.50	1.80	0.45	0.75	0.10	0.75	0.10	0.45
FSMD025-1206-R	3.00	3.50	1.50	1.80	0.45	0.75	0.10	0.75	0.10	0.45
FSMD025-24-1206-R	3.00	3.50	1.50	1.80	0.45	0.75	0.10	0.75	0.10	0.45
FSMD035-1206-R	3.00	3.50	1.50	1.80	0.30	0.75	0.10	0.75	0.10	0.45
FSMD035-30-1206R	3.00	3.50	1.50	1.80	0.90	1.30	0.25	0.75	0.10	0.45
FSMD050-1206-R	3.00	3.50	1.50	1.80	0.25	0.55	0.10	0.75	0.10	0.45
FSMD050-24-1206R	3.00	3.50	1.50	1.80	0.80	1.20	0.25	0.75	0.10	0.45
FSMD075-1206R	3.00	3.50	1.50	1.80	0.45	1.25	0.25	0.75	0.10	0.45
FSMD075-16-1206R	3.00	3.50	1.50	1.80	0.45	1.25	0.25	0.75	0.10	0.45
FSMD100-1206R	3.00	3.50	1.50	1.80	0.45	1.00	0.25	0.75	0.10	0.45
FSMD110-1206R	3.00	3.50	1.50	1.80	0.45	1.00	0.25	0.75	0.10	0.45
FSMD110-16-1206R	3.00	3.50	1.50	1.80	0.80	1.40	0.25	0.75	0.10	0.45
FSMD150-1206R	3.00	3.50	1.50	1.80	0.80	1.40	0.25	0.75	0.10	0.45
FSMD200-1206R	3.00	3.50	1.50	1.80	0.85	1.60	0.25	0.75	0.10	0.45


Typical Time-To-Trip at 23°C

- Z = FSMD005-1206-R
- A = FSMD010-1206-R
- B = FSMD012-1206-R
- C = FSMD016-1206-R
- D = FSMD020-1206-R
- E = FSMD025-1206-R/025-24-1206-R
- F = FSMD035-1206-R/035-60-1206R
- G = FSMD050-1206-R/FSMD050-24-1206R
- H = FSMD075-1206R / FSMD075-16-1206
- I = FSMD100-1206R
- J = FSMD110-1206R/110-16-1206R
- K = FSMD150-1206R
- L = FSMD200-1206R


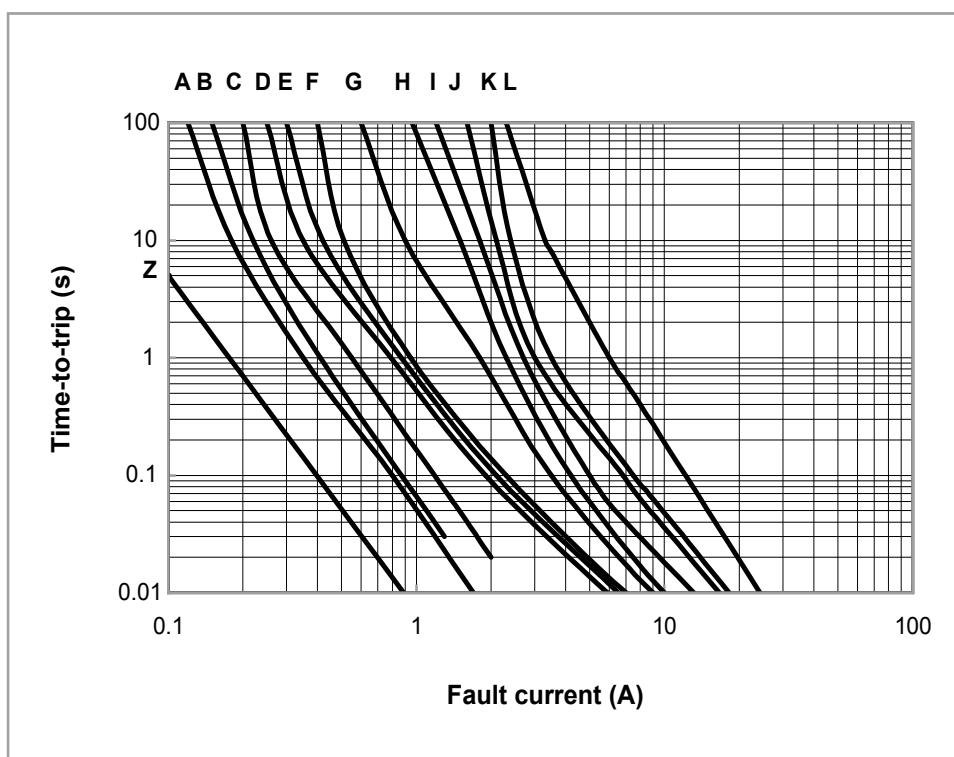


Part Numbering System

FSMD □ □ □ — □ □ - 1206 - R

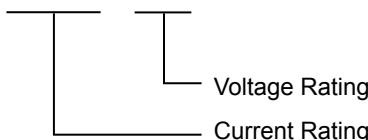

Part Marking System

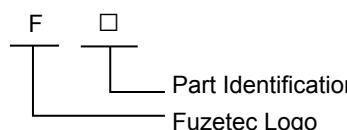

FZ	= FSMD005-1206-R
FA	= FSMD010-1206-R
FJ	= FSMD012-1206-R
FK	= FSMD016-1206-R
FB	= FSMD020-1206-R
FL	= FSMD025-1206-R
FP	= FSMD025-24-1206-R
FC	= FSMD035-1206-R
FM	= FSMD035-30-1206R
FD	= FSMD050-1206-R
FN	= FSMD050-24-1206R
FE	= FSMD075-1206R
FO	= FSMD075-16-1206R
FF	= FSMD100-1206R
FG	= FSMD110-1206R
FQ	= FSMD110-16-1206R
FH	= FSMD150-1206R
FI	= FSMD200-1206R

Standard Package


FSMD005-1206-R~ FSMD025-24-1206-R : 3.0K Reel/Tape
 FSMD035-1206-R : 4.0K Reel/Tape
 FSMD035-30-1206R : 3.0K Reel/Tape
 FSMD050-1206-R : 4.0K Reel/Tape
 FSMD050-24-1206R~FSMD110-1206R : 3.0K Reel/Tape
 FSMD110-16-1206R~FSMD200-1206R : 2.0K Reel/Tape

Warning :

- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.



FSMD0805 Series

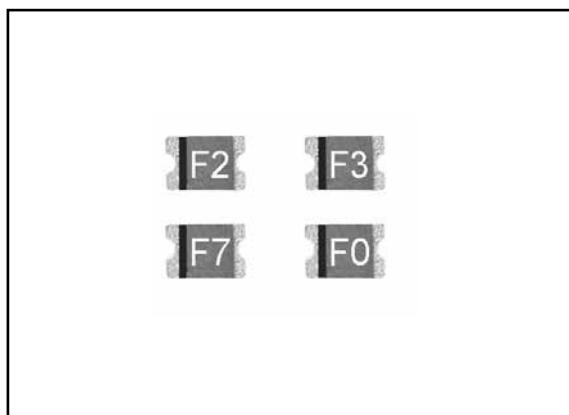

RoHS Compliant & Halogen Free

RoHS

HF

Halogen Free

Application : All high-density boards

Product Features : Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices

Operation Current : 0.1A~1.0A

Maximum Voltage : 6V~15V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

C-UL (E211981)

TÜV (R50090556)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance	
	I _H , A	I _T , A	V _{MAX} , V _{DC}			A	Sec	R _{MIN}	R _{1MAX}
FSMD010-0805-R	0.10	0.30	15	100	0.5	0.50	1.50	0.700	6.000
FSMD020-0805-R	0.20	0.50	9	100	0.5	8.00	0.02	0.400	3.500
FSMD035-0805-R	0.35	0.75	6	100	0.5	8.00	0.10	0.250	1.200
FSMD050-0805R	0.50	1.00	6	100	0.5	8.00	0.10	0.150	0.850
FSMD050-9-0805R	0.50	1.00	9	100	0.5	8.00	0.10	0.150	0.850
FSMD075-0805R	0.75	1.50	6	100	0.6	8.00	0.20	0.090	0.350
FSMD100-0805R	1.00	1.95	6	100	0.6	8.00	0.30	0.060	0.210


Termination pad characteristics

Termination pad materials : Pure Tin

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	116%	100%	91%	84%	76%	69%	61%	50%

FSMD0805 Product Dimensions (mm)

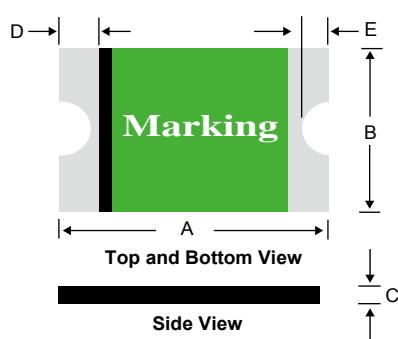


Part Number	A		B		C		D		E	
	Min.	Max.								
FSMD010-0805-R	2.00	2.30	1.20	1.50	0.30	1.00	0.20	0.60	0.10	0.45
FSMD020-0805-R	2.00	2.30	1.20	1.50	0.30	1.00	0.20	0.60	0.10	0.45
FSMD035-0805-R	2.00	2.30	1.20	1.50	0.25	0.75	0.20	0.60	0.10	0.45
FSMD050-0805R	2.00	2.30	1.20	1.50	0.55	1.25	0.20	0.60	0.10	0.45
FSMD050-9-0805R	2.00	2.30	1.20	1.50	0.55	1.25	0.20	0.60	0.10	0.45
FSMD075-0805R	2.00	2.30	1.20	1.50	0.55	1.25	0.20	0.60	0.10	0.45
FSMD100-0805R	2.00	2.30	1.20	1.50	0.75	1.80	0.20	0.60	0.10	0.45

*For Reflow Soldering Profile information, please refer to P.76 “ IV APPENDIX – SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”


Typical Time-To-Trip at 23°C

A = FSMD010-0805-R
B = FSMD020-0805-R
C = FSMD035-0805-R
D = FSMD050-0805R/
FSMD050-9-0805R
E = FSMD075-0805R
F = FSMD100-0805R

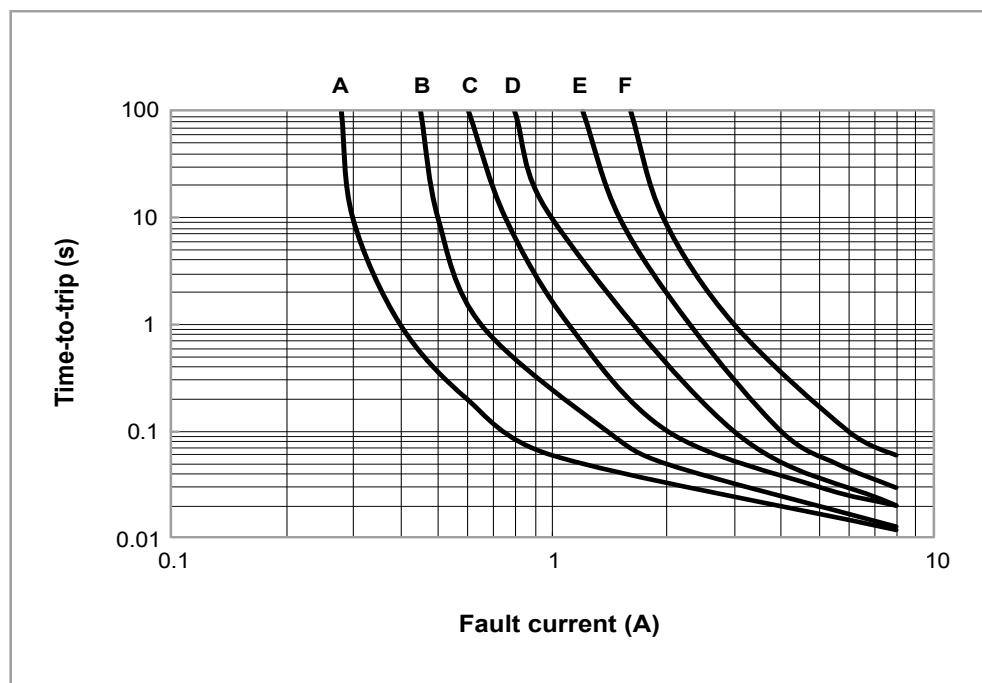


Part Numbering System

FSMD □ □ □ - □ - 0805 - R

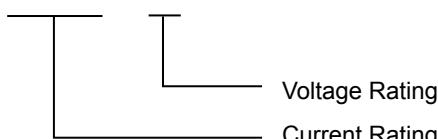

Part Marking System

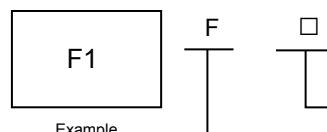

Part Identification
Fuzetec Logo

F1 = FSMD010-0805-R
F2 = FSMD020-0805-R
F3 = FSMD035-0805-R
F5 = FSMD050-0805R
FA = FSMD050-9-0805R
F7 = FSMD075-0805R
F0 = FSMD100-0805R


Standard Package

FSMD010-0805-R~FSMD035-0805-R : 4.0K Reel/Tape
 FSMD050-0805R~FSMD100-0805R : 3.0K Reel/Tape

Warning :

- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

FSMD0603 Series

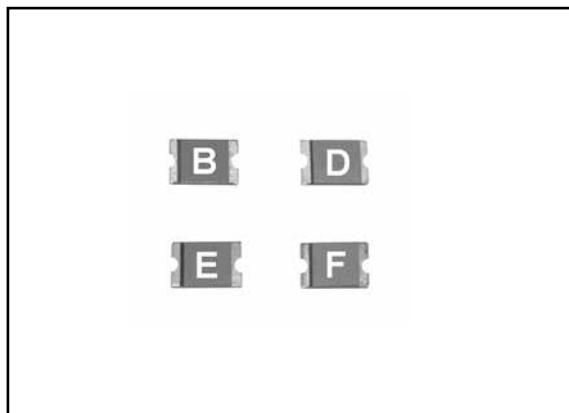

RoHS Compliant & Halogen Free

RoHS

HF

Halogen Free

Application : All high-density boards

Product Features : Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices

Operation Current : 0.01A~0.20A

Maximum Voltage : 9V~60V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

C-UL (E211981)

TÜV (R50090556)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance	
	I _H , A	I _T , A	V _{MAX} , V _{DC}			A	Sec	R _{MIN}	R _{1MAX}
FSMD001-0603-R	0.01	0.03	60	40	0.5	0.20	1.00	15.00	100.00
FSMD002-0603-R	0.02	0.06	60	40	0.5	0.20	1.00	12.00	70.00
FSMD003-0603-R	0.03	0.09	30	40	0.5	0.20	1.00	6.00	50.00
FSMD004-0603-R	0.04	0.12	24	40	0.5	0.20	1.00	4.00	40.00
FSMD005-0603-R	0.05	0.15	15	40	0.5	0.50	0.10	3.80	30.00
FSMD010-0603-R	0.10	0.25	15	40	0.5	0.70	0.10	0.90	8.00
FSMD012-0603-R	0.12	0.30	9	40	0.5	0.80	0.10	1.10	5.80
FSMD016-0603-R	0.16	0.40	9	40	0.5	1.00	0.10	1.00	4.20
FSMD020-0603-R	0.20	0.45	9	40	0.5	2.00	0.10	0.55	3.50


Termination pad characteristics

Termination pad materials : Pure Tin

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	157%	137%	118%	100%	89%	80%	70%	60%	51%	37%

FSMD0603 Product Dimensions (mm)

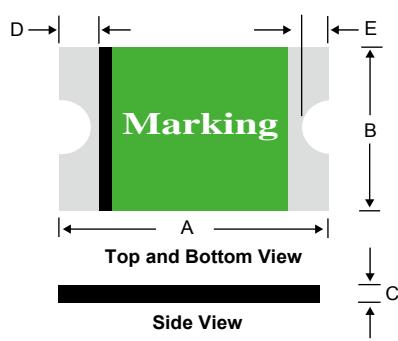


Part Number	A		B		C		D		E	
	Min	Max								
FSMD001-0603-R	1.40	1.80	0.45	1.00	0.35	0.85	0.10	0.50	0.08	0.40
FSMD002-0603-R	1.40	1.80	0.45	1.00	0.35	0.85	0.10	0.50	0.08	0.40
FSMD003-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40
FSMD004-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40
FSMD005-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40
FSMD010-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40
FSMD012-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40
FSMD016-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40
FSMD020-0603-R	1.40	1.80	0.45	1.00	0.35	0.75	0.10	0.50	0.08	0.40

*For Reflow Soldering Profile information, please refer to P.76 “ IV APPENDIX – SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”

Typical Time-To-Trip at 23°C

A = FSMD001-0603-R
B = FSMD002-0603-R
C = FSMD003-0603-R
D = FSMD004-0603-R
E = FSMD005-0603-R
F = FSMD010-0603-R
G = FSMD012-0603-R
H = FSMD016-0603-R
I = FSMD020-0603-R

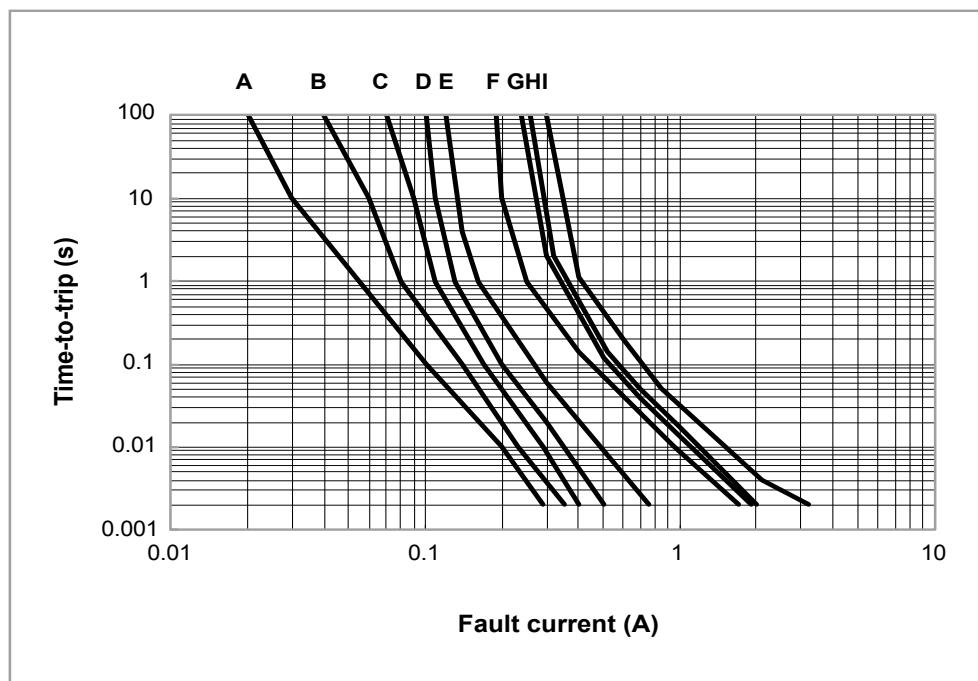


Part Numbering System

F S M D □ □ □ - 0603 - R



Part Marking System



Part Identification

X = FSMD001-0603-R
Y = FSMD002-0603-R
Z = FSMD003-0603-R
A = FSMD004-0603-R
B = FSMD005-0603-R
D = FSMD010-0603-R
E = FSMD012-0603-R
F = FSMD016-0603-R
G = FSMD020-0603-R


Standard Package

FSMD001-0603-R~FSMD020-0603-R : 4.0K Reel/Tape

Warning :

- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

STRAP Series

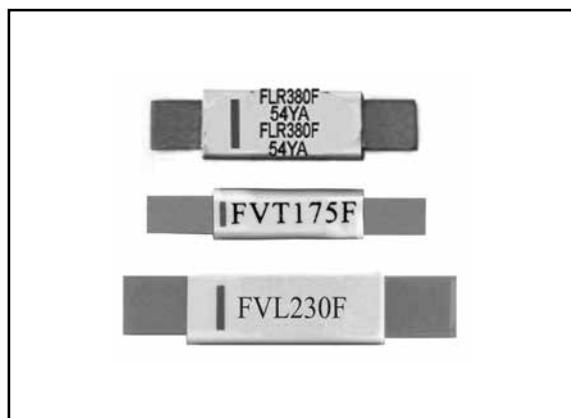

RoHS Compliant & Halogen Free

RoHS

HF
Halogen Free

Application : Rechargeable battery packs, Lithium cell and battery packs

Product Features : Low profile, Solid state

Operation Current :

FVL Series 1.7A~2.3A ; FVT Series 1.1A~2.4A

FLR Series 1.9A~7.3A ; FSR Series 1.2A~4.2A

Maximum Voltage : 12V ~ 30V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

C-UL (E211981)

TÜV (R50004084)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip at 5xI _H , S	Rated Voltage V _{MAX} , V _{DC}	Max. Current I _{MAX} , A	Typ. Power P _d , W	Resistance		
	I _H , A	I _T , A					R _{MIN}	R _{MAX}	R _{1MAX}
FVL170F	1.70	4.10	5.0	12	100	1.4	0.018	0.032	0.064
FVL175F	1.75	4.20	5.0	12	100	1.4	0.017	0.031	0.062
FVL230F	2.30	5.00	5.0	12	100	1.4	0.012	0.018	0.036
FVT110F	1.10	2.70	5.0	16	100	0.7	0.038	0.070	0.140
FVT170F	1.70	3.40	5.0	16	100	0.7	0.030	0.052	0.105
FVT175F	1.75	3.60	5.0	16	100	0.8	0.029	0.051	0.102
FVT200F	2.00	4.70	5.0	16	100	0.9	0.022	0.039	0.078
FVT210GF	2.10	4.70	5.0	16	100	1.2	0.018	0.030	0.060
FVT240F	2.40	5.90	5.0	16	100	1.0	0.014	0.026	0.052
FSR120F	1.20	2.70	5.0	15	100	1.2	0.085	0.160	0.220
FSR175F	1.75	3.80	5.0	15	100	1.5	0.050	0.090	0.120
FSR200F	2.00	4.40	4.0	30	100	1.9	0.030	0.060	0.100
FSR350F	3.50	6.30	3.0	30	100	2.5	0.017	0.031	0.050
FSR420F	4.20	7.60	6.0	30	100	2.9	0.012	0.024	0.040
FLR190F	1.90	3.90	5.0	15	100	1.2	0.039	0.072	0.102
FLR260F	2.60	5.80	5.0	15	100	2.5	0.020	0.042	0.063
FLR380F	3.80	8.30	5.0	15	100	2.5	0.013	0.026	0.037
FLR450F	4.50	8.90	5.0	20	100	2.5	0.011	0.020	0.028
FLR550F	5.50	10.50	5.0	20	100	2.8	0.009	0.016	0.022
FLR600F	6.00	11.70	5.0	20	100	2.8	0.007	0.014	0.019
FLR730F	7.30	14.10	5.0	20	100	3.3	0.006	0.012	0.015

Physical specifications :

Lead material : 0.13mm nominal thickness, quarter-hard nickel.

Insulating material : Polyester tape.


Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
FVL Series	195%	163%	132%	100%	85%	68%	53%	38%	21%	-
FVT Series	172%	149%	124%	100%	90%	78%	65%	53%	41%	23%
FSR Series	152%	135%	118%	100%	90%	82%	74%	65%	56%	42%
FLR Series	147%	132%	117%	100%	94%	86%	80%	71%	61%	52%


III - Product - Axial Leaded PTC



Product Dimensions (mm)

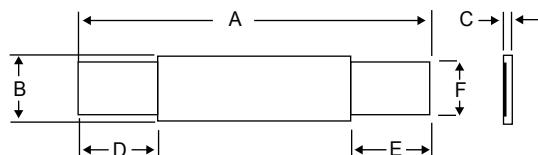

Top view
Fig.1

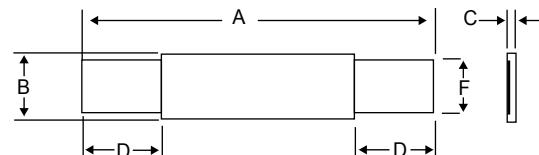


Top view
Fig.2

Part Number		A		B		C		D		E		F	
		Min.	Max.										
FVL170F	1	20.8	23.2	3.5	3.9	0.5	0.8	4.5	6.5	4.5	6.5	2.4	2.6
FVL175F	1	23.0	24.5	2.9	3.3	0.5	0.8	4.7	7.2	3.8	5.4	2.4	2.6
FVL230F	1	20.9	23.1	4.9	5.3	0.5	0.8	4.1	5.8	4.1	5.8	3.9	4.1
FVT110F	2	23.6	25.6	2.6	2.9	0.5	0.9	7.0	8.0	---	---	2.3	2.5
FVT170F	2	15.4	17.5	7.0	7.4	0.5	0.9	4.0	6.2	---	---	3.9	4.1
FVT175F	2	21.0	23.0	3.5	3.9	0.5	0.9	4.6	6.6	---	---	2.9	3.1
FVT200F	2	21.0	23.0	4.1	4.5	0.5	0.9	3.0	4.8	---	---	2.9	3.1
FVT210GF	2	21.0	23.0	4.9	5.2	0.5	0.9	4.1	5.5	---	---	3.9	4.1
FVT240F	2	23.8	26.0	4.9	5.3	0.5	0.9	3.5	5.5	---	---	3.9	4.1
FSR120F	2	19.9	22.1	4.9	5.2	0.6	1.0	5.5	7.5	---	---	3.9	4.1
FSR175F	2	20.9	23.1	4.9	5.2	0.6	1.0	4.1	5.5	---	---	3.9	4.1
FSR200F	2	21.3	23.4	10.2	11.0	0.5	1.1	5.0	7.6	---	---	4.8	5.4
FSR350F	2	28.4	31.8	13.0	13.5	0.5	1.1	6.3	8.9	---	---	5.9	6.1
FSR420F	2	30.6	32.4	12.9	13.6	0.5	1.1	5.0	7.5	---	---	5.9	6.1
FLR190F	2	19.9	22.1	4.9	5.5	0.6	1.0	5.5	7.5	---	---	3.9	4.1
FLR260F	2	20.9	23.1	4.9	5.5	0.6	1.0	4.1	5.5	---	---	3.9	4.1
FLR380F	2	24.0	26.0	6.9	7.5	0.6	1.0	4.1	5.5	---	---	4.9	5.1
FLR450F	2	24.0	26.0	9.9	10.5	0.6	1.0	5.3	6.7	---	---	5.9	6.1
FLR550F	2	35.0	37.0	6.9	7.5	0.6	1.0	5.3	6.7	---	---	4.9	5.1
FLR600F	2	24.0	26.0	13.9	14.5	0.6	1.0	4.1	5.5	---	---	5.9	6.1
FLR730F	2	27.1	29.1	13.9	14.5	0.6	1.0	4.1	5.5	---	---	5.9	6.1

Typical Time-To-Trip at 23°C


FVL Series

A = FVL170F
B = FVL175F
C = FVL230F

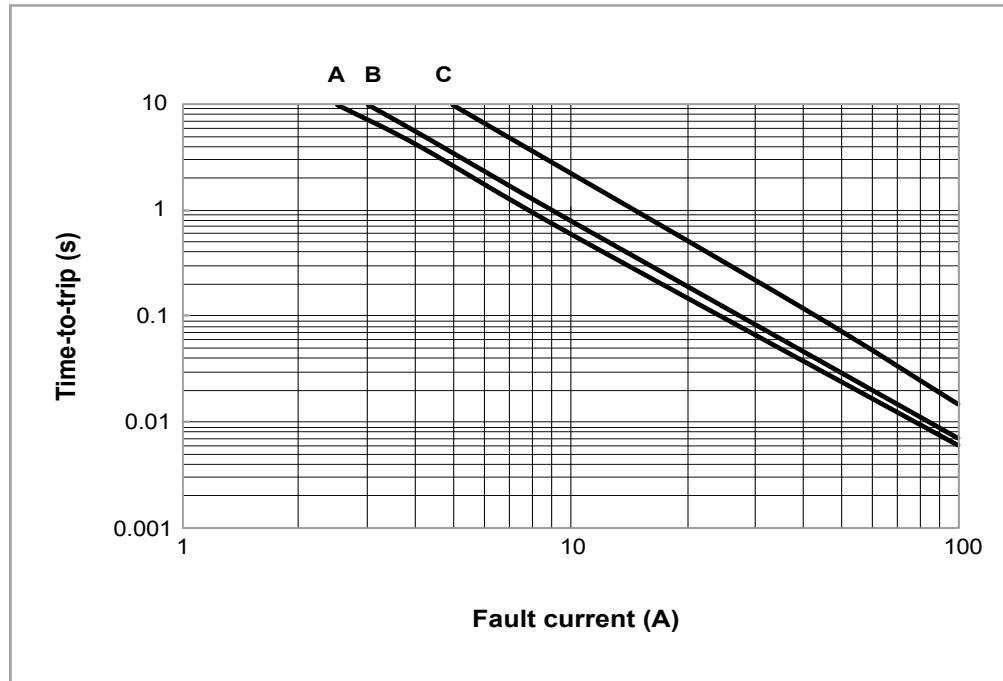


FVT Series

- A = FVT110F
- B = FVT170F
- C = FVT175F
- D = FVT200F
- E = FVT210F
- F = FVT240F

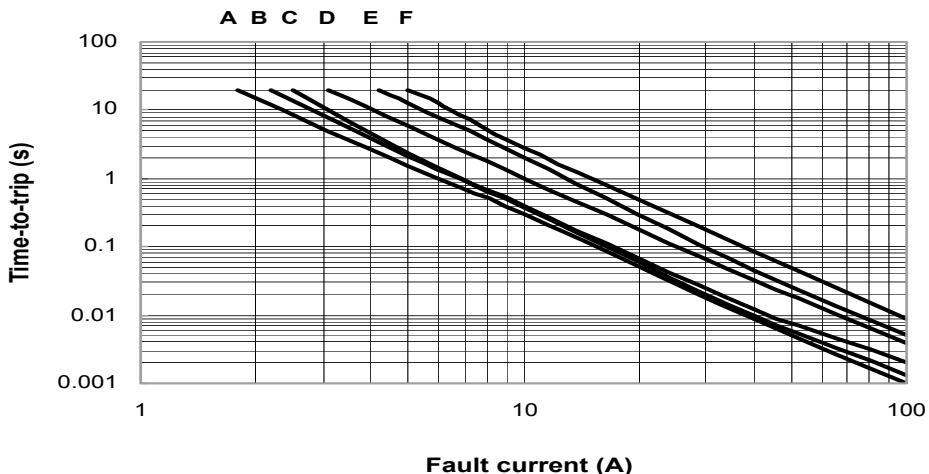


FSR Series

- A = FSR120F
- B = FSR175F
- C = FSR200F
- D = FSR350F
- E = FSR420F


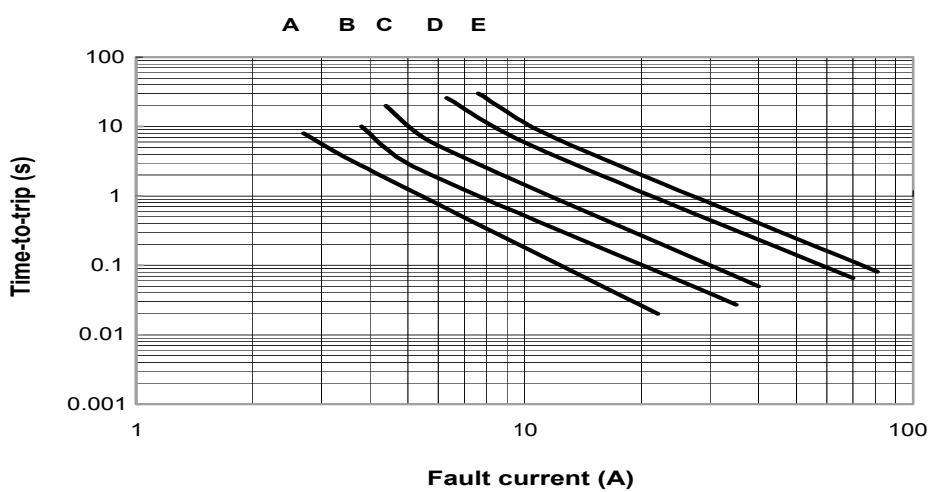


FLR Series





- A = FLR190F
- B = FLR260F
- C = FLR380F
- D = FLR450F
- E = FLR550F
- F = FLR600F
- G = FLR730F

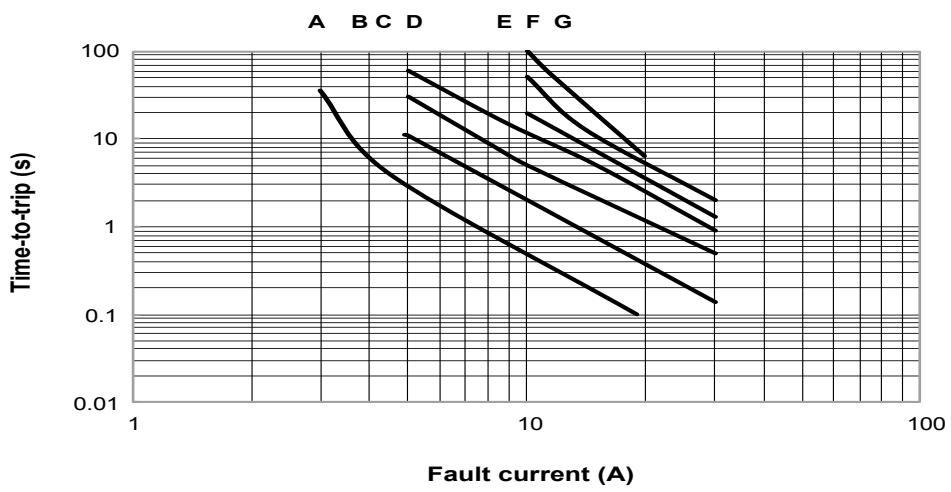

Part Numbering System

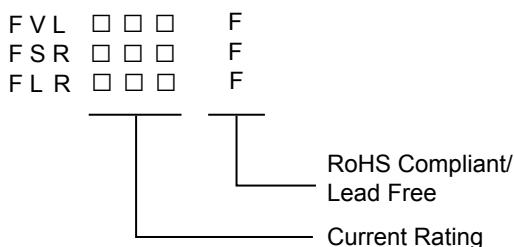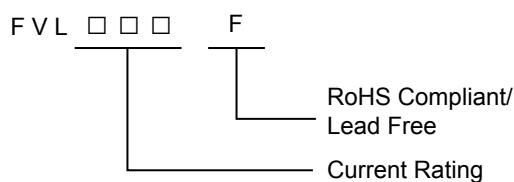

Part Marking System

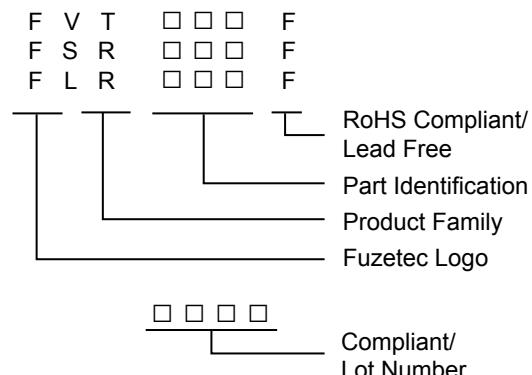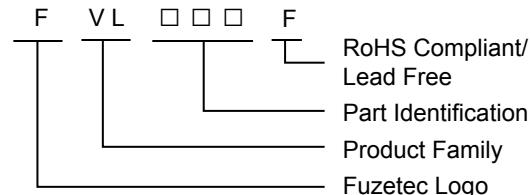

Standard Package

FVL170F~FVL175F : 1.0K Pcs/Bag
 FVT110F~FVT210GF : 1.0K Pcs/Bag
 FSR120F~FSR175F : 1.0K Pcs/Bag
 FLR190F~FLR380F : 1.0K Pcs/Bag

FVL230F : 500 Pcs/Bag
 FVT240F : 500 Pcs/Bag
 FSR200F~FSR420F : 500 Pcs/Bag
 FLR450F~FLR730F : 500 Pcs/Bag

Warning :

- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

Low Rho INTRODUCTION AND HIGHLIGHT

Low Rho PPTC Resettable Fuse takes advantage of newly developed conductive material technology and manufacturing processing capability; which offer ultra low resistance and miniature device dimension. Fuzetec is pleased to offer Low Rho PPTC device in both SMD and Strap type forms which are ideal for Portable electronics Battery protection/Protection Circuit Module (PCM), high speed data /charging USB 3.0 and other applications where compact space and flexible design are highly required.

FEATURE

- Ultra Low Resistance
- Smaller Dimension, only 1/4 of Std. Carbon PPTC.
- Less Voltage Drop (Lower Resistance)
- Higher Ihold (same dimension)
- Lower Power Consumption (Smaller Pd)


TYPICAL APPLICATION

- Portable Electronics : SMART PHONE and TABLET PC....,etc.
- USB 3.0

HOW Low Rho PPTCs BENEFIT YOUR PORTABLE ELECTRONICS?

- Longer Use/Stand by Time
- Faster Data Transmission rate
- Faster Power Charging Speed
- Low Noise on Signal/Data Transmission
- Lower Power Consumption

Low Rho FSMD1812 Series

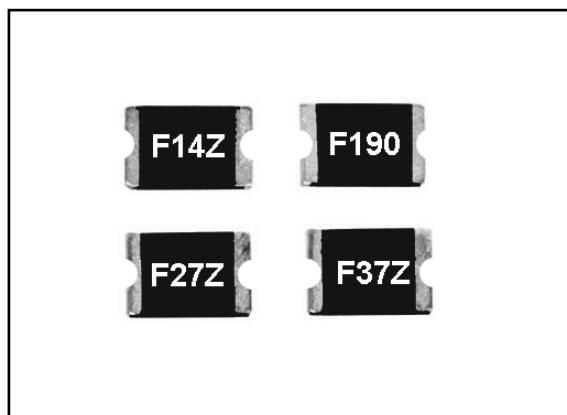

RoHS Compliant & Halogen Free

RoHS



Halogen Free

Application : All high-density boards

Product Features : Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices

Operation Current : 1.4~6.0A

Maximum Voltage : 6V

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

C-UL (E211981)

TÜV (R50090556)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance	
	I _H , A	I _T , A	V _{MAX} , V _{DC}			A	Sec	R _{MIN}	R _{1MAX}
FSMD140RZ	1.40	3.60	6	100	1.0	8.0	3.00	0.0100	0.0350
FSMD190RZ	1.90	4.90	6	100	1.0	8.0	5.00	0.0030	0.0250
FSMD270RZ	2.70	6.20	6	100	1.0	13.5	3.00	0.0030	0.0230
FSMD300RZ	3.00	7.00	6	100	1.0	15.0	2.00	0.0030	0.0220
FSMD370RZ	3.70	9.10	6	100	1.0	18.5	2.00	0.0030	0.0180
FSMD500RZ	5.00	10.00	6	100	1.0	25.0	2.00	0.0015	0.0140
FSMD600RZ	6.00	12.00	6	100	1.0	30.0	3.00	0.0010	0.0100


Termination pad characteristics

Termination pad materials : Pure Tin

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	92%	84%	77%	69%	61%	50%

Low Rho FSMD1812 Product Dimensions (mm)

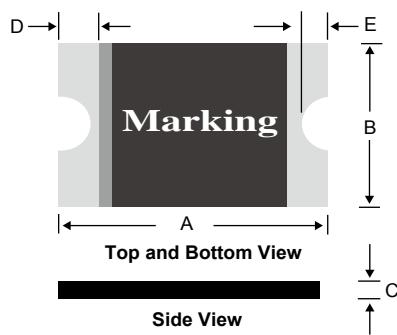


Part Number	A		B		C		D		E	
	Min.	Max.								
FSMD140RZ	4.37	4.73	3.07	3.41	0.30	0.70	0.25	0.95	0.25	0.65
FSMD190RZ	4.37	4.73	3.07	3.41	0.30	0.70	0.25	0.95	0.25	0.65
FSMD270RZ	4.37	4.73	3.07	3.41	0.30	0.70	0.25	0.95	0.25	0.65
FSMD300RZ	4.37	4.73	3.07	3.41	0.30	0.70	0.25	0.95	0.25	0.65
FSMD370RZ	4.37	4.73	3.07	3.41	0.30	0.70	0.25	0.95	0.25	0.65
FSMD500RZ	4.37	4.73	3.07	3.41	0.30	0.70	0.25	0.95	0.25	0.65
FSMD600RZ	4.37	4.73	3.07	3.41	0.30	1.00	0.25	0.95	0.25	0.65


*For Reflow Soldering Profile information, please refer to P.76 “ IV APPENDIX – SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”

Typical Time-To-Trip at 23°C


A = FSMD140RZ
B = FSMD190RZ
C = FSMD270RZ
D = FSMD300RZ
E = FSMD370RZ
F = FSMD500RZ
G = FSMD600RZ

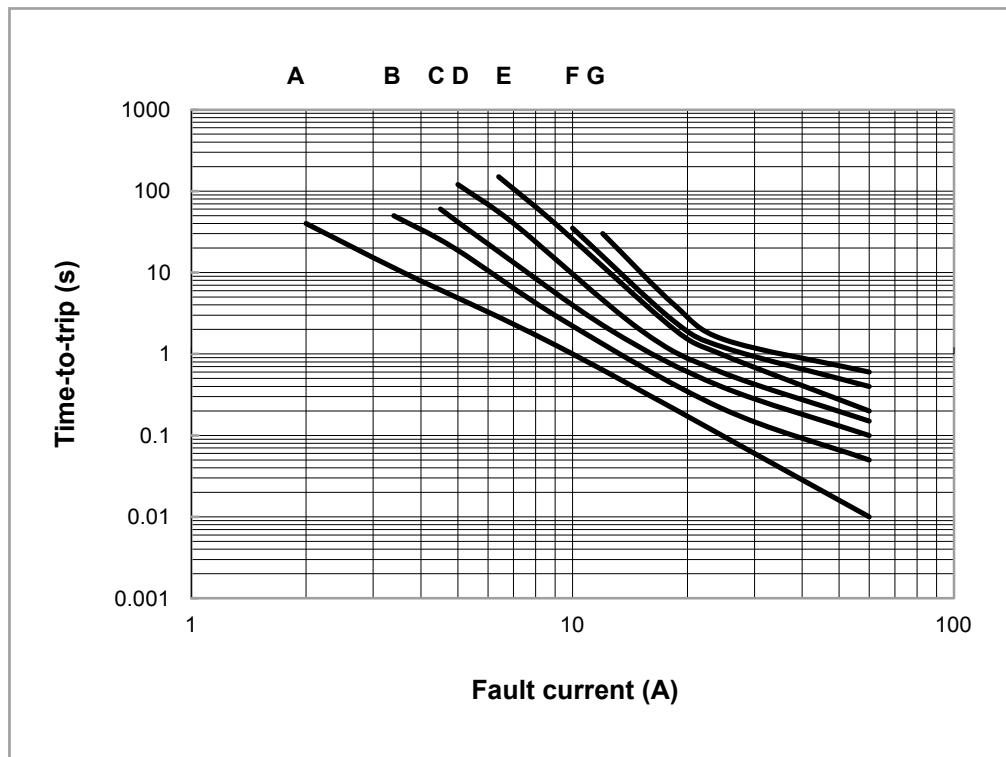

Part Numbering System

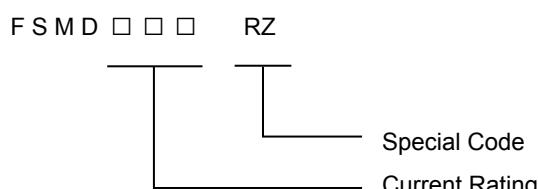

Part Marking System

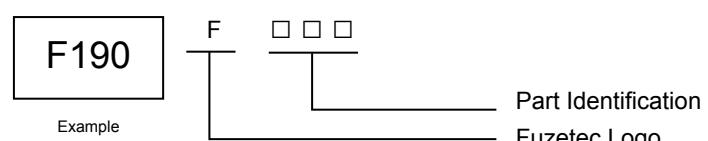


Standard Package

FSMD140RZ~ FSMD600RZ : 2.0K Reel/Tape

- Warning :**
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 - PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 - Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

Low Rho FSMD1210 Series

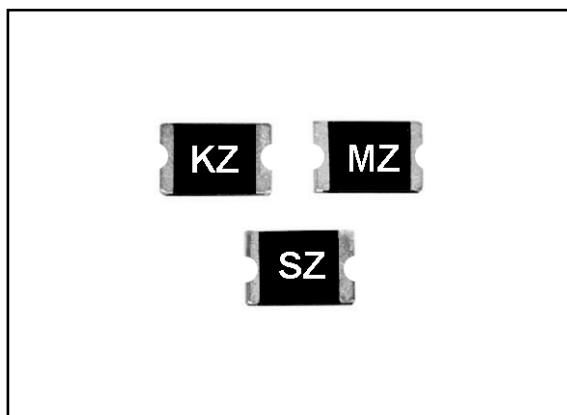

RoHS Compliant & Halogen Free

RoHS

HF

Halogen Free

Application : All high-density boards

Product Features : Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices

Operation Current : 1.75~6.50A

Maximum Voltage : 6V

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

C-UL (E211981)

TÜV (R50090556)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance	
	I _H , A	I _T , A	V _{MAX} , V _{DC}	I _{MAX} , A		A	Sec	R _{MIN}	R _{1MAX}
FSMD175-1210RZ	1.75	3.50	6	100	1.0	8.00	2.50	0.006	0.040
FSMD200-1210RZ	2.00	4.90	6	100	1.0	8.00	3.00	0.005	0.024
FSMD260-1210RZ	2.60	5.00	6	100	0.8	8.00	4.00	0.003	0.020
FSMD300-1210RZ	3.00	6.00	6	100	0.8	15.00	2.00	0.003	0.020
FSMD350-1210RZ	3.50	7.00	6	100	1.0	17.50	2.00	0.003	0.018
FSMD380-1210RZ	3.80	8.00	6	100	1.0	8.00	5.00	0.002	0.016
FSMD400-1210RZ	4.00	8.00	6	100	1.0	8.00	5.00	0.002	0.016
FSMD450-1210RZ	4.50	9.00	6	100	1.0	22.50	2.00	0.001	0.014
FSMD650-1210RZ	6.50	13.00	6	100	1.2	32.50	2.00	0.001	0.009


Termination pad characteristics

Termination pad materials : Pure Tin

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	92%	84%	77%	69%	61%	50%

Low Rho FSMD1210 Product Dimensions (mm)

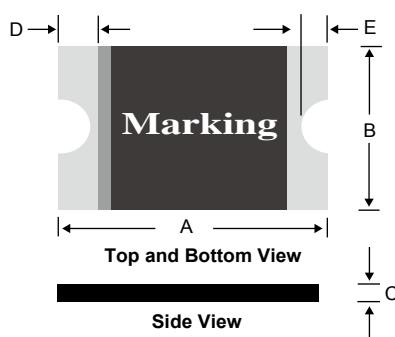


Part Number	A		B		C		D		E	
	Min.	Max.								
FSMD175-1210RZ	3.00	3.43	2.35	2.80	0.30	0.70	0.25	0.75	0.10	0.45
FSMD200-1210RZ	3.00	3.43	2.35	2.80	0.30	0.70	0.25	0.75	0.10	0.45
FSMD260-1210RZ	3.00	3.43	2.35	2.80	0.30	0.70	0.25	0.75	0.10	0.45
FSMD300-1210RZ	3.00	3.43	2.35	2.80	0.30	1.00	0.25	0.75	0.10	0.45
FSMD350-1210RZ	3.00	3.43	2.35	2.80	0.30	1.00	0.25	0.75	0.10	0.45
FSMD380-1210RZ	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.45
FSMD400-1210RZ	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.45
FSMD450-1210RZ	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.45
FSMD650-1210RZ	3.00	3.43	2.35	2.80	0.60	1.00	0.25	0.75	0.10	0.45

*For Reflow Soldering Profile information, please refer to P.76 “ IV APPENDIX – SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”


Typical Time-To-Trip at 23°C

A = FSMD175-1210RZ
B = FSMD200-1210RZ
C = FSMD260-1210RZ
D = FSMD300-1210RZ
E = FSMD350-1210RZ
F = FSMD380-1210RZ
G = FSMD400-1210RZ
H = FSMD450-1210RZ
I = FSMD650-1210RZ

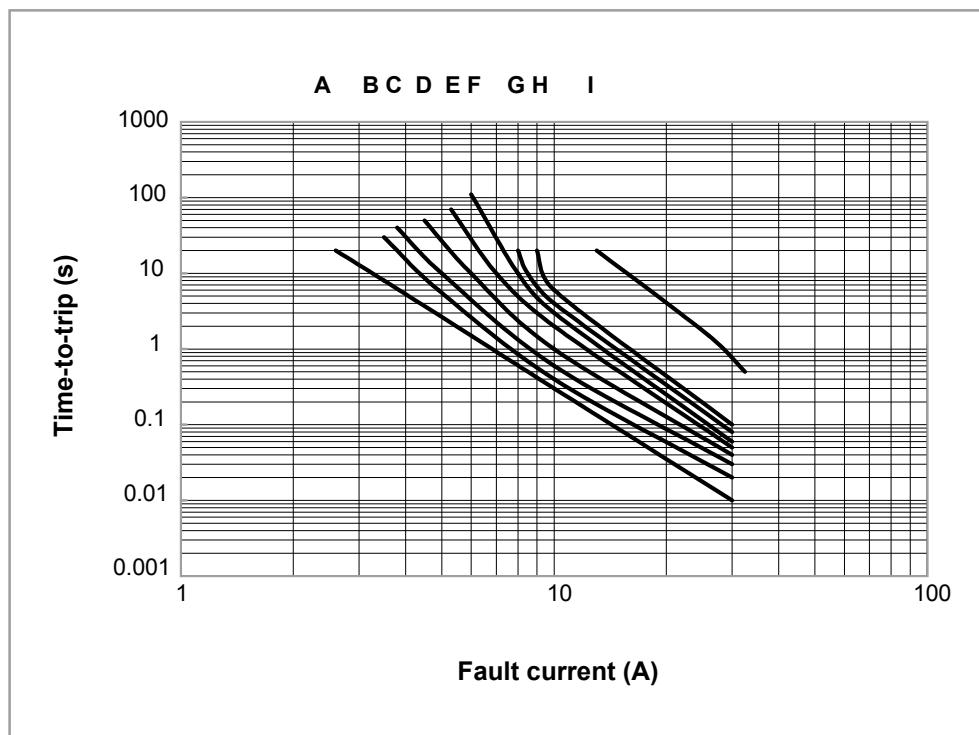

Part Numbering System

F S M D □ □ □ - 1210 RZ

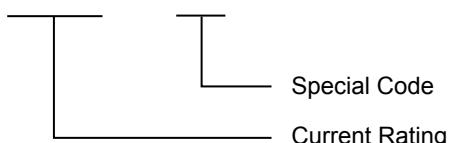

Part Marking System



Example



Part Identification

KZ = FSMD175-1210RZ

MZ = FSMD200-1210RZ

QZ = FSMD260-1210RZ

SZ = FSMD300-1210RZ

VZ = FSMD350-1210RZ

WZ = FSMD380-1210RZ

XZ = FSMD400-1210RZ

YZ = FSMD450-1210RZ

CZ = FSMD650-1210RZ


Standard Package

FSMD175-1210RZ~ FSMD260-1210RZ : 4.0K Reel/Tape
 FSMD300-1210RZ~ FSMD650-1210RZ : 3.0K Reel/Tape

Warning :

- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

Low Rho FSMD1206 Series

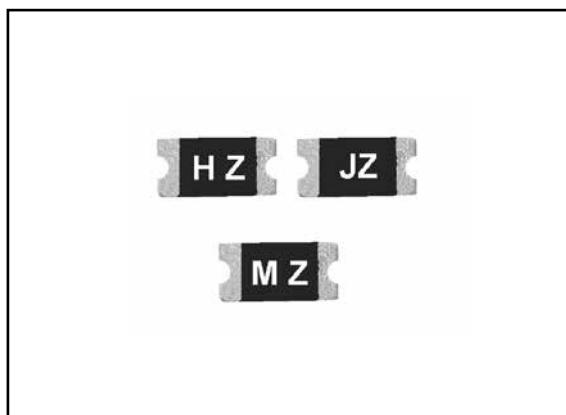

RoHS Compliant & Halogen Free

RoHS

HF

Halogen Free

Application : All high-density boards

Product Features : Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices

Operation Current : 0.5~6.0A

Maximum Voltage : 6V

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

C-UL (E211981)

TÜV (R50090556)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance	
	I _H , A	I _T , A	V _{MAX} , V _{DC}			Current	Time	R _{MIN}	R _{1MAX}
FSMD050-1206RZ	0.50	1.50	6	100	0.8	8.0	0.20	0.025	0.200
FSMD075-1206RZ	0.75	1.80	6	100	0.8	8.0	0.30	0.018	0.180
FSMD110-1206RZ	1.10	2.20	6	100	0.8	8.0	0.30	0.015	0.100
FSMD150-1206RZ	1.50	3.00	6	100	0.8	8.0	0.30	0.010	0.065
FSMD175-1206RZ	1.75	3.50	6	100	0.8	8.0	0.40	0.005	0.030
FSMD200-1206RZ	2.00	4.00	6	100	0.8	8.0	0.50	0.005	0.025
FSMD260-1206RZ	2.60	5.20	6	100	0.8	8.0	4.00	0.003	0.025
FSMD300-1206RZ	3.00	6.00	6	100	0.8	8.0	4.00	0.003	0.020
FSMD350-1206RZ	3.50	7.00	6	100	0.8	8.0	5.00	0.003	0.018
FSMD380-1206RZ	3.80	8.00	6	100	0.8	8.0	5.00	0.002	0.014
FSMD450-1206RZ	4.50	9.00	6	100	0.8	22.5	2.00	0.001	0.014
FSMD500-1206RZ	5.00	10.00	6	100	0.8	25.0	5.00	0.002	0.010
FSMD600-1206RZ	6.00	12.00	6	100	1.0	30.0	2.00	0.001	0.008


Termination pad characteristics

Termination pad materials : Pure Tin

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	92%	84%	77%	69%	61%	50%

Low Rho FSMD1206 Product Dimensions (mm)

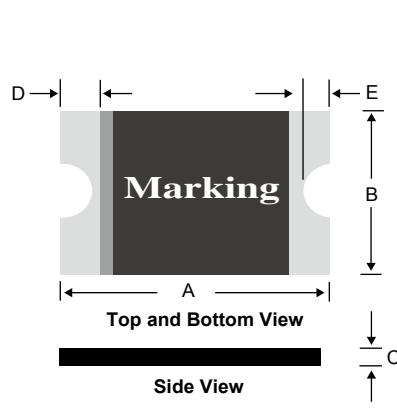


Part Number	A		B		C		D		E	
	Min.	Max.								
FSMD050-1206RZ	3.00	3.50	1.50	1.80	0.30	0.70	0.25	0.75	0.10	0.45
FSMD075-1206RZ	3.00	3.50	1.50	1.80	0.30	0.70	0.25	0.75	0.10	0.45
FSMD110-1206RZ	3.00	3.50	1.50	1.80	0.30	0.70	0.25	0.75	0.10	0.45
FSMD150-1206RZ	3.00	3.50	1.50	1.80	0.30	0.70	0.25	0.75	0.10	0.45
FSMD175-1206RZ	3.00	3.50	1.50	1.80	0.30	0.70	0.25	0.75	0.10	0.45
FSMD200-1206RZ	3.00	3.50	1.50	1.80	0.30	0.70	0.25	0.75	0.10	0.45
FSMD260-1206RZ	3.00	3.50	1.50	1.80	0.30	1.00	0.25	0.75	0.10	0.45
FSMD300-1206RZ	3.00	3.50	1.50	1.80	0.30	1.00	0.25	0.75	0.10	0.45
FSMD350-1206RZ	3.00	3.50	1.50	1.80	0.60	1.00	0.25	0.75	0.10	0.45
FSMD380-1206RZ	3.00	3.50	1.50	1.80	0.60	1.00	0.25	0.75	0.10	0.45
FSMD450-1206RZ	3.00	3.50	1.50	1.80	0.60	1.00	0.25	0.75	0.10	0.45
FSMD500-1206RZ	3.00	3.50	1.50	1.80	0.60	1.00	0.25	0.75	0.10	0.45
FSMD600-1206RZ	3.00	3.50	1.50	1.80	0.60	1.00	0.25	0.75	0.10	0.45

*For Reflow Soldering Profile information, please refer to P.76 “ IV APPENDIX – SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”


Typical Time-To-Trip at 23°C

A = FSMD050-1206RZ
B = FSMD075-1206RZ
C = FSMD110-1206RZ
D = FSMD150-1206RZ
E = FSMD175-1206RZ
F = FSMD200-1206RZ
G = FSMD260-1206RZ
H = FSMD300-1206RZ
I = FSMD350-1206RZ
J = FSMD380-1206RZ
K = FSMD450-1206RZ
L = FSMD500-1206RZ
M = FSMD600-1206RZ

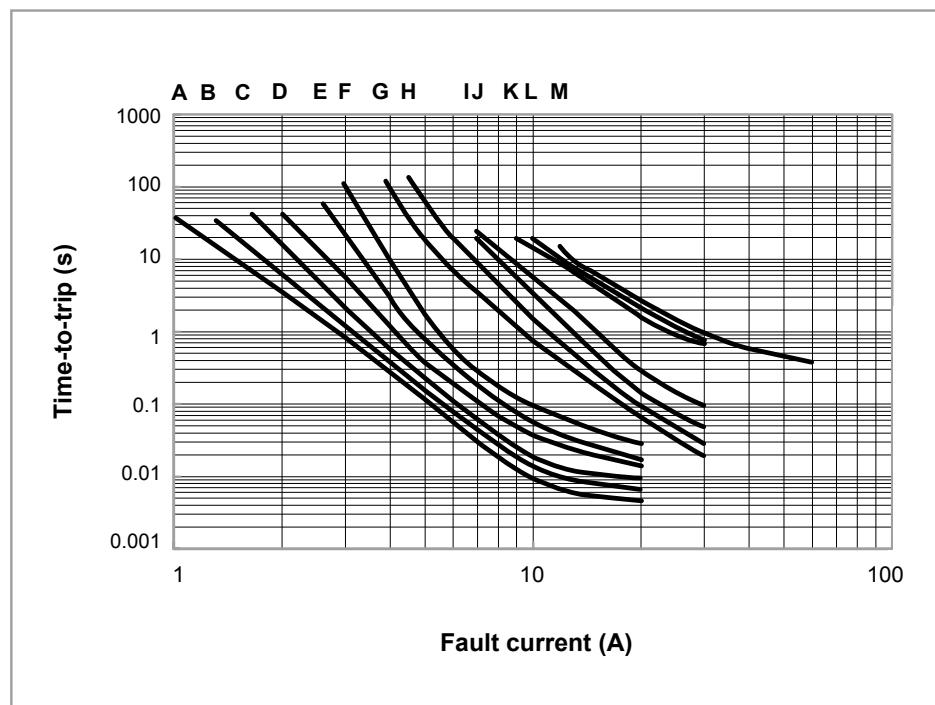


Part Numbering System

F S M D □ □ □ - 1206 RZ

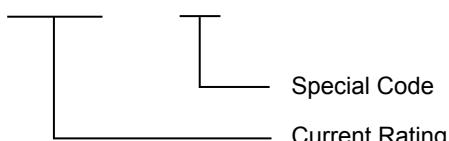

Part Marking System



Part Identification

EZ = FSMD050-1206RZ
FZ = FSMD075-1206RZ
HZ = FSMD110-1206RZ
JZ = FSMD150-1206RZ
KZ = FSMD175-1206RZ
MZ = FSMD200-1206RZ
QZ = FSMD260-1206RZ
SZ = FSMD300-1206RZ
VZ = FSMD350-1206RZ
WZ = FSMD380-1206RZ
YZ = FSMD450-1206RZ
ZZ = FSMD500-1206RZ
BZ = FSMD600-1206RZ

Standard Package

FSMD050-1206RZ~ FSMD200-1206RZ : 4.0K Reel/Tape


FSMD260-1206RZ~ FSMD450-1206RZ : 3.0K Reel/Tape

FSMD500-1206RZ~ FSMD600-1206RZ : 2.0K Reel/Tape

- Warning :**
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 - PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 - Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.



Low Rho FSMD0805 Series

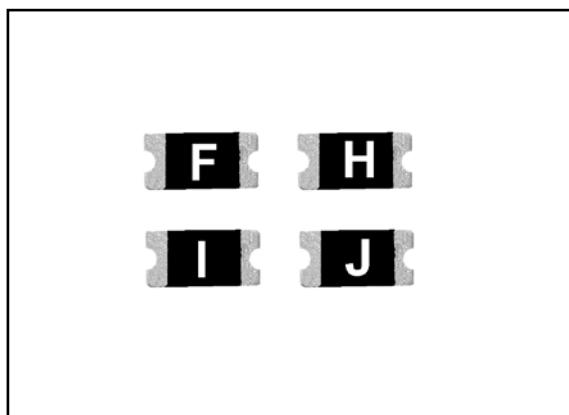

RoHS Compliant & Halogen Free

RoHS

HF

Halogen Free

Application : All high-density boards

Product Features : Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices

Operation Current : 0.75~2.00A

Maximum Voltage : 6V

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

C-UL (E211981)

TÜV (R50090556)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance	
	I _H , A	I _T , A	V _{MAX} , V _{DC}			A	Sec	R _{MIN}	R _{1MAX}
FSMD075-0805RZ	0.75	1.50	6	100	0.6	8.0	0.20	0.040	0.160
FSMD110-0805RZ	1.10	1.80	6	100	0.6	8.0	0.30	0.030	0.130
FSMD125-0805RZ	1.25	2.50	6	100	0.6	8.0	0.30	0.025	0.110
FSMD150-0805RZ	1.50	3.00	6	100	0.6	8.0	0.30	0.015	0.065
FSMD175-0805RZ	1.75	3.50	6	100	0.6	8.0	0.60	0.005	0.055
FSMD200-0805RZ	2.00	4.00	6	100	0.6	8.0	1.00	0.005	0.045


Termination pad characteristics

Termination pad materials : Pure Tin

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	92%	84%	77%	69%	61%	50%

Low Rho FSMD0805 Product Dimensions (mm)

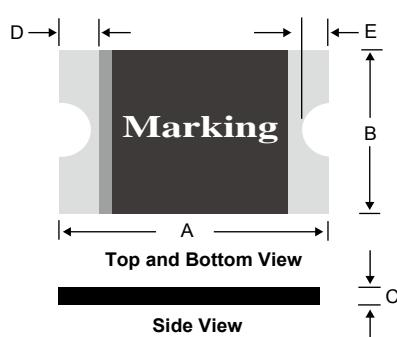


Part Number	A		B		C		D		E	
	Min.	Max.								
FSMD075-0805RZ	2.00	2.20	1.20	1.50	0.30	0.70	0.20	0.60	0.10	0.45
FSMD110-0805RZ	2.00	2.20	1.20	1.50	0.30	0.70	0.20	0.60	0.10	0.45
FSMD125-0805RZ	2.00	2.20	1.20	1.50	0.30	0.70	0.20	0.60	0.10	0.45
FSMD150-0805RZ	2.00	2.20	1.20	1.50	0.30	0.70	0.20	0.60	0.10	0.45
FSMD175-0805RZ	2.00	2.20	1.20	1.50	0.30	0.70	0.20	0.60	0.10	0.45
FSMD200-0805RZ	2.00	2.20	1.20	1.50	0.30	0.70	0.20	0.60	0.10	0.45

*For Reflow Soldering Profile information, please refer to P.76 “ IV APPENDIX – SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”


Typical Time-To-Trip at 23°C

A = FSMD075-0805RZ
B = FSMD110-0805RZ
C = FSMD125-0805RZ
D = FSMD150-0805RZ
E = FSMD175-0805RZ
F = FSMD200-0805RZ

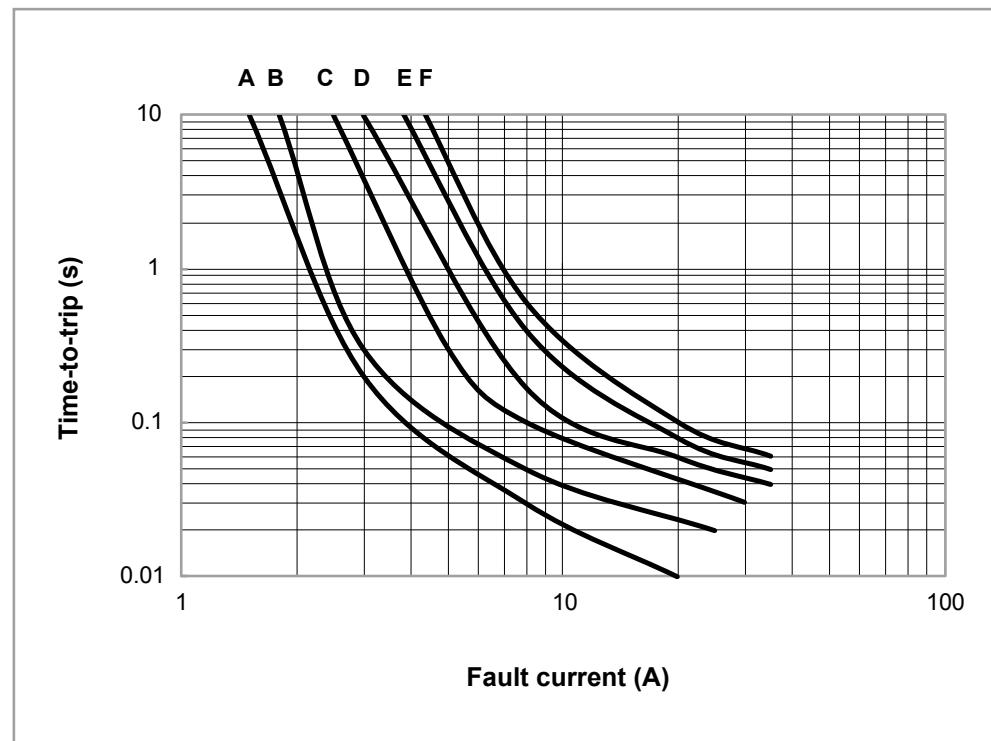

Part Numbering System

F S M D □ □ □ - 0805 RZ

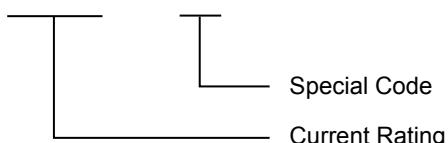

Part Marking System



Part Identification

F = FSMD075-0805RZ
H = FSMD110-0805RZ
I = FSMD125-0805RZ
J = FSMD150-0805RZ
K = FSMD175-0805RZ
M = FSMD200-0805RZ


Standard Package

FSMD075-0805RZ~ FSMD200-0805RZ : 4.0K Reel/Tape

Warning :

- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

Low Rho FSMD0603 Series

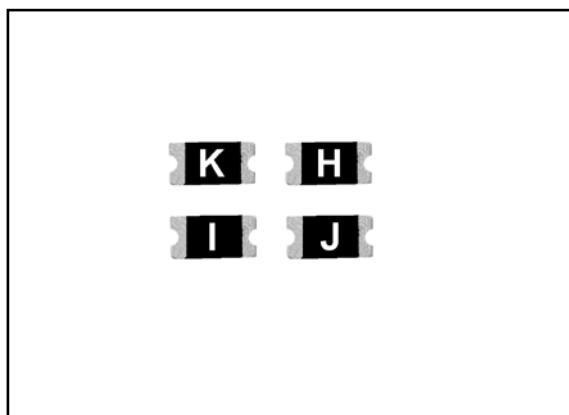

RoHS Compliant & Halogen Free

RoHS

HF

Halogen Free

Application : All high-density boards

Product Features : Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices

Operation Current : 0.25~1.00A

Maximum Voltage : 6V~9 V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance	
	I _H , A	I _T , A	V _{MAX} , V _{DC}			A	Sec	R _{MIN}	R _{1MAX}
FSMD025-0603RZ	0.25	0.55	9	100	0.5	8.0	0.08	0.500	3.000
FSMD035-0603RZ	0.35	0.75	6	100	0.5	8.0	0.10	0.200	1.000
FSMD050-0603RZ	0.50	1.00	6	100	0.6	8.0	0.10	0.070	0.350
FSMD075-0603RZ	0.75	1.50	6	100	0.6	8.0	0.20	0.050	0.250
FSMD100-0603RZ	1.00	1.80	6	100	0.6	8.0	0.30	0.040	0.120


Termination pad characteristics

Termination pad materials : Pure Tin

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	92%	84%	77%	69%	61%	50%

Low Rho FSMD0603 Product Dimensions (mm)

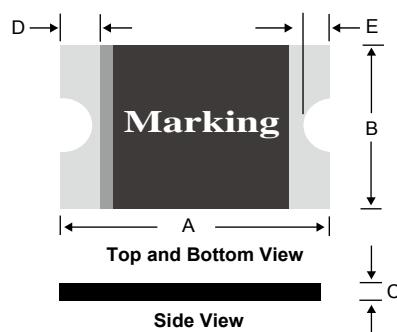


Part Number	A		B		C		D		E	
	Min.	Max.								
FSMD025-0603RZ	1.40	1.80	0.45	1.00	0.30	0.70	0.10	0.50	0.08	0.40
FSMD035-0603RZ	1.40	1.80	0.45	1.00	0.30	0.70	0.10	0.50	0.08	0.40
FSMD050-0603RZ	1.40	1.80	0.45	1.00	0.30	0.70	0.10	0.50	0.08	0.40
FSMD075-0603RZ	1.40	1.80	0.45	1.00	0.30	0.70	0.10	0.50	0.08	0.40
FSMD100-0603RZ	1.40	1.80	0.45	1.00	0.30	0.70	0.10	0.50	0.08	0.40

*For Reflow Soldering Profile information, please refer to P.76 “ IV APPENDIX – SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”


Typical Time-To-Trip at 23°C

A = FSMD025-0603RZ
B = FSMD035-0603RZ
C = FSMD050-0603RZ
D = FSMD075-0603RZ
E = FSMD100-0603RZ


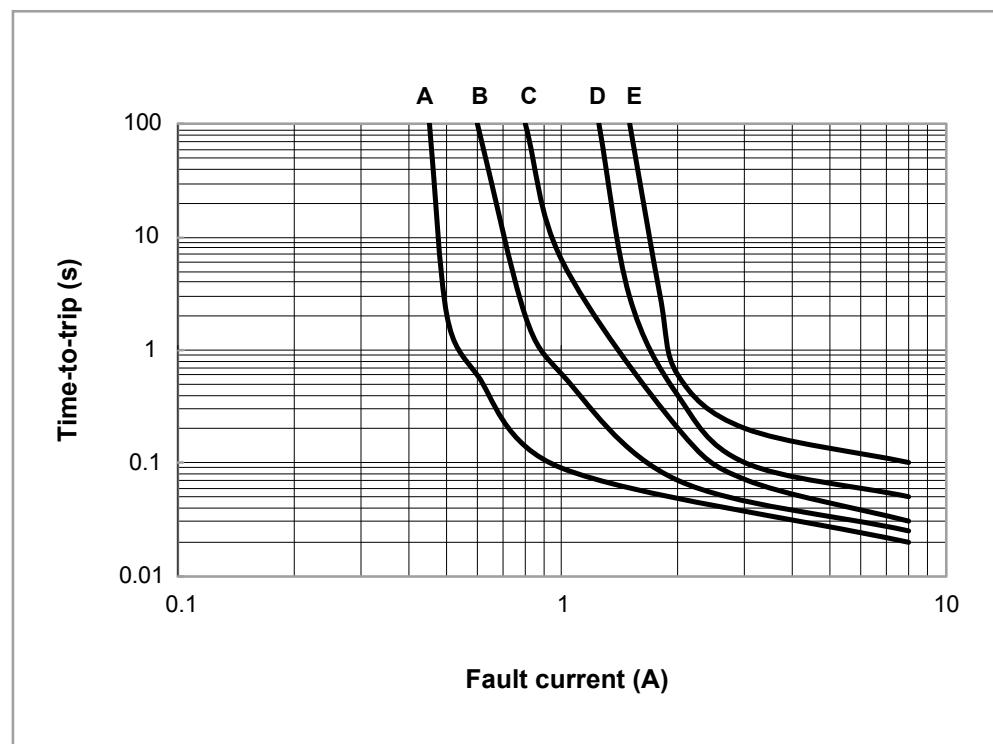


Part Numbering System

FSMD □ □ □ - 0603 RZ

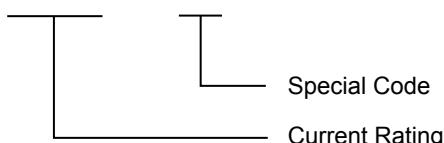

Part Marking System



Part Identification

H = FSMD025-0603RZ
I = FSMD035-0603RZ
J = FSMD050-0603RZ
K = FSMD075-0603RZ
L = FSMD100-0603RZ


Standard Package

FSMD025-0603RZ~ FSMD100-0603RZ : 4.0K Reel/Tape

Warning :

- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

Low Rho FSMD0402 Series

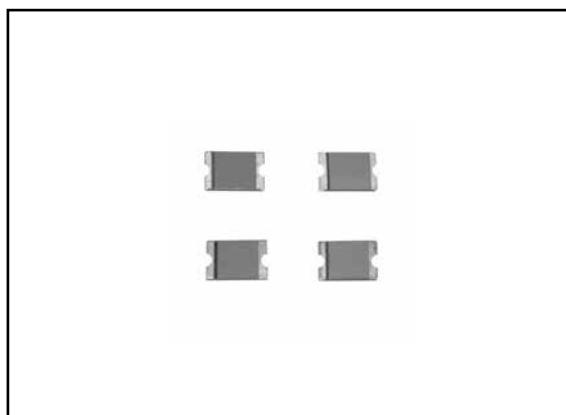

RoHS Compliant & Halogen Free

RoHS

HF

Halogen Free

Application : All high-density boards

Product Features : Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices

Operation Current : 0.10~0.50A

Maximum Voltage : 6V_{DC}

Temperature Range : -40°C to 85°C

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance	
	I _H , A	I _T , A	V _{MAX} , V _{DC}			A	Sec	R _{MIN}	R _{1MAX}
FSMD010-0402RZ	0.10	0.30	6	100	0.5	0.5	1.0	0.150	2.000
FSMD020-0402RZ	0.20	0.50	6	100	0.5	1.0	1.0	0.100	1.250
FSMD035-0402RZ	0.35	0.70	6	100	0.5	8.0	0.1	0.050	0.700
FSMD050-0402RZ	0.50	1.00	6	100	0.5	8.0	0.1	0.040	0.400


Termination pad characteristics

Termination pad materials : Pure Tin

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	145%	130%	115%	100%	92%	84%	77%	69%	61%	50%

Low Rho FSMD0402 Product Dimensions (mm)

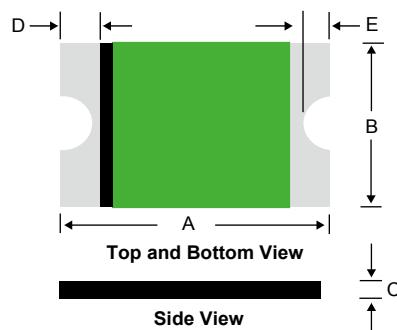


Part Number	A		B		C		D		E	
	Min.	Max.								
FSMD010-0402RZ	0.85	1.15	0.35	0.65	0.30	0.60	0.10	0.45	0.05	0.40
FSMD020-0402RZ	0.85	1.15	0.35	0.65	0.30	0.60	0.10	0.45	0.05	0.40
FSMD035-0402RZ	0.85	1.15	0.35	0.65	0.30	0.60	0.10	0.45	0.05	0.40
FSMD050-0402RZ	0.85	1.15	0.35	0.65	0.30	0.60	0.10	0.45	0.05	0.40

*For Reflow Soldering Profile information, please refer to P.76 “ IV APPENDIX – SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”


Typical Time-To-Trip at 23°C

A = FSMD010-0402RZ
B = FSMD020-0402RZ
C = FSMD035-0402RZ
D = FSMD050-0402RZ

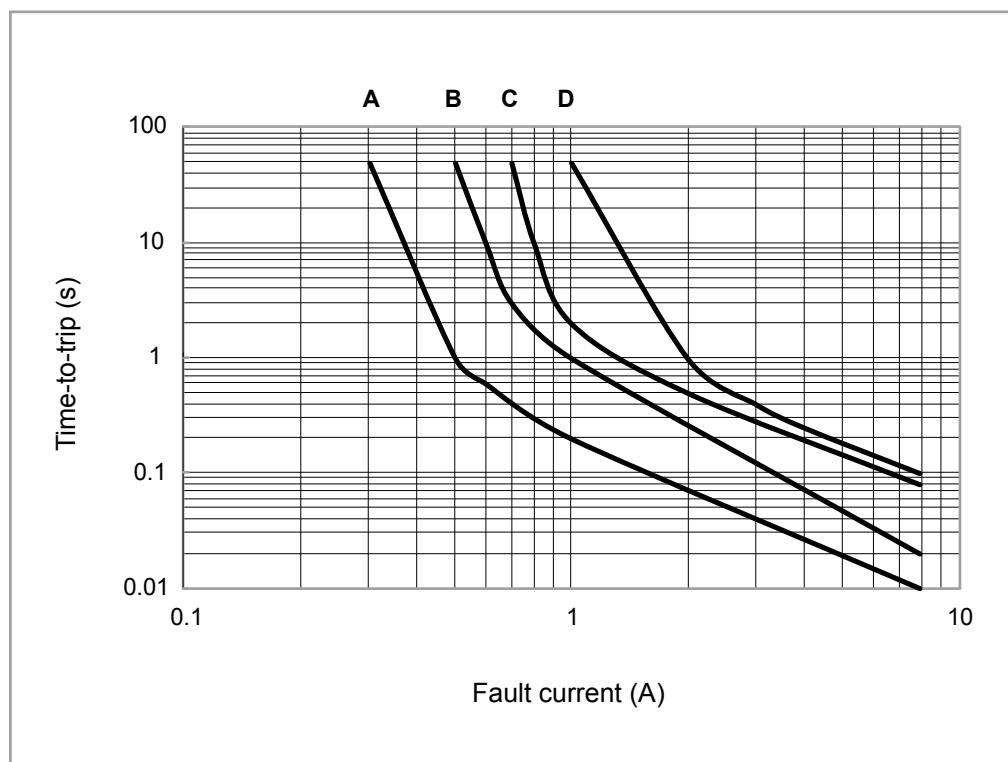

Part Numbering System

F S M D □ □ □ - 0402 RZ

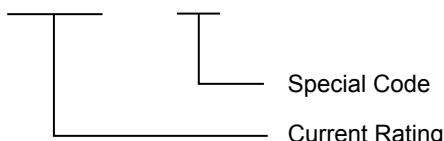

Standard Package

FSMD010-0402RZ~ FSMD050-0402RZ : 10K Reel/Tape

- Warning :**
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 - PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 - Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.

Low Rho STRAP FSL Series



RoHS Compliant & Halogen Free

RoHS

HF

Halogen Free

Application : Rechargeable battery packs protection, especially for Smart Phone and Tablet PC.

Product Features : Low resistance, Solid state

Operation Current : 1.4~7.0A

Maximum Voltage : 6V_{DC}

Temperature Range : -40°C to 85°C

Agency Recognition : UL (E211981)

C-UL (E211981)

TÜV (R50004084)

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Rated Voltage	Max. Current	Typ. Power	Max. Time to trip		Resistance		
	I _H , A	I _T , A	V _{MAX} , V _{DC}	I _{MAX} , A	P _d , W	A	Sec	R _{MIN}	R _{MAX}	R _{1MAX}
FSL140F-N	1.4	3.6	6	50	1.0	7.0	3.0	0.0100	0.0200	0.0350
FSL190F-N	1.9	4.9	6	50	1.0	9.5	3.0	0.0060	0.0140	0.0240
FSL250F-N	2.5	8.0	6	50	1.0	12.5	3.0	0.0060	0.0120	0.0200
FSL270F-N	2.7	8.1	6	50	1.0	13.5	2.0	0.0060	0.0120	0.0180
FSL310F-N	3.1	8.8	6	50	1.0	15.5	3.0	0.0040	0.0100	0.0160
FSL370F-N	3.7	9.0	6	50	1.0	18.5	5.0	0.0030	0.0080	0.0140
FSL450LF-N	4.5	9.5	6	50	1.0	22.5	3.0	0.0025	0.0055	0.0100
FSL500F-N	5.0	10.0	6	50	1.0	25.0	3.0	0.0015	0.0050	0.0090
FSL700F-N	7.0	14.0	6	50	1.0	25.0	3.0	0.0010	0.0045	0.0080

Physical specifications :

Lead material : 0.1 mm nominal thickness, quarter-hard nickel.


Insulating material : Epoxy.

*Remark : Polyester Tape is also available for this series.

Thermal Derating for PPTC Device at Various Ambient Temperatures

TEMPERATURE	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C
DERATING %	184%	158%	131%	100%	93%	79%	67%	54%	40%	20%


Low Rho Product Dimensions (mm)

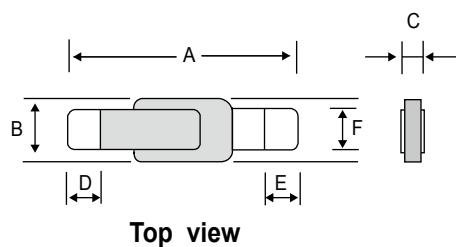

Part Number	A		B		C		D		E		F	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
FSL140F-N	9.20	10.80	3.15	3.45	0.55	1.10	2.15	3.25	2.15	3.25	2.20	2.40
FSL190F-N	9.20	10.80	3.15	3.45	0.55	1.10	2.15	3.25	2.15	3.25	2.20	2.40
FSL250F-N	9.20	10.80	3.15	3.45	0.55	1.10	2.15	3.25	2.15	3.25	2.20	2.40
FSL270F-N	9.20	10.80	3.15	3.45	0.55	1.10	2.15	3.25	2.15	3.25	2.20	2.40
FSL310F-N	9.20	10.80	3.15	3.45	0.55	1.10	2.15	3.25	2.15	3.25	2.20	2.40
FSL370F-N	9.20	10.80	3.15	3.45	0.55	1.10	2.15	3.25	2.15	3.25	2.20	2.40
FSL450LF-N	20.50	21.50	3.50	3.90	0.55	1.10	7.00	8.00	7.00	8.00	2.40	2.60
FSL500F-N	20.50	21.50	3.50	3.90	0.55	1.10	7.00	8.00	7.00	8.00	2.40	2.60
FSL700F-N	21.00	23.00	3.50	3.90	0.55	1.10	4.60	6.60	4.60	6.60	2.90	3.10


Typical Time-To-Trip at 23°C

A = FSL140F-N
B = FSL190F-N
C = FSL250F-N /
 FSL270F-N
D = FSL310F-N
E = FSL370F-N
F = FSL450LF-N
G = FSL500F-N
H = FSL700F-N

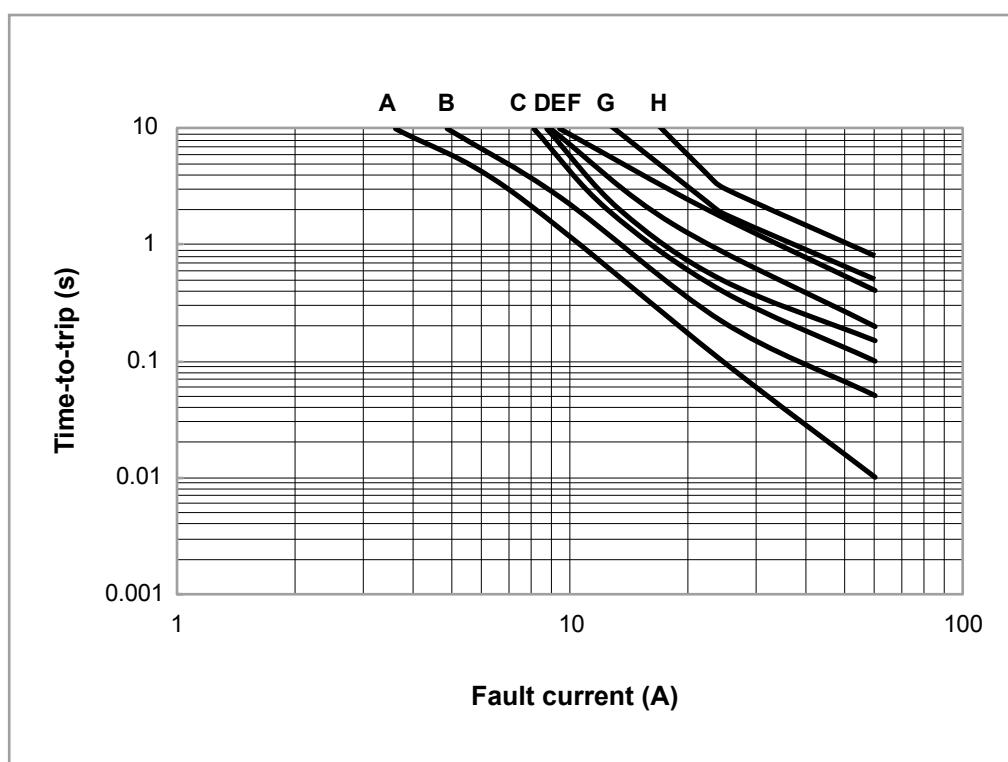

Part Numbering System

F S L □ □ □ (□ F) - N

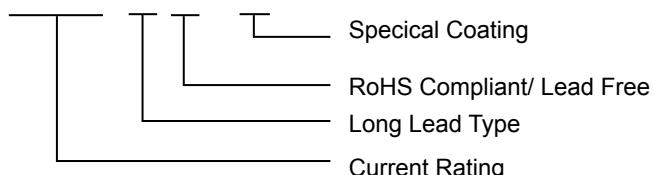

Standard Package

FSL140F-N~FSL700F-N : 500 Pcs/Bag

- Warning :**
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
 - PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
 - Avoid contact of PPTC device with chemical solvent. Prolonged contact will damage the device performance.



Fuzetec	Tyco (Raychem)	Bourns	Littelfuse	Polytronics
FRX 005-60F	RXEF 005	MF-R 005	-- --	-- --
FRX 010-60F	RXEF 010	MF-R 010	60R 010	RLD60P 010XF
FRX 017-60F	RXEF 017	MF-R 017	60R 017	RLD60P 017XF
FRX 020-60F	-- --	MF-R 020	60R 020	RLD60P 020XF
FRX 025-60F	-- --	MF-R 025	60R 025	RLD60P 025XF
FRX 030-60F	-- --	MF-R 030	60R 030	RLD60P 030XF
FRX 040-60F	-- --	MF-R 040	60R 040	RLD60P 040XF
FRX 050-60F	-- --	MF-R 050	60R 050	RLD60P 050XF
FRX 065-60F	-- --	MF-R 065	60R 065	RLD60P 065XF
FRX 075-60F	-- --	MF-R 075	60R 075	RLD60P 075XF
FRX 090-60F	-- --	MF-R 090	60R 090	RLD60P 090XF
FRX 110-60F	-- --	MF-RX 110	60R 110	RLD60P 110XF
FRX 135-60F	-- --	MF-RX 135	60R 135	RLD60P 135XF
FRX 160-60F	-- --	MF-RX 160	60R 160	RLD60P 160XF
FRX 185-60F	-- --	MF-RX 185	60R 185	RLD60P 185XF
FRX 250-60F	-- --	MF-RX 250	60R 250	RLD60P 250XF
FRX 300-60F	-- --	MF-RX 300	60R 300	RLD60P 300XF
FRX 375-60F	-- --	MF-RX 375	60R 375	RLD60P 375XF
FRX 010-90F	-- --	-- --	-- --	-- --
FRX 015-90F	-- --	-- --	-- --	-- --
FRX 017-90F	-- --	-- --	-- --	-- --
FRX 020-90F	RXEF 020	MF-RX 020/72	72R 020X	RLD72P 020XF
FRX 025-90F	RXEF 025	MF-RX 025/72	72R 025X	RLD72P 025XF
FRX 030-90F	RXEF 030	MF-RX 030/72	72R 030X	RLD72P 030XF
FRX 035-90F	-- --	-- --	-- --	-- --
FRX 040-90F	RXEF 040	MF-RX 040/72	72R 040X	RLD72P 040XF
FRX 050-90F	RXEF 050	MF-RX 050/72	72R 050X	RLD72P 050XF
FRX 055-90F	-- --	-- --	-- --	-- --
FRX 065-90F	RXEF 065	MF-RX 065/72	72R 065X	RLD72P 065XF
FRX 075-90F	RXEF 075	MF-RX 075/72	72R 075X	RLD72P 075XF
FRX 090-90F	RXEF 090	MF-RX 090/72	72R 090X	RLD72P 090XF
FRX 110-90F	RXEF 110	MF-RX 110/72	72R 110X	RLD72P 110XF
FRX 135-90F	RXEF 135	MF-RX 135/72	72R 135X	RLD72P 135XF
FRX 160-90F	RXEF 160	MF-RX 160/72	72R 160X	RLD72P 160XF
FRX 185-90F	RXEF 185	MF-RX 185/72	72R 185X	RLD72P 185XF
FRX 250-90F	RXEF 250	MF-RX 250/72	72R 250X	RLD72P 250XF
FRX 300-90F	RXEF 300	MF-RX 300/72	72R 300X	RLD72P 300XF
FRX 375-90F	RXEF 375	MF-RX 375/72	72R 375X	RLD72P 375XF
FUSB 075F	RUSBF 075	-- --	06R 075B	RLD06P 075BF
FUSB 090F	RUSBF 090	-- --	16R 090B	RLD16P 090BF
FUSB 110F	RUSBF 110	-- --	16R 110B	RLD16P 110BF
FUSB 120F	RUSBF 120	-- --	06R 120B	RLD06P 120BF
FUSB 135F	RUSBF 135	-- --	16R 135B	RLD16P 135BF
FUSB 155F	RUSBF 155	-- --	06R 155B	RLD06P 155BF
FUSB 160F	RUSBF 160	-- --	16R 160B	RLD16P 160BF
FUSB 185F	RUSBF 185	-- --	16R 185B	RLD16P 185BF
FUSB 250F	RUSBF 250	-- --	16R 250B	RLD16P 250BF

IV - APPENDIX- CROSS REFERENCE



FUZETEC

Fuzetec		Tyco (Raychem)		Bourns		Littelfuse		Polytronics	
FRU	090-30F	RUEF	090	MF-R	090-0-9	30R	090	RLD30P	090UF
FRU	110-30F	RUEF	110	MF-R	110	30R	110	RLD30P	110UF
FRU	135-30F	RUEF	135	MF-R	135	30R	135	RLD30P	135UF
FRU	160-30F	RUEF	160	MF-R	160	30R	160	RLD30P	160UF
FRU	185-30F	RUEF	185	MF-R	185	30R	185	RLD30P	185UF
FRU	250-30F	RUEF	250	MF-R	250	30R	250	RLD30P	250UF
FRU	300-30F	RUEF	300	MF-R	300	30R	300	RLD30P	300UF
FRU	400-30F	RUEF	400	MF-R	400	30R	400	RLD30P	400UF
FRU	500-30F	RUEF	500	MF-R	500	30R	500	RLD30P	500UF
FRU	600-30F	RUEF	600	MF-R	600	30R	600	RLD30P	600UF
FRU	700-30F	RUEF	700	MF-R	700	30R	700	RLD30P	700UF
FRU	800-30F	RUEF	800	MF-R	800	30R	800	RLD30P	800UF
FRU	900-30F	RUEF	900	MF-R	900	30R	900	RLD30P	900UF
FRT	050-33F	--	--	--	--	--	--	--	--
FRT	075-33F	--	--	--	--	--	--	--	--
FRT	090-33F	--	--	--	--	--	--	--	--
FRT	120-33F	RTEF	120	--	--	--	--	--	--
FRT	135-33F	RTEF	135	--	--	--	--	--	--
FRT	160-33F	--	--	--	--	--	--	--	--
FRT	190-33F	RTEF	190	--	--	--	--	--	--
FRT	220-33F	--	--	--	--	--	--	--	--
FRT	250-33F	--	--	--	--	--	--	--	--
FRG	250-16F	RGEF	250	--	--	16R	250G	RLD16P	250GF
FRG	300-16F	RGEF	300	MF-RG	300	16R	300G	RLD16P	300GF
FRG	400-16F	RGEF	400	--	--	16R	400G	RLD16P	400GF
FRG	500-16F	RGEF	500	MF-RG	500	16R	500G	RLD16P	500GF
FRG	600-16F	RGEF	600	--	--	16R	600G	RLD16P	600GF
FRG	700-16F	RGEF	700	--	--	16R	700G	RLD16P	700GF
FRG	800-16F	RGEF	800	--	--	16R	800G	RLD16P	800GF
FRG	900-16F	RGEF	900	--	--	16R	900G	RLD16P	900GF
FRG	1000-16F	RGEF	1000	--	--	16R	1000G	RLD16P	1000GF
FRG	1100-16F	RGEF	1100	--	--	16R	1100G	RLD16P	1100GF
FRG	1200-16F	RGEF	1200	--	--	16R	1200G	RLD16P	1200GF
FRG	1400-16F	RGEF	1400	--	--	16R	1400G	RLD16P	1400GF
FHT	050-30F	RHEF	050	--	--	--	--	--	--
FHT	070-30F	RHEF	070	MF-RHT	070	--	--	--	--
FHT	100-30F	RHEF	100	--	--	--	--	--	--
FHT	200-16F	RHEF	200	MF-RHT	200	--	--	--	--
FHT	300-16F	RHEF	300	--	--	--	--	--	--
FHT	400-16F	RHEF	400	--	--	--	--	--	--
FHT	450-16F	RHEF	450	MF-RHT	450	--	--	--	--
FHT	550-16F	RHEF	550	--	--	--	--	--	--
FHT	600-16F	RHEF	600	--	--	--	--	--	--
FHT	650-16F	RHEF	650	MF-RHT	650	--	--	--	--
FHT	700-16F	RHEF	700	--	--	--	--	--	--
FHT	750-16F	RHEF	750	MF-RHT	750	--	--	--	--
FHT	800-16F	RHEF	800	--	--	--	--	--	--
FHT	900-16F	RHEF	900	--	--	--	--	--	--
FHT	1000-16F	RHEF	1000	--	--	--	--	--	--
FHT	1100-16F	RHEF	1100	--	--	--	--	--	--
FHT	1300-16F	RHEF	1300	MF-RHT	1300	--	--	--	--
FHT	1400-16F	RHEF	1400	--	--	--	--	--	--
FHT	1500-16F	RHEF	1500	--	--	--	--	--	--

Fuzetec	Tyco (Raychem)	Bourns	Littelfuse	Polytronics
FRH 080-250VF	TRF 250-080	-- --	250R 080	HVR250P 080CF
FRH 110-250VF	-- --	-- --	-- --	-- --
FRH 120-250VF	TRF 250-120	MF-RX 012/250	250R 120	HVR250P 120CF
FRH 145-250VF	TRF 250-145	MF-RX 014/250	250R 145	HVR250P 145CF
FRH 180-250XF	TRF 250-184	-- --	-- --	-- --
FRH 150-600MF	TRF 600-150	-- --	600R 150	HVR600P 150CF
FRH 160-600MF	-- --	-- --	-- --	-- --
FRH 160-600VF	TRF 600-160	MF-R 016/600	600R 160	HVR600P 160CF
FRH 200-600VF	-- --	-- --	-- --	-- --
FRH 250-600VF	TRF 600-250	-- --	-- --	-- --
FRH 400-600F	TRF 600-400	-- --	-- --	-- --
FRV 005-240F	LVR 005S	MF-RM 005/240	-- --	-- --
FRV 008-240F	LVR 008S	MF-RM 008/240	-- --	-- --
FRV 012-240F	LVR 012S	MF-RM 012/240	-- --	-- --
FRV 016-240F	LVR 016S	MF-RM 016/240	-- --	-- --
FRV 025-240F	LVR 025S	MF-RM 025/240	-- --	-- --
FRV 033-240F	LVR 033S	MF-RM 033/240	-- --	-- --
FRV 040-240F	LVR 040S	MF-RM 040/240	-- --	-- --
FRV 055-240F	LVR 055S	MF-RM 055/240	-- --	-- --
FRV 075-240F	LVR 075S	-- --	-- --	-- --
FRV 100-240F	LVR 100S	-- --	-- --	-- --
FRV 125-240F	LVR 125S	-- --	-- --	-- --
FRV 150-240F	LVR 150S	-- --	-- --	-- --
FRV 200-240F	LVR 200S	-- --	-- --	-- --
FRVL 010-120F	-- --	-- --	-- --	-- --
FRVL 017-120F	-- --	-- --	-- --	-- --
FRVL 020-120F	-- --	-- --	-- --	-- --
FRVL 025-120F	-- --	-- --	-- --	-- --
FRVL 030-120F	-- --	-- --	-- --	-- --
FRVL 040-120F	-- --	-- --	-- --	-- --
FRVL 050-120F	-- --	-- --	-- --	-- --
FRVL 065-120F	-- --	-- --	-- --	-- --
FRVL 070-120F	-- --	-- --	-- --	-- --
FRVL 075-120F	LVRL 075S	-- --	-- --	-- --
FRVL 090-120F	-- --	-- --	-- --	-- --
FRVL 100-120F	LVRL 100S	-- --	-- --	-- --
FRVL 110-120F	-- --	-- --	-- --	-- --
FRVL 125-120F	LVRL 125S	-- --	-- --	-- --
FRVL 130-120F	-- --	-- --	-- --	-- --
FRVL 135-120F	LVRL 135S	-- --	-- --	-- --
FRVL 160-120F	-- --	-- --	-- --	-- --
FRVL 185-120F	-- --	-- --	-- --	-- --
FRVL 200-120F	LVRL 200S	-- --	-- --	-- --
FRVL 250-120F	-- --	-- --	-- --	-- --
FRVL 300-120F	-- --	-- --	-- --	-- --
FRVL 375-120F	-- --	-- --	-- --	-- --
FSR 120F	SRP 120F	MF-S 120	15ST 120	STD 120F
FSR 175F	SRP 175F	MF-S 175	15ST 175	STD 175F
FSR 200F	SRP 200F	MF-S 200	30ST 200	STD 200F
FSR 350F	SRP 350F	MF-S 350	30ST 350	STD 350F
FSR 420F	SRP 420F	MF-S 420	30ST 420	STD 420F
FLR 190F	LR4 190F	MF-LR 190	15LR 190	LRD 190F
FLR 260F	LR4 260F	MF-LR 260	15LR 260	LRD 260F
FLR 380F	LR4 380F	MF-LR 380	15LR 380	LRD 380F
FLR 450F	LR4 450F	MF-LR 450	20LR 450	LRD 450F
FLR 550F	LR4 550F	MF-LR 550	20LR 550	LRD 550F
FLR 600F	LR4 600F	MF-LR 600	20LR 600	LRD 600F
FLR 730F	LR4 730F	MF-LR 730	20LR 730	LRD 730F
FVT 110F	VTP 110F	-- --	-- --	-- --
FVT 170F	VTP 170F	MF-VS 170	16VT 170	VTD 170F
FVT 175F	VTP 175F	-- --	16VT 175	VTD 175F
FVT 200F	-- --	-- --	16VT 200	VTD 200F
FVT 210GF	VTP 210GF	MF-VS 210	16VT 210	VTD 210F
FVT 240F	-- --	-- --	16VT 240	VTD 240F

Fuzetec	Tyco (Raychem)	Bourns	Littelfuse	Polytronics
FVL 170F	VLR 170F	MF-SVS 170	12VL 170	VLD 170F
FVL 175F	VLR 175F	MF-SVS 175	12VL 175	VLD 175F
FVL 230F	VLR 230F	MF-SVS 230	12VL 230	VLD 230F
FSL 140F-N	-- --	-- --	-- --	SLD 140GF
FSL 190F-N	MXP 190BB	MF-LL 190	06SL 190G	SLD 190GF
FSL 250F-N	-- --	-- --	-- --	SLD 250F
FSL 270F-N	-- --	-- --	-- --	SLD 270UF
FSL 310F-N	-- --	-- --	-- --	SLD 310F
FSL 370F-N	MXP 370	-- --	06SL 370G	SLD 370GF-D
FSL 450LF-N	-- --	-- --	-- --	SLD 450LF
FSL 500F-N	-- --	-- --	-- --	-- --
FSL 700F-N	-- --	-- --	-- --	-- --
FSMD* 030-2920-R	SMD 030F	MF-SM 030	2920L 030	SMD2920P 030TF
FSMD* 050-2920-R	SMD 050F	MF-SM 050	2920L 050	SMD2920P 050TF
FSMD* 075-2920-R	SMD 075F	MF-SM 075	2920L 075	SMD2920P 075TF
FSMD* 075-60-2920-R	SMD 075F/60	MF-SM 075/60	2920L 075/60	SMD2920P 075TF/60
FSMD* 100-2920-R	SMD 100F	MF-SM 100/33	2920L 100/33	SMD2920P 100TF
FSMD 100-60-2920R	-- --	-- --	-- --	-- --
FSMD* 125-2920-R	SMD 125F	MF-SM 125	2920L 125	SMD2920P 125TF
FSMD** 150-2920-R	SMD 150F	MF-SM 150/33	2920L 150/33	SMD2920P 150TF
FSMD** 185-2920-R	SMD 185F	MF-SM 185/33	2920L 185/33	SMD2920P 185TF
FSMD** 200-2920-R	SMD 200F	MF-SM 200	2920L 200	-- --
FSMD** 200-24-2920-R	-- --	-- --	2920L 200/24	SMD2920P 200TF/24
FSMD** 250-2920-R	SMD 250F	MF-SM 250	2920L 250	SMD2920P 250TF
FSMD** 260-2920-R	SMD 260F	MF-SM 260	2920L 260	SMD2920P 260TF
FSMD* 260-24-2920R	-- --	-- --	-- --	SMD2920P 260TF/24
FSMD** 300-2920-R	SMD 300F	MF-SM 300	2920L 300	SMD2920P 300TF
FSMD** 300-15-2920R	SMD 300F/15	-- --	2920L 300/15	SMD2920P 300TF/15
FSMD** 300-24-2920R	SMDC 300F/24	MF-LSMF 300/24X	-- --	-- --
FSMD 010-R	miniSMDC 010F	MF-MSMF 010	1812L 010	SMD1812P 010TF
FSMD 014-R	miniSMDC 014F	MF-MSMF 014	1812L 014	SMD1812P 014TF
FSMD 020-R	miniSMDC 020F	MF-MSMF 020	1812L 020	SMD1812P 020TF
FSMD 020-60-R	-- --	MF-MSMF 020/60	-- --	SMD1812P 020TF-J
FSMD 030-R	miniSMDC 030F	MF-MSMF 030	-- --	-- --
FSMD 035-R	-- --	-- --	-- --	SMD1812P 035TF
FSMD 035-30-R	-- --	-- --	1812L 035/30DR	SMD1812P 035TF/30
FSMD 050-R	miniSMDC 050F	MF-MSMF 050	1812L 050	SMD1812P 050TF
FSMD 050-30-R	-- --	-- --	1812L 050/30	SMD1812P 050TF/30
FSMD 075-R	miniSMDC 075F	MF-MSMF 075	1812L 075	SMD1812P 075TF
FSMD 075-24R	miniSMDC 075F/24	MF-MSMF 075/24	1812L 075/24	SMD1812P 075TF/24
FSMD 075-33R	-- --	-- --	1812L 075/33	SMD1812P 075TF/33
FSMD 110-R	miniSMDC 110F	MF-MSMF 110	1812L 110	SMD1812P 110TF
FSMD 110-16-R	miniSMDC 110F/16	MF-MSMF 110/16	1812L 110/16	SMD1812P 110TF/16
FSMD 110-24R	miniSMDC 110F/24	MF-MSMF 110/24X	1812L 110/24	SMD1812P 110TF/24
FSMD 110-33R	-- --	-- --	1812L 110/33	SMD1812P 110TF/33
FSMD 125-R	miniSMDC 125F	MF-MSMF 125	1812L 125	SMD1812P 125TF/6
FSMD 150-R	miniSMDC 150F	MF-MSMF 150	1812L 150	SMD1812P 150TF/8
FSMD 150-12R	miniSMDC 150F/12	-- --	1812L 150/12	SMD1812P 150TF/12
FSMD 150-24R	miniSMDC 150F/24	MF-MSMF 150/24	1812L 150/24	SMD1812P 150TF/24
FSMD 160-R	miniSMDC 160F	MF-MSMF 160	1812L 160	SMD1812P 160TF/8
FSMD 160-12R	-- --	-- --	1812L 160/12	SMD1812P 160TF/12
FSMD 160-16R	-- --	-- --	-- --	SMD1812P 160TF/16
FSMD 200R	miniSMDC 200F	MF-MSMF 200	1812L 200	SMD1812P 200TFT
FSMD 200-16R	-- --	-- --	-- --	SMD1812P 200TF/16
FSMD 260R	miniSMDC 260F	MF-MSMF 260	1812L 260	SMD1812P 260TFT
FSMD 260-13R	miniSMDC 260F/13.2	-- --	1812L 260/12	SMD1812P 260TF/12
FSMD 260-16R	miniSMDC 260F/16	-- --	-- --	SMD1812P 260TF/16
FSMD 300R	miniSMDC 300F	-- --	1812L 300	SMD1812P 300TFT

* Dimensional equivalent. Functional identical. ** Dimensional smaller. Functional identical.

Fuzetec	Tyco (Raychem)	Bourns	Littelfuse	Polytronics
FSMD 005-1210-R	microSMD 005F	MF-USMF 005	1210L 005	SMD1210P 005TF
FSMD 010-1210-R	microSMD 010F	MF-USMF 010	1210L 010	SMD1210P 010TF
FSMD 020-1210-R	-- --	MF-USMF 020	1210L 020	SMD1210P 020TF
FSMD 035-1210-R	microSMD 035F	MF-USMF 035	1210L 035	SMD1210P 035TF
FSMD 050-1210-R	microSMD 050F	MF-USMF 050	1210L 050	SMD1210P 050TF
FSMD 075-1210-R	microSMD 075F	MF-USMF 075	1210L 075	SMD1210P 075TF
FSMD 075-24-1210R	-- --	-- --	1210L 075/24	SMD1210P 075TF/24
FSMD 110-1210R	microSMD 110F	MF-USMF 110	1210L 110	SMD1210P 110TFT
FSMD 110-16-1210R	-- --	-- --	1210L 110/16	SMD1210P 110TF/16
FSMD 150-1210R	microSMD 150F	MF-USMF 150	1210L 150	SMD1210P 150TFT
FSMD 175-1210R	microSMD 175F	MF-USMF 175X	1210L 175X	SMD1210P 175TF
FSMD 200-1210R	microSMD 200F	-- --	1210L 200	SMD1210P 200TF
FSMD 005-1206-R	-- --	-- --	-- --	-- --
FSMD 010-1206-R	-- --	-- --	-- --	-- --
FSMD 012-1206-R	nanoSMDC 012F	MF-NSMF 012	1206L 012	SMD1206P 012TF
FSMD 016-1206-R	nanoSMDC 016F	-- --	1206L 016	SMD1206P 016TF
FSMD 020-1206-R	nanoSMDC 020F	MF-NSMF 020X	1206L 020	SMD1206P 020TF/24
FSMD 025-1206-R	nanoSMDC 025F	-- --	1206L 025	SMD1206P 025TF
FSMD 025-24-1206-R	-- --	-- --	-- --	SMD1206P 025TF/24
FSMD 035-1206-R	nanoSMDC 035F	MF-NSMF 035	1206L 035/16	SMD1206P 035TF/16
FSMD 035-30-1206R	-- --	MF-NSMF 035X	-- --	SMD1206P 035TF/30
FSMD 050-1206-R	-- --	-- --	1206L 050	SMD1206P 050TF
FSMD 050-24-1206R	nanoSMDC 050F/13.2	MF-NSMF 050	1206L 050/15	SMD1206P 050TF/15
FSMD 075-1206R	nanoSMDC 075F	MF-NSMF 075	1206L 075	SMD1206P 075TFT
FSMD 075-16-1206R	-- --	-- --	1206L 075/13.2	SMD1206P 075TF/13.2
FSMD 100-1206R	-- --	-- --	-- --	SMD1206P 110TF
FSMD 110-1206R	nanoSMDC 110F	MF-NSMF 110	1206L 110	SMD1206P 110TFT
FSMD 110-16-1206R	-- --	-- --	-- --	SMD1206P 110TFT/16
FSMD 150-1206R	nanoSMDC 150F	MF-NSMF 150	1206L 150	SMD1206P 150TFT
FSMD 200-1206R	nanoSMDC 200F	MF-NSMF 200	1206L 200	SMD1206P 200TF
FSMD 010-0805-R	picoSMDC 010S	MF-PSMF 010X	0805L 010	SMD0805P 010TF
FSMD 020-0805-R	picoSMDC 020S	MF-PSMF 020X	0805L 020	SMD0805P 020TF
FSMD 035-0805-R	picoSMDC 035S	MF-PSMF 035X	0805L 035	SMD0805P 035TF
FSMD 050-0805R	picoSMDC 050S	MF-PSMF 050X	0805L 050	SMD0805P 050TF
FSMD 050-9-0805R	-- --	-- --	-- --	SMD0805P 050TF/9
FSMD 075-0805R	picoSMDC 075S	MF-PSMF 075X	0805L 075	SMD0805P 075TF
FSMD 100-0805R	picoSMDC 110S	MF-PSMF 110X	0805L 100	SMD0805P 100TF
FSMD 001-0603-R	-- --	-- --	-- --	-- --
FSMD 002-0603-R	-- --	-- --	-- --	-- --
FSMD 003-0603-R	-- --	-- --	-- --	-- --
FSMD 004-0603-R	-- --	-- --	-- --	SMD0603P 004TF
FSMD 005-0603-R	femtoSMDC 005F	-- --	-- --	SMD0603P 005TF
FSMD 008-0603-R	femtoSMDC 008F	-- --	-- --	SMD0603P 008TF
FSMD 010-0603-R	femtoSMDC 010F	MF-FSMF 010X	0603L 010	SMD0603P 010TF
FSMD 012-0603-R	femtoSMDC 012F	-- --	-- --	-- --
FSMD 016-0603-R	femtoSMDC 016F	-- --	-- --	-- --
FSMD 020-0603-R	femtoSMDC 020F	MF-FSMF 020X	0603L 020	SMD0603P 020TF


Fuzetec	Tyco (Raychem)	Bourns	Littelfuse	Polytronics
FSMD 140RZ	-- --	MF-MSML 140	-- --	-- --
FSMD 190RZ	-- --	MF-MSML 190	1812L 190SL	SMD1812P 190SLR
FSMD 270RZ	-- --	MF-MSML 270	1812L 270SL	SMD1812P 270SLR
FSMD 300RZ	-- --	MF-MSML 300	1812L 300SL	SMD1812P 300SLR
FSMD 370RZ	-- --	MF-MSML 370	1812L 370SL	SMD1812P 370SLR
FSMD 500RZ	-- --	MF-MSML 500	-- --	SMD1812P 500SLR
FSMD 600RZ	-- --	MF-MSML 600	-- --	SMD1812P 600SLR
FSMD 175-1210RZ	-- --	MF-USML 175	1210L 175SL	SMD1210P 175SLR
FSMD 200-1210RZ	microSMD 200LR	MF-USML 200	1210L 200SL	SMD1210P 200SLR
FSMD 260-1210RZ	-- --	-- --	1210L 260SL	SMD1210P 260SLR
FSMD 300-1210RZ	-- --	MF-USML 300	1210L 300SL	SMD1210P 300SLR
FSMD 350-1210RZ	microSMD 350LR	MF-USML 350	1210L 350SL	SMD1210P 350SLR
FSMD 380-1210RZ	microSMD 380LR	MF-USML 380	1210L 380SL	SMD1210P 380SLR
FSMD 400-1210RZ	-- --	MF-USML 400	1210L 400SL	SMD1210P 400SLR
FSMD 450-1210RZ	-- --	-- --	1210L 450SL	SMD1210P 450SLR
FSMD 650-1210RZ	-- --	-- --	1210L 650SL	SMD1210P 650SLR
FSMD 050-1206RZ	-- --	-- --	1206L 050SL	SMD1206P 050SLR
FSMD 075-1206RZ	-- --	-- --	1206L 075SL	SMD1206P 075SLR
FSMD 110-1206RZ	-- --	-- --	1206L 110SL	SMD1206P 110SLR
FSMD 150-1206RZ	-- --	MF-NSML 150	1206L 150SL	SMD1206P 150SLR
FSMD 175-1206RZ	nanoSMD 175LR	MF-NSML 175	1206L 175SL	SMD1206P 175SLR
FSMD 200-1206RZ	nanoSMD 200LR	MF-NSML 200	1206L 200SL	SMD1206P 200SLR
FSMD 260-1206RZ	-- --	MF-NSML 260	1206L 260SLTH	SMD1206P 260SLR
FSMD 300-1206RZ	-- --	MF-NSML 300	1206L 300SLTH	SMD1206P 300SLR
FSMD 350-1206RZ	nanoSMD 350LR	MF-NSML 350	1206L 350SLTH	SMD1206P 350SLR
FSMD 380-1206RZ	nanoSMD 380LR	MF-NSML 380	1206L 380SLTH	SMD1206P 380SLR
FSMD 450-1206RZ	-- --	MF-NSML 450	1206L 450SL	SMD1206P 450SLR
FSMD 500-1206RZ	nanoSMD 500LR	-- --	1206L 500SL	SMD1206P 500SLR
FSMD 600-1206RZ	-- --	-- --	1206L 600SL	SMD1206P 600SLR
FSMD 075-0805RZ	-- --	MF-PSML 075	0805L 075SL	SMD0805P 075SLR
FSMD 110-0805RZ	-- --	MF-PSML 110	0805L 110SL	SMD0805P 110SLR
FSMD 125-0805RZ	-- --	-- --	0805L 125SL	SMD0805P 125SLR
FSMD 150-0805RZ	-- --	MF-PSML 150	0805L 150SL	SMD0805P 150SLR
FSMD 175-0805RZ	-- --	MF-PSML 175	0805L 175SL	SMD0805P 175SLR
FSMD 200-0805RZ	-- --	MF-PSML 200	0805L 200SLTH	SMD0805P 200SLR
FSMD 025-0603RZ	-- --	MF-FSMF 025X	0603L 025	SMD0603P 025TF
FSMD 035-0603RZ	-- --	MF-FSMF 035X	0603L 035	SMD0603P 035TF
FSMD 050-0603RZ	-- --	MF-FSMF 050X	0603L 050SL	SMD0603P 050SLR
FSMD 075-0603RZ	-- --	-- --	0603L 075SL	SMD0603P 075SLR
FSMD 100-0603RZ	-- --	-- --	0603L 100SL	SMD0603P 100SLR
FSMD 010-0402RZ	-- --	-- --	0402L 010SL	SMD0402P 010SLR
FSMD 020-0402RZ	-- --	-- --	0402L 020SL	SMD0402P 020SLR
FSMD 035-0402RZ	-- --	-- --	0402L 035SL	SMD0402P 035SLR
FSMD 050-0402RZ	-- --	-- --	0402L 050SL	SMD0402P 050SLR

Thermal Derating for PPTC Device at Various Ambient Temperatures.

FUZETEC PPTC Family	-40°C	-20°C	0°C	23°C	30°C	40°C	50°C	60°C	70°C	85°C	125°C
FRX-60/90	158%	138%	119%	100%	90%	81%	70%	60%	50%	36%	-
FRU	145%	130%	115%	100%	92%	84%	76%	70%	61%	50%	-
FRT	148%	134%	120%	100%	98%	90%	84%	78%	70%	59%	-
FUSB	145%	130%	115%	100%	91%	83%	78%	70%	61%	50%	-
FRG	148%	132%	116%	100%	91%	84%	76%	69%	60%	48%	-
FHT	143%	129%	116%	100%	93%	87%	80%	72%	65%	55%	26%
FRHV	158%	138%	119%	100%	92%	83%	73%	64%	54%	40%	-
FRVL	158%	138%	119%	100%	90%	80%	70%	60%	50%	38%	-
FRV	150%	134%	116%	100%	90%	81%	74%	65%	58%	44%	-
FSMD-2920	158%	138%	119%	100%	90%	81%	72%	60%	50%	36%	-
FSMD-1812	145%	130%	116%	100%	91%	84%	78%	69%	61%	50%	-
FSMD-1210	145%	130%	115%	100%	92%	83%	76%	70%	62%	50%	-
FSMD-1206	145%	130%	115%	100%	92%	84%	78%	69%	62%	50%	-
FSMD-0805	145%	130%	116%	100%	91%	84%	76%	69%	61%	50%	-
FSMD-0603	157%	137%	118%	100%	89%	80%	70%	60%	51%	37%	-
FVL	195%	163%	132%	100%	85%	68%	53%	38%	21%	-	-
FVT	172%	149%	124%	100%	90%	78%	65%	53%	41%	23%	-
FSR	152%	135%	118%	100%	90%	82%	74%	65%	56%	42%	-
FLR	147%	132%	117%	100%	94%	86%	80%	71%	61%	52%	-
Low Rho FSMD-1812/1210/1206/0805/0603/0402	145%	130%	115%	100%	92%	84%	77%	69%	61%	50%	-
FSL	184%	158%	131%	100%	93%	79%	67%	54%	40%	20%	-

Pad Layouts & Solder Reflow Recommendations

The dimensions in the table below provide the recommended pad layout for Surface Mount Device in different footprints.

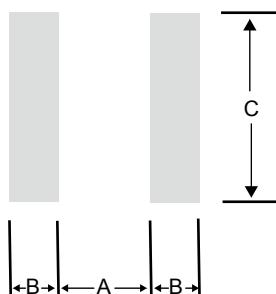

Device	Pad dimensions (Millimeter)		
	A Nominal	B Nominal	C Nominal
All 2920 Series	5.10	2.30	5.60
All 1812 Series	3.45	1.78	3.50
All 1210 Series	2.00	1.00	2.80
All 1206 Series	2.00	1.00	1.90
All 0805 Series	1.20	1.00	1.50
All 0603 Series	0.80	0.60	0.80
All 0402 Series	0.40	0.60	0.70

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate (Tsmax to Tp)	3°C/second max.
Preheat : Temperature Min (Tsmin) Temperature Max (Tsmax) Time (tsmin to tsmax)	150°C 200°C 60-180 seconds
Time maintained above : Temperature(TL) Time (tL)	217°C 60-150 seconds
Peak/Classification Temperature(Tp) :	260°C
Time within 5°C of actual Peak : Temperature (tp)	20-40 seconds
Ramp-Down Rate :	6 °C/second max.
Time 25°C to Peak Temperature :	8 minutes max.

Note 1 : All temperatures refer to the package, measured on the package body surface.


Solder reflow

* Due to " Lead Free " nature, Temperature and Dwelling Time for the soldering zone is higher than those for Regular. This may cause damage to other components.



1. Recommended max paste thickness > 0.25mm.
2. Devices can be cleaned using standard methods and aqueous solvent.
3. Rework use standard industry practices.
4. Storage Environment : < 30°C / 60% RH

Caution :


1. If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.
2. Devices are not designed to be wave soldered to the bottom side of the board

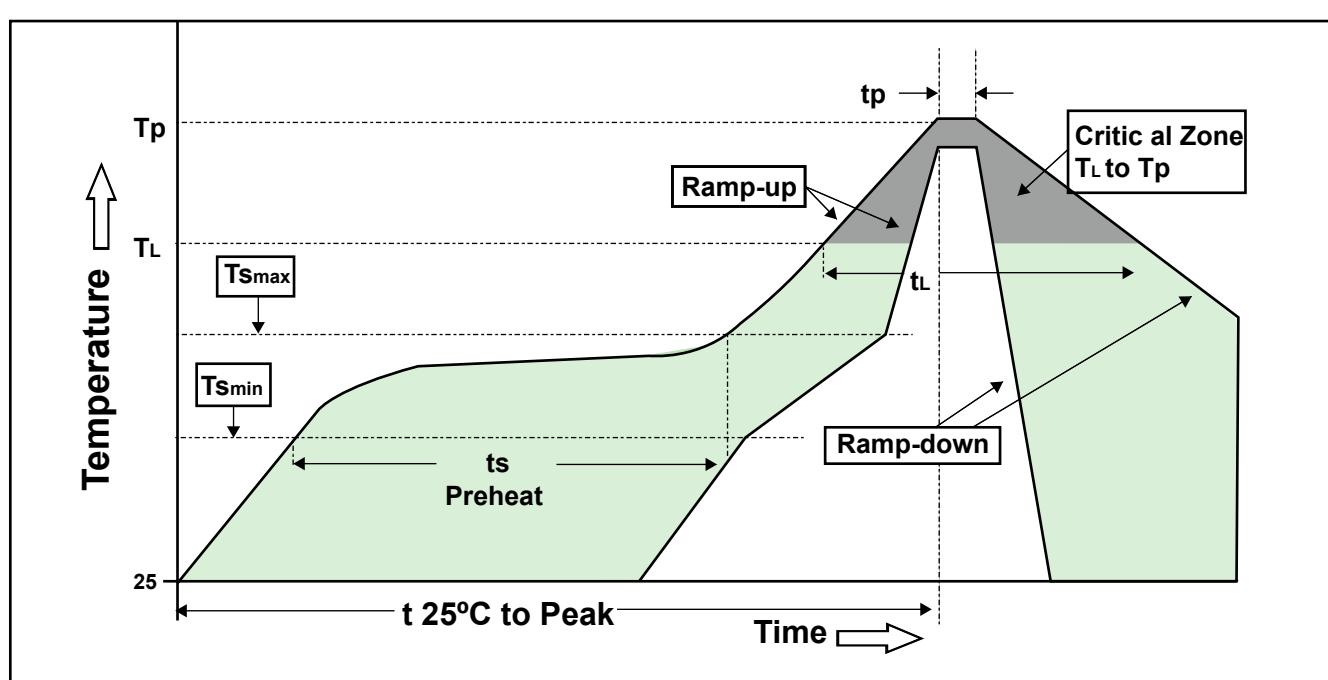

The conductive carbon black particles in Fuzetec's PPTC resettable fuses are dispersed in a polymer that has a crystalline structure. At normal operating conditions there are numerous carbon chains forming conductive paths through the material. Under fault conditions (Tripped State), excessive current flows through the PPTC device and the PTC material heats up making the conductive particles move apart from each other, most of them no longer conduct current and the resistance of the device increases sharply. Upon fault current being removed, the resettable fuse is resetted and allows the current through the circuit again.

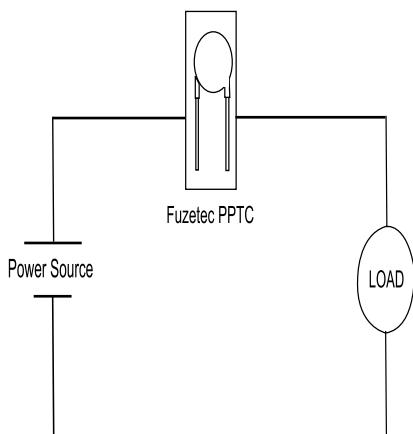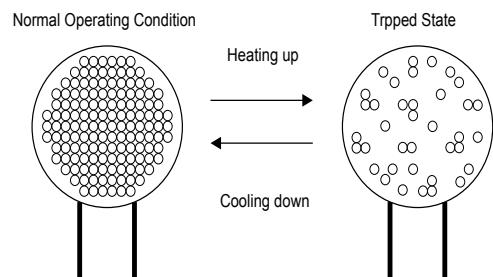

When connected in series to a circuit, Fuzetec's PPTC resettable fuses remain at extremely low resistance and allow the electrical current to flow through it without any restriction. When overcurrent situations occur, Fuzetec PPTC resettable fuses limit the current to a very small value and therefore protect the circuit from being damaged by the high current.

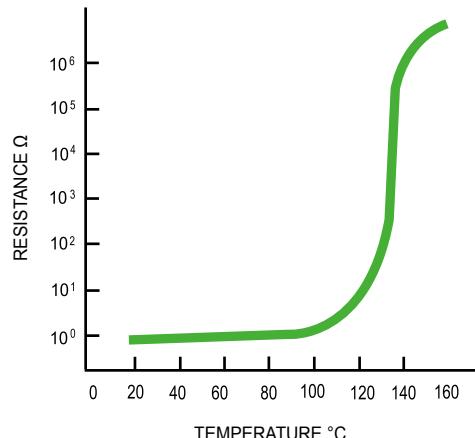

PPTC Applications by Industry

Telecom & Communications	ADSL, VDSL Cable Modems, Set Top Box MDF Module	Customer Premise Equipment/UL-1495 Telecom Network Equipment
Computer / Consumer Electronics	Mother board USB & IEEE1394 & I/O Card Portable Game	Printer, Scanner, Modem Digital Audio & Video Equipment GPS Navigation
Industrial, Power Supply & Other Electronics	Power Supply Devices Ballast Motors, Fans & Blowers Security & Fire Alarm Systems	Test & Measurement Equipment Industrial Process Controls (IPC) Speakers Other Consumer Electronics
Automotive Industry	Automobile cigar-lighter adapters (CLAs) Wire Harness Automotive Security Alarm & other Automotive Electronics Automotive actuators & motors (i.e. Power Windows) Door Locks, Power Sunroofs, Power Seats, Door Mirrors	
Battery & Portable Electronics	PCM Module ; Battery Cell & Battery Packs Battery Chargers Notebook, PDA, Smart Phone & Tablet PC Batteries	

Fill in the following BLANKS to help us out in suggesting the “Right” product for your applications

1. Determine the followings to define your circuit operation parameter,

Normal operating current : _____ Typical fault current : _____

Normal operating voltage : _____ Required opening time at fault : _____

Maximum interrupt current : _____ Form factor : _____

Maximum operating voltage : _____

Maximum Ambient Temperature/ Derating : Between _____ °C and _____ °C

Typical resistance (in circuit) : _____ Agency approvals : _____

2. Select the appropriate Fuzetec series from the table listed below :

Fuzetec Family	Voltage	Hold Current	Form factor	Application
FRX	60V _{DC}	0.05A~3.75A	Radial Leaded	Wide Variety of Electronic Equipment
FRX90V	72V _{DC} /90V _{DC}	0.10A~3.75A	Radial Leaded	Wide Variety of Electronic Equipment
FRU	30 V _{DC}	0.90A~9.00A	Radial Leaded	Wide Variety of Electronic Equipment
FRT	36V _{DC}	0.50A~2.50A	Radial Leaded	IEEE1394 Firewire & Consumer Electronics
FUSB	16V _{DC} /30V _{DC}	0.75A~2.50A	Radial Leaded	Low Voltage USB Equipment
FRG	16V _{DC}	2.5A~14.0A	Radial Leaded	Wide Variety of Electronic Equipment
FHT	16V _{DC} /30V _{DC}	0.50A~15.00A	Radial Leaded	Wide operating temperatures up to 125 °C
FRHV	60V/100V/250V	0.08A~0.40A	Radial Leaded	Telecommunication and Network
FRVL	120V _{AC/DC}	0.10A ~3.75A	Radial Leaded	Line Voltage Application
FRV	240V _{AC/DC}	0.50A~2.00A	Radial Leaded	Line Voltage Application
FSMD2920	6V~60V _{DC}	0.30A~3.00A	Surface Mount	All High-Density Board
FSMD1812	6V~60V _{DC}	0.10A~3.00A	Surface Mount	All High-Density Board
FSMD1210	6V~60V _{DC}	0.05A ~2.00A	Surface Mount	All High-Density Board
FSMD1206	6V~60V _{DC}	0.05A ~2.00A	Surface Mount	All High-Density Board
FSMD0805	6V~15V _{DC}	0.10A~1.00A	Surface Mount	All High-Density Board
FSMD0603	9V~60V _{DC}	0.01A~0.20A	Surface Mount	All High-Density Board
FVL	12V _{DC}	1.70A~2.30 A	Axial Leaded	Rechargeable Battery Packs, Lithium Cell and Battery Packs
FVT	16V _{DC}	1.10A~2.40 A	Axial Leaded	Rechargeable Battery Packs, Lithium Cell and Battery Packs
FSR	15V _{DC} /30V _{DC}	1.20A~4.20A	Axial Leaded	Rechargeable Battery Packs
FLR	15V _{DC} /20V _{DC}	1.90A~7.30A	Axial Leaded	Rechargeable Battery Packs
Low Rho FSMD1812	6V _{DC}	1.40A~6.00A	Surface Mount	Ultra Low Resistance
Low Rho FSMD1210	6V _{DC}	1.75A ~6.50A	Surface Mount	Ultra Low Resistance
Low Rho FSMD1206	6V _{DC}	0.50A ~5.00A	Surface Mount	Ultra Low Resistance
Low Rho FSMD0805	6V _{DC}	0.75A~2.00A	Surface Mount	Ultra Low Resistance
Low Rho FSMD0603	6V _{DC} ~9V _{DC}	0.25A~1.00A	Surface Mount	Ultra Low Resistance
Low Rho FSMD0402	6V _{DC}	0.10A~0.50A	Surface Mount	Ultra Low Resistance
Low Rho Strap FSL	6V _{DC}	1.40A~7.00A	Axial Leaded	Ultra Low Resistance for Portable Electronics Rechargeable Battery Packs Protection

3. Fill in the followings :

a) Quantity of samples requested : _____

b) Application Type : _____

c) Company name : _____

d) Address : _____

Contact Person : _____ Position : _____

Tel : _____ Fax : _____

E-mail : _____ Website : _____

e) Type of Business : _____