


NOSE ASSEMBLY DATA SHEET

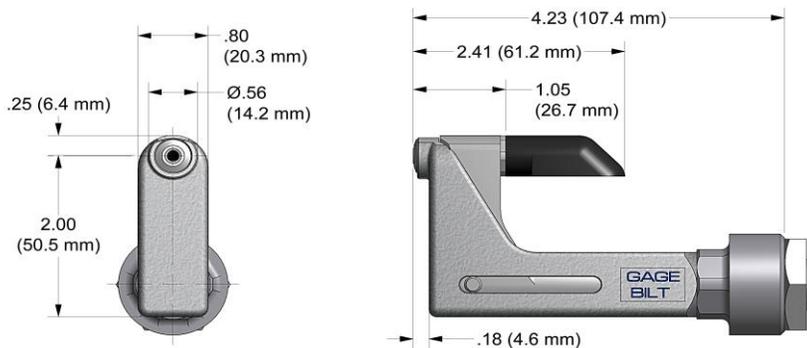


CAUTION:
Do not operate if pintail deflector is removed. Pintail may eject forcibly. SEVERE PERSONAL INJURY MAY RESULT.

Attachment

Screw nose assembly onto tool until it stops then back off until nose is in desired position. (Warning: do not back off nose assembly more than one complete turn). Lock jam nut (70336) against adapter (70332)

WARNING:
KEEP FINGERS AND HANDS AWAY FROM NOSE ASSEMBLY DURING OPERATION TO PREVENT SEVERE PERSONAL INJURY.

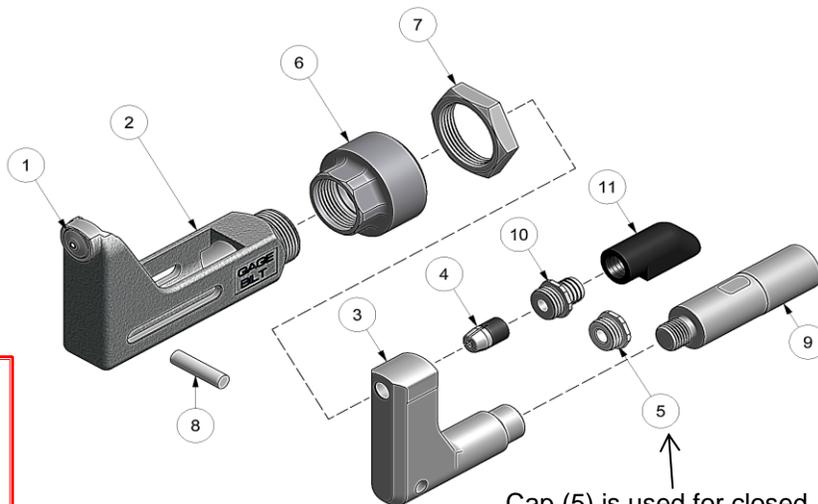

Cap (5) is used for closed access applications only or when clearance is an issue.

**USE ADAPTER 745751 & DO NOT USE # (7) JAM NUT 70336.

9/06 Rev. 12/15



GAGE BILT

MADE IN U.S.A.

GAGE BILT Inc.

44766 Centre Court (586) 226-1500
Clinton Twp. MI 48038 (586) 226-1505 Fax
e-mail:solutions@gagebilt.com / www.gagebilt.com

Type:		Fasteners:	Recommended Tool: GB751
Non Self-Releasing *3/16" Ø		NAS1398A/1399A RV 1000/1100 & 1200 *1/4 Ø AF5075 / AF5076 / S149A020	Alternate Tools: GB722 & **GB745
Ref. No.	Qty.	Description	6A-752A-43OS
1	1	Anvil Insert	16028
2	1	Anvil & Holder Assy (Inc. #1)	12219
3	1	Collet	20911
4	1	Super-Grip Jaw Assy	30656-S3
5	1	Cap	60428
6	1	Anvil Adapter	70331
7	1	Jam Nut	70336
8	1	Pin	70468
9	1	Collet Adapter	70332
10	1	Barbed Retainer	60440
11	1	Deflector	61107