

FAST RECOVERY RECTIFIERS

VOLTAGE RANGE: 200 --- 1000 V
CURRENT: 1.0 A


FEATURES

- ◇ Low cost
- ◇ Glass passivated junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case: JEDEC DO-41, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.34 grams
- ◇ Mounting position: Any

DO - 41

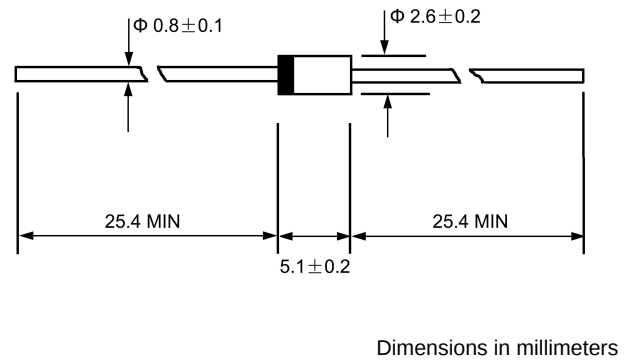

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		1N 4942G	1N 4944G	1N 4946G	1N 4947G	1N 4948G	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	200	400	600	800	1000	V
Maximum average forw ard rectified current 9.5mm lead length, @T _A =75°C	I _{F(AV)}	1.0					A
Peak forw ard surge current 8.3ms single half-sine-w ave superimposed on rated load @T _J =125°C	I _{FSM}	30.0					A
Maximum instantaneous forw ard voltage @ 1.0 A	V _F	1.3					V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =125°C	I _R	5.0 100					μ A
Maximum reverse recovery time (Note1)	t _{rr}	150		250		500	ns
Typical junction capacitance (Note2)	C _J	12					pF
Typical thermal resistance (Note3)	R _{θJA}	55					°C/W
Operating junction temperature range	T _J	- 55---- +150					°C
Storage temperature range	T _{STG}	- 55---- + 150					°C

NOTE: 1. Measured with $I_F = 0.5\text{A}$, $I_R = 1\text{A}$, $t_{rr} = 0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

www.galaxycn.com

FIG.1 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

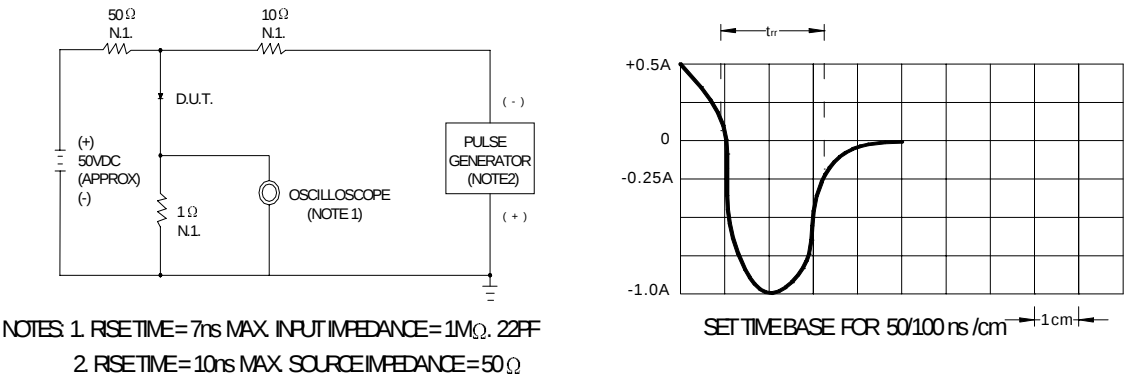


FIG.2 –FORWARD DERATING CURVE

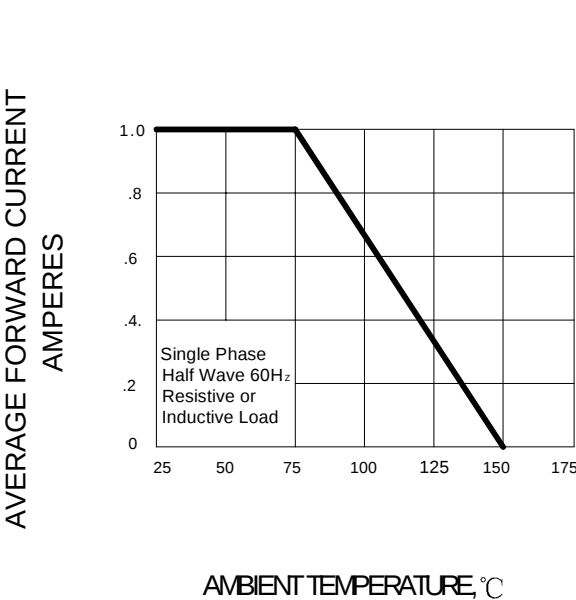


FIG.3 – TYPICAL FORWARD CHARACTERISTICS

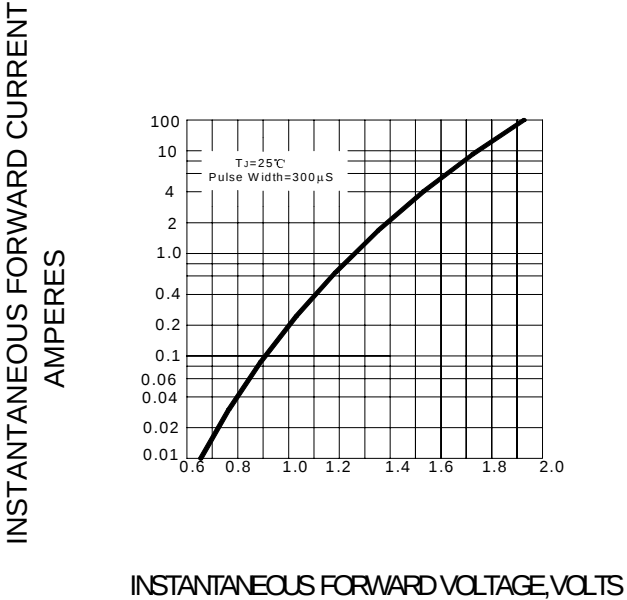


FIG.4-PEAK FORWARD SURGE CURRENT

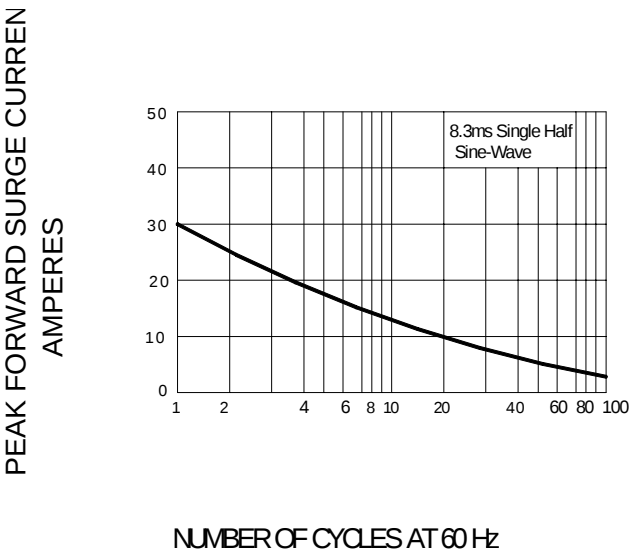


FIG.5- TYPICAL JUNCTION CAPACITANCE

